

contactor-LTG-combo,CB,20A,N12, contactor-LTG-combo,CB,20A,N12,



Figure similar

Product brand name	Class CM
Design of the product	Mechanically held lighting contactor with circuit breaker
Special product feature	Energy efficient; Quiet operation

General technical data	
Weight [lb]	35 lb
Height x Width x Depth [in]	24 × 11 × 8 in
Protection against electrical shock	NA for enclosed products
Installation altitude [ft] at height above sea level maximum	6560 ft
Country of origin	USA

Contactor	
Size of contactor	20 Amp
Number of NO contacts for main contacts	3
Number of NC contacts for main contacts	0
Operating voltage for main current circuit at AC at 60 Hz maximum	600 V
Contact rating of the main contacts of lighting contactor	

• at tungsten (1 pole per 1 phase) rated value	20A @250V 1p 1ph
• at tungsten (2 poles per 1 phase) rated value	20A @250V 2p 1ph
• at tungsten (3 poles per 3 phases) rated value	20A @250V 3p 3ph
• at ballast (1 pole per 1 phase) rated value	20A @347V 1p 1ph
• at ballast (2 poles per 1 phase) rated value	20A @600V 2p 1ph
• at ballast (3 poles per 3 phases) rated value	20A @600V 3p 3ph
• at resistive load (1 pole per 1 phase) rated value	30A @347V 1p 1ph
• at resistive load (2 poles per 1 phase) rated value	30A @600V 2p 1ph
• at resistive load (3 poles per 3 phases) rated value	30A @600V 3p 3ph

Auxiliary contact

Number of NC contacts for auxiliary contacts	0
Number of NO contacts for auxiliary contacts	0
Number of total auxiliary contacts maximum	4
Contact rating of auxiliary contacts of contactor according to UL	NA

Coil

Type of voltage of the control supply voltage	AC
Control supply voltage	
• at AC at 50 Hz rated value	265 ... 277 V
• at AC at 60 Hz rated value	265 ... 277 V
Apparent pick-up power of magnet coil at AC	600 V·A
Apparent holding power of magnet coil at AC	6 V·A
Operating range factor control supply voltage rated value of magnet coil	0.85 ... 1.1

Enclosure

Degree of protection NEMA rating of the enclosure	NEMA 12 enclosure
Design of the housing	Dust tight and drip proof for indoors

Circuit Breaker

Type of the motor protection	Circuit breaker with thermal and fixed magnetic trip
Operating current of motor circuit breaker rated value	20 A

Mounting/wiring

Mounting position	Vertical
Mounting type	Surface mounting and installation
Type of electrical connection for supply voltage line-side	Box lug
Type of connectable conductor cross-sections at line-side at AWG conductors single or multi-stranded	1x (14 AWG ... 10 AWG) or 1x (12 AWG ... 10 AWG)
Temperature of the conductor for supply maximum permissible	75 °C

Material of the conductor for supply	AL or CU
Type of electrical connection for load-side outgoing feeder	Screw-type terminals
Tightening torque [lbf·in] for load-side outgoing feeder	18 ... 18 lbf·in
Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder single or multi-stranded	2x (18 ... 10 AWG)
Temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
Material of the conductor for load-side outgoing feeder	CU
Type of electrical connection of magnet coil	Screw-type terminals
Tightening torque [lbf·in] at magnet coil	18 ... 18 lbf·in
Type of connectable conductor cross-sections of magnet coil at AWG conductors single or multi-stranded	2x (18 ... 10 AWG)
Temperature of the conductor at magnet coil maximum permissible	75 °C
Material of the conductor at magnet coil	CU

Short-circuit current rating

Design of the short-circuit trip	Thermal magnetic circuit breaker
Maximum short-circuit current breaking capacity (I _{cu})	
<ul style="list-style-type: none"> • at 240 V • at 480 V • at 600 V 	5 kA 5 kA 5 kA
Certificate of suitability	NEMA ICS 2; UL 508; CSA 22.2, No. 14

Further information

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:CMBB24277>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/US/en/ps/US2:CMBB24277>



Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:CMBB24277&lang=en

Certificates/approvals

<https://support.industry.siemens.com/cs/US/en/ps/US2:CMBB24277/certificate>

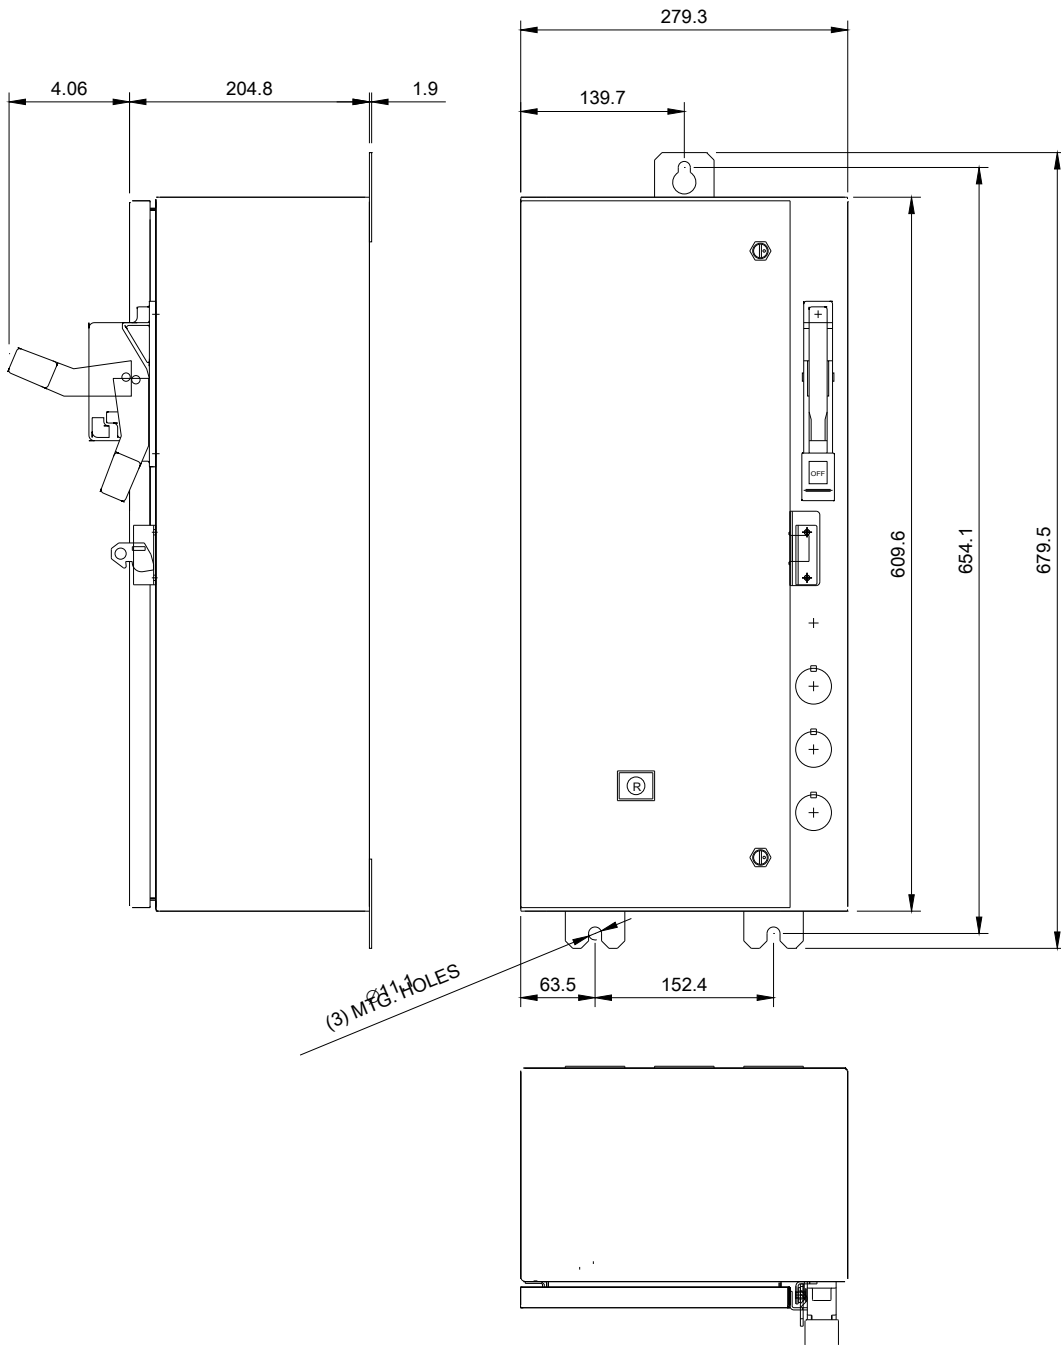

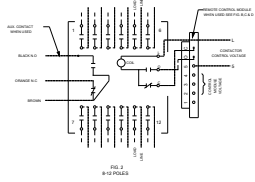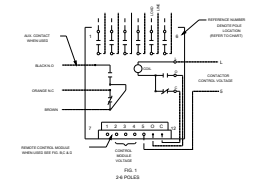

CONTACT FILE LOCATION CHART

POLE	LOCATION
1	1 & 11
2	2 & 12
3	3 & 13
4	4 & 14
5	5 & 15
6	6 & 16
7	7 & 17
8	8 & 18
9	9 & 19
10	10 & 20
11	11 & 21
12	12 & 22

AUXILIARY CONTACT RATINGS
 ACC. CLAMPER (SPST)
 ACC. CLAMPER (SPDT)







MAIN CONTACT MAINLINE VOLTAGE RATINGS OPEN OR CLOSED

POLES	1 FOR 1/2 AC	2 FOR 1/2 AC	3 FOR 1/2 AC	4 FOR 1/2 AC	5 FOR 1/2 AC	6 FOR 1/2 AC	7 FOR 1/2 AC	8 FOR 1/2 AC	9 FOR 1/2 AC	10 FOR 1/2 AC	11 FOR 1/2 AC	12 FOR 1/2 AC
250V AC	250V AC	250V AC	250V AC	250V AC	250V AC	250V AC	250V AC	250V AC	250V AC	250V AC	250V AC	250V AC
370V AC	370V AC	370V AC	370V AC	370V AC	370V AC	370V AC	370V AC	370V AC	370V AC	370V AC	370V AC	370V AC
500V AC	500V AC	500V AC	500V AC	500V AC	500V AC	500V AC	500V AC	500V AC	500V AC	500V AC	500V AC	500V AC

20 AMP. DC
 200V DC MAX. 2 POLES IN SERIES
 100V DC MAX. 2 POLES IN SERIES

SWITCH IS SUITABLE FOR USE IN A CIRCUIT
 CAPABLE OF INTERRUPTING NOT MORE THAN THE
 RATED INTERRUPTING CAPACITY AT THE NOMINAL
 VOLTAGE SHOWN. THESE DATA ARE SUBJECT TO
 A 50 AMP. CIRCUIT BREAKER BEING INSTALLED AT
 INTERRUPTING VOLTAGE OF NOT LESS THAN
 VOLTAGE SHOWN.

AMPERES	VOLTS
20.000	250
1.0000	480
10.000	600

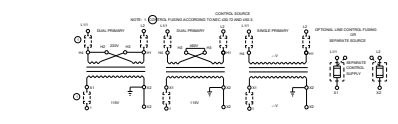

CONNECTIONS TO CONTROL MODULES

MODULE TERMINAL	CONNECT TO
1	NOT USED
2	CONTROL VOLTAGE FOR ACC. 47
3	CONTROL VOLTAGE FOR ACC. 47
4	MODULE CONTROL VOLTAGE
5	CONTROL VOLTAGE FOR ACC. 47
6	CONTROL VOLTAGE FOR ACC. 47
7	CONTROL VOLTAGE FOR ACC. 47
8	CONTROL VOLTAGE FOR ACC. 47
9	CONTROL VOLTAGE FOR ACC. 47
10	CONTROL VOLTAGE FOR ACC. 47
11	CONTROL VOLTAGE FOR ACC. 47
12	CONTROL VOLTAGE FOR ACC. 47

* FOR 20 AMP. CONTROL MODULES
 CONNECT TO TERMINAL 8 TO NEGATIVE (-)

- GENERAL NOTES**
- WHEN CONTACTOR & LINE VOLTAGE ARE THE SAME, THE CONTACTOR CONTROL VOLTAGE LINE SHOULD BE DERIVED FROM THE LINE POLES OF THE CONTACTOR SWITCH.
 - MAIN CONTACTS ARE SHOWN IN OPEN POSITION WITH CONTROL LINE DE-ENERGIZED. SEE RATINGS BELOW SWITCH (SHIPPED WITH CONTACTS CLOSED).
 - LINE & LINE TERMINALS ARE INTERCHANGEABLE.
 - CONTACTS ARE SINGLE THROW DOUBLE BREAK, WITH MECHANICALLY INTERLOCKED SINGLE COIL OPERATOR (MECHANICALLY FULLY INTERLOCKED & CLOSED POSITIONS).
 - CUSTOMER CONNECTIONS TO LINE & LOAD WILL ACCEPT 50% BURDEN TO 200% CONTROL LINE. TORQUE LINE POLE CONNECTION TO 10 & 11.
 - CUSTOMER CONNECTIONS TO ELECTRONIC MODULE (ACC. 47) AS SHOWN WILL ACCEPT 10% BURDEN TO 200% CONTROL LINE. TORQUE CONTROL TERMINALS TO 10 & 11.
 - CONTROL MODULE VOLTAGE SUPPLIED BY CUSTOMER.

24306100401

last modified:

11/28/2019