PANDUIT P/N	WEIGHT
P24B29M	9.6kg

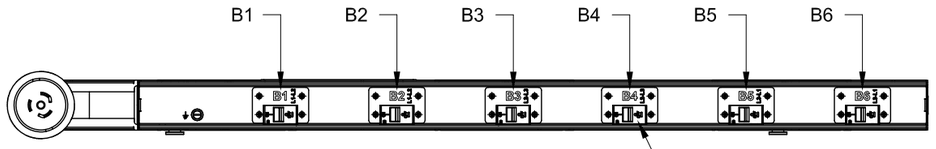

REAR VIEW

20 AMP, DOUBLE - POLE
ELECTRO MECHANICAL
SWITCH / BREAKER (6) PLACES

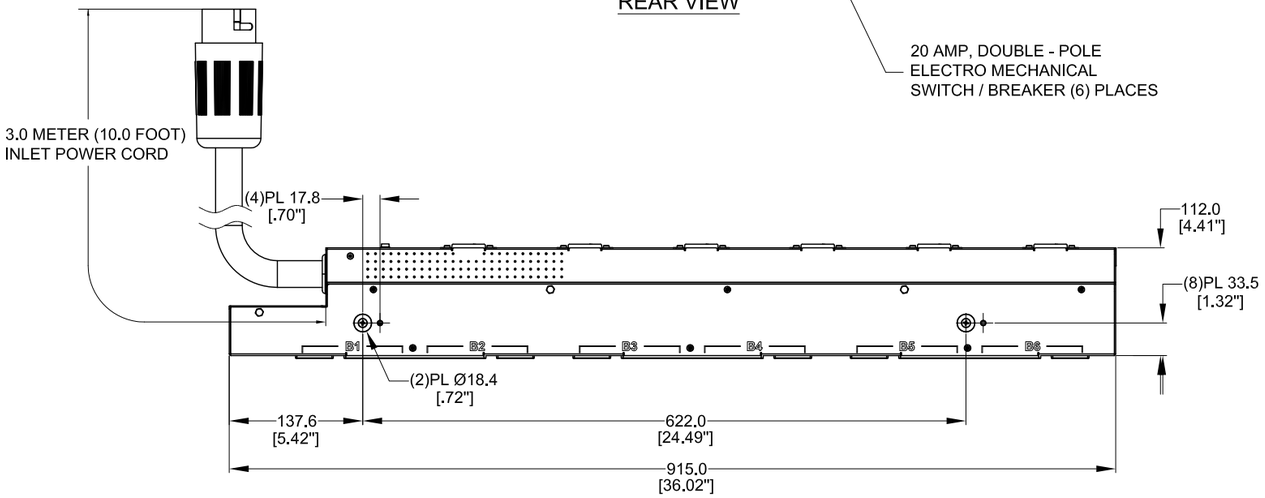

TOP VIEW

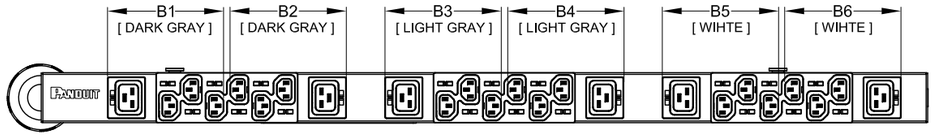

FRONT VIEW

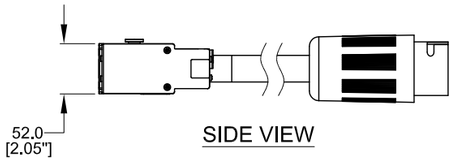

SIDE VIEW

NOTES:

1. IDENTIFICATION:

UNIT TYPE:	BASIC
ORIENTATION:	VERTICAL, 0U HALF, 2-SIDED
OUTLET QTY&TYPE:	(18) C13, (6) C19
BREAKER QTY&TYPE:	(6) 20AMP, DOUBLE-POLE
INPUT VOLTAGE:	200-240VAC, DELTA
INPUT CURRENT:	50A (40A DERATED)
INPUT PHASE:	THREE-PHASE DELTA
RATED POWER:	14.4kVA
INPUT PLUG:	HUBBELL CS8365C
INPUT CORD LENGTH:	3m [10']

2. ACCESSORIES:
   POCKET GUIDE
3. RoHS COMPLIANT
4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
5. MAXIMUM ALLOWABLE INPUT POWER = 14.4kW
6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES



PLUG
50 AMP, 250V x 3~ DELTA
TWIST LOCK
NEMA CS-8365C

SIX (6)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320/C19



EIGHTEEN (18)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN
DATE
PRINT

TITLE:
BASIC SERIES PDU
P24B29M
CUSTOMER DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)	
0<L≤200	±0.5
200<L≤500	±1.5
500<L≤1000	±2.5
1000<L≤2000	±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR:
N/A

DRAWING NUMBER:
P24B29M_DC

DRAWN BY	DATE	CHK	SCALE		SCALE
KUN	05/24/2017	SEAN	NONE	SHT 1 OF 1	A