

Represented by:

Harrison Sales Company  
833 Willow Oak Circle  
Lexington, KY 40514

Phone: (859) 509-6671  
Fax: (859) 523-3942

# meter mounting EQUIPMENT

**Landis & Gyr Meter Mounting Devices**  
Siemens Energy & Automation, Inc.  
3333 Old Milton Parkway  
Alpharetta, GA 30005

[www.landisandgyr.com](http://www.landisandgyr.com)

© 2008 Siemens Energy & Automation, Inc. All Rights Reserved.  
Siemens is a registered trademark of Siemens AG. Product names mentioned may be trademarks or registered trademarks of their respective companies.  
Specifications are subject to change without notice.







## Contents

<b>Service</b>	<b>Rating</b>	<b>Positions</b>	<b>Terminals</b>	<b>Page</b>
Introduction and General Information	-	-	-	3-7
Residential, 1 Phase, 3 Wire	135A	1	4 & 5	8
Residential, 1 Phase, 3 Wire	200A	1	4 & 5	9
Residential, 1 Phase, 3 Wire, Side Wire	200A	1	4 & 5	10
Residential, 1 Phase, 3 Wire	100/150A	2-4	4 & 5	11
Residential, 1 Phase, 3 Wire	200A	2-6	4 & 5	12
Commercial, 1 Phase, 3 Wire	200A	1	4, 5 & 7	13
Commercial/Industrial, 1 Phase, 3 Wire, 3 Phase, 4 Wire	200A	1	4, 5 & 7	14
Residential/Commercial/Industrial, 1 Phase, 3 Wire	320A	1	4	15
Residential/Commercial, 3 Phase, 3 Wire, 4 Wire Wye or Delta	320A	1	5 & 7	16
Residential/Commercial, 1 Phase, 3 Wire	400A	1	4	17
Residential/Commercial/Industrial, 3 Ph., 3 or 4 Wire Wye or Delta	400/480A	1	5 & 7	18
Residential, 1 Phase, 3 Wire,	100/200A	1	4 7 5	19
Air Conditioning Disconnects	-	-	-	20
Spa Panel	-	-	-	21
Lugs	-	-	-	22, 23
Socket Accessories	-	-	-	24
Repair Parts, Terms & Conditions	-	-	-	25
Meter Mounting Device Applications	-	-	-	26

### Represented by:

Harrison Sales Company  
833 Willow Oak Circle  
Lexington, KY 40514

Phone: (859) 509-6671  
Fax: (859) 523-3942




## The Standard for Quality

For more than 50 years, Landis & Gyr has been manufacturing high quality meter mounting devices. From our proprietary K-Base to our heavy duty HQ lever bypass socket, Landis & Gyr is known throughout the industry for innovation and quality.

Landis & Gyr meter sockets are built for safety, ease of installation, and long term quality. That's why we use stainless steel hardware, polyester powder coat paint for long lasting protection, and Type G-90 galvanized steel or 3003 grade aluminum for all of our enclosures. It's also why we use an all-copper current path in our commercial sockets. All of this adds up to why utilities, OEM's, and contractors recognize Landis & Gyr across the country as the leader in design, quality, and workmanship. Quality is the reason many utilities and electricians specify Landis & Gyr.

Landis & Gyr- the standard for quality and design.

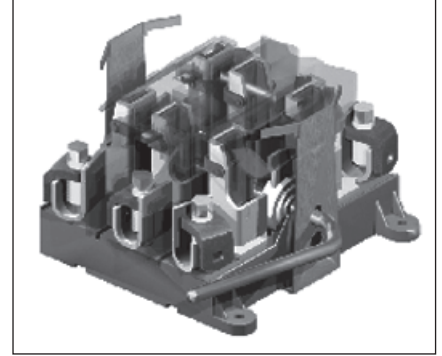

*HQ-7 Block Assembly - The Standard for Quality*

## General Information

### Materials:

16 gauge, galvanized steel, G-90  
14 gauge, galvanized steel, G-90  
14 gauge, aluminum  
12 gauge, aluminum

### Enclosures:

NEMA 3R

### Finish:

Steel - Light gray, baked on powder polyester  
Aluminum - Mill finish

### Latches:

All swing latches are stainless steel

### Block Material:

AS/AT, CQ, HQ, K-4 and K-7 - Glass reinforced polyester

### Terminals:

AS/AT - Tin-plated aluminum extrusions 6061-T6  
CQ, HQ, - Tin-plated copper

### Standards:

Products cataloged herein meet or exceed the following standards:  
UL 486B, UL 414, NEMA 250, ANSI C12.7 Florida Meter Group requirements

### Voltage:

All devices are rated at 600V AC  
Type K-4 rated at 300V AC



## Meter Socket Terminology

### Maximum and Continuous Ampacity

UL and NEMA standards allow most electrical devices to be tested at one amp level ("continuous"), then allowed 125% rating as "maximum". For example, a "400 Amp" socket may either mean 400 Amps continuous (K-4) or 400A Max, 320A continuous which is also made by most competitors.

### Wire Sizes - Ampacity

Connectors accept a fairly wide variety of wire sizes. On the AT socket, a 350 MCM connector accepts conductors from #6 up to 350 MCM. The NEC specifies the ampacity of each wire size and type, also taking into account how the wire is installed in conduit.

### Lay-in & Stud Terminals

Lay-in terminals are fixed and may not be modified in the field to accept other wire sizes or parallel conductors. Stud terminals accept either lugs (see Product Schedule 497) or compression fittings (not available from Landis & Gyr). Common uses for studs include where the field wiring may be either single or parallel. Terminals may be mixed on the line and load sides, e.g. stud on the line and lay-in on the load side.

### Ringless/Ring Style

Ring-type is an older, vanishing concept requiring a sealing ring. Landis & Gyr recently added tooling to build this type of socket for the few remaining utilities that require them. In ringless design, the seal is made not on a sealing ring but using the cover and "swing latch" as the point of sealing.

### Overhead/Underground

Sockets for UG service are usually wider in order to provide space for the conductors to loop around the block to the top connectors. Since more material is required in the enclosure, UG sockets are more expensive than OH sockets. Quite popular are combination units (OH/UG) which may be used in either service, and require a cover plate if used with UG feed.

### Hubs and Cover Plates

Top of socket with hub opening has a flanged lip to keep out moisture. This requires a hub or cover plate to close. There are two sizes of openings: "small" for conduit hubs with sizes of 1", 1-1/4", 1-1/2", 2", and 2-1/2"; and "large" for conduit hubs with sizes 3", 3-1/2", and 4". See Product Schedule 499. Landis & Gyr hub openings conform to ANSI C12.7 specs and are interchangeable with other socket manufacturers, but are not interchangeable with panel board style hubs.

### Bypass Types

A self-contained meter completes the circuit between the utility and the customer. In order to change the meter, the circuit must be broken, turning off the power to the customer. This is not acceptable in commercial establishments, or in many other types of services. A bypass allows a parallel path for the current flow, un-metered, while the meter is pulled.

Types are:

- a) Lever-operated jaw release, also known as jaw clamping lever bypass (Landis & Gyr type HQ). The best, because the meter cannot accidentally be pulled unless the bypass is engaged. Pulling the meter would also be a major safety hazard if there is a 480V installation and/or a large load in place, as the meter would then act as a switch, and cause arc.
- b) Lever-operated non-jaw release (Landis & Gyr type CQ). Lever bypasses the meter, but the meter may be removed with the bypass open.
- c) Horn bypass (option on residential sockets). Tangs on line and load connectors allow for jumper leads to be fitted over them before the meter is pulled.
- d) Manual bypass (K-4, K-5, K-7) uses separate "links", which are clamped onto special studs before the meter is removed. K-7 also uses a "rotating link" type bypass.
- e) Other types not made by Landis & Gyr include: slide links, screw type, and automatic circuit closers.



## Q & A Product Sheets

**Q. How can I find a missing “lug” for a (Catalog No. \_\_\_\_\_) meter socket?**

- A. If the socket is a residential type, the customer usually needs the nut/screw assembly that clamps the wire into place in a lay-in style connector. There are different types of nut/screws. You will need to determine the catalog number of the device, and if it is to be used on the line side, load side or neutral. With a commercial device, the customer may look for a ground lug or mechanical lug for a stud type meter socket. In these cases the customer should contact a technical support person, or refer to the specification sheet for the correct lug.

The customer may mistake the number, that is stamped on the part, (e.g. “6T0350”) as the catalog number. This is actually the wire size that is stamped into the nut/screw assembly for a HQ style device. “6 TO 350” refers to the wire size range of the connector.

**Q. How can I find a replacement insulator, block, or porcelain/ceramic insulator?**

- A. First, determine the catalog number of the device. After the device has been identified you can then inquire if it is “left hand or right hand”, and if it is used on a side wired device or a multi-position gang socket. On standard residential sockets, the right and left hand blocks are identical, and are mounted in a mirror image of each other.

**Q. What size hub can I use on a RX or HD hub opening?**

- A. A RX style hub opening will accept a 1” to 2-1/2” hub. A HD style hub opening will accept a 3” to 4” hub.

**Q. How can I permanently close the meter opening of my meter socket without a meter in place?**

- A. A round black plastic disk (Catalog No. H39968) is available. It is located between the meter socket block assembly and the meter socket cover. The cover holds the disk into place. This is used on residential and most commercial sockets that have embossed meter openings in the socket cover.

**Q. What do I use to close the meter opening, and also permanently jumper the meter socket so that the end user still gets power, although unmetered?**

- A. For all devices with jaws, use jumper (Catalog No. H36479). Two jumpers are needed for a single phase device and three for a three phase device.

**Q. What if I need an isolated neutral?**

- A. Some applications require the neutral connection to be isolated or insulated. Isolated neutral kits are available for select CQ and HQ (Catalog No. H64685-1) and K-7 devices (Catalog No. H69685-1).

**Q. What if I need a 5th Jaw or 5th Terminal?**

- A. Residential sockets (type UAXXXX) use two different types of field installable 5th terminals. Catalog No. H659-0121 for a grounded 5th terminal is most commonly used. Use Catalog No. H659-0120 when the 5th terminal does not need to be grounded. The 5th terminal for a HQ device (Catalog No. H35815-2) is in the form of a polycarbonate, safety shield with the 5th terminal located in the 9 o’clock position.

**Q. What lugs should I use for a (Catalog No. \_\_\_\_\_) meter socket?**

- A. For commercial devices, mechanical lugs are mounted on either 3/8” or 1/2” studs. The catalog page for each type of device lists the recommended lugs to use. Also, there are two pages of lug information in the back of each catalog. This information shows pictures of lugs, a table describing what size conductors they will handle and what device they are to be used in.



## Q & A Product Sheets

**Q. What is the voltage rating for Landis & Gyr meter sockets?**

A. All meter sockets manufactured by Landis & Gyr are rated for up to 600 volts, with the exception of type K-4, which is rated at 300 volts.

**Q. What material is used for the Landis & Gyr meter socket enclosures?**

A. Landis & Gyr uses type G-90 galvanized steel and aluminum for its enclosures. Pedestals used in Chicago use G-210 steel.

**Q. What type of finish is applied to the enclosures?**

A. Landis & Gyr has a high quality reputation for its gray, baked on polyester powder coat, which is long lasting and withstands salt spray testing. Aluminum enclosures are normally supplied unpainted, but can be supplied with the same polyester coating as used on steel.

**Q. What rating do Landis & Gyr meter socket enclosures carry?**

A. Landis & Gyr enclosures have a NEMA type 3R rating.

**Q. Are Landis & Gyr meter sockets UL listed?**

A. Landis & Gyr offers all of its product lines with the UL listing. On occasion, we supply special devices that are not UL listed, to utilities that do not require the UL label.

**Q. What label information can be found on the inside of the meter socket?**

A. Every Landis & Gyr meter socket has a white information label, approximately 2-1/2" x 4" in size. It is located on the upper left hand inside wall of the enclosure. This label contains the following information: Catalog Number, Socket Type (UAT4, HQ-7U etc.), Number of Terminals (jaws), Continuous/Maximum Amperage, Voltage Rating, Service (single phase or three phase), Short Circuit Withstand Rating, Other UL Information, Included lay-in connector sizes or recommended lugs if stud type, Conduit Hub Kit Options and Accessories, where the device is manufactured and the date it was manufactured.

**Q. How do I find the date code?**

A. The date code is located at the bottom of the interior label.

**Q. What is the difference between the two styles of 320A meter sockets Landis & Gyr provides?**

A. Landis & Gyr was the pioneer of class 320 metering. In the early days of 320A metering, it was believed that heavy-duty connectors and jaw assemblies were necessary to withstand this "high" amperage. Landis & Gyr introduced the HQ-D block, which has heavy copper connectors and 1/2" studs for mounting mechanical lugs. This device was designed to be ultra safe and durable. Recent testing has proven that smaller connectors and 3/8" studs can withstand 320A continuous duty. Landis & Gyr also offers a lighter duty 320A HQ-S block. There are still many utilities that require the heavy-duty HQ-D block, because they feel that it is a safer device.

**Q. What is an anti-inversion clip?**

A. The anti-inversion clip (Catalog No. H59676) is a specially formed wire that is inserted into the upper right hand jaw of a 320A meter socket. The purpose of the clip is to disallow a 200A meter to be inserted into the 320A meter socket. Class 320 meters are built with a narrow blade that will fit into a jaw that has the anti-inversion clip installed. The anti-inversion clip also restricts a class 320 meter from being inserted upside down.



## Q & A Product Sheets

### Q. What type of information can I find in the Landis & Gyr catalog?

- A. Landis & Gyr publishes two types of catalogs. Our general catalog has Product Schedules containing detailed information for each type of product Landis & Gyr manufactures. Product Schedule #400 outlines the complete product offering and guides the user to the correct Product Schedule based on criteria such as: electrical service, form of meter being used, number of terminals (jaws), amperage, etc. Special accessories schedules near the back of the catalog show bypasses, tools, hubs and cover plates, 5th terminal kits, isolated neutral kits and ring-type socket sealing rings.

Landis & Gyr also publishes special catalogs for NEMRA trade territories, based on utility requirements. These catalogs are provided for the Contractor and Industrial (C & I) distribution market by authorized Landis & Gyr manufacturer representative organizations. These catalogs show only the products that pertain to the specific service territory. The C & I catalogs also include special accessories and lug information on the back pages. For detailed product information, customers can be referred to the corresponding Product Schedule in the general catalog.

### Q. What is K-base?

- A. K-base is the term used for a special way of metering continuous amperages of 400A or higher. Before the introduction of K-base metering, which was pioneered by Landis & Gyr, all loads over 320A had to use transformer rated metering. The K-base concept employs a meter with internal transformers to accept loads of up to 600A maximum and a meter-mounting device with heavy-duty bussing that holds the meter in place with the use of bolts. K-base meters and mounting devices are available for single phase, network and three phase applications. The K-base concept is continually growing as new utilities approve its usage each year.



## 135A Meter Mounting Equipment, Residential ①②

4 & 5 Terminal for 1 Phase, 3 Wire

Cont. Amp Rating	Service	Connectors Line	Load	Dimensions (inches)			Hub Opening③	Bypass	Enclosure Material	Catalog Number
135	OH/UG	#14-2/0	#14-2/0	8.0	11.7	3.6	RX Opening	None	Steel	UAT111-0G
135	OH	#14-2/0	#14-2/0	8.0	11.7	3.6	H38597-2 Inst.	None	Steel	UAT111-BG
135	OH/UG	#14-2/0	#14-2/0	8.0	11.7	3.6	RX Opening	Horn	Steel	UAT111-0PQG
135	OH	#14-2/0	#14-2/0	8.0	11.7	3.6	H38597-2 Inst.	Horn	Steel	UAT111-BPQG


① All units include a quad neutral.

② 5th Terminal Kit for field installation: H659-0121.

③ See page 24 for accessories.



UAT111-0G

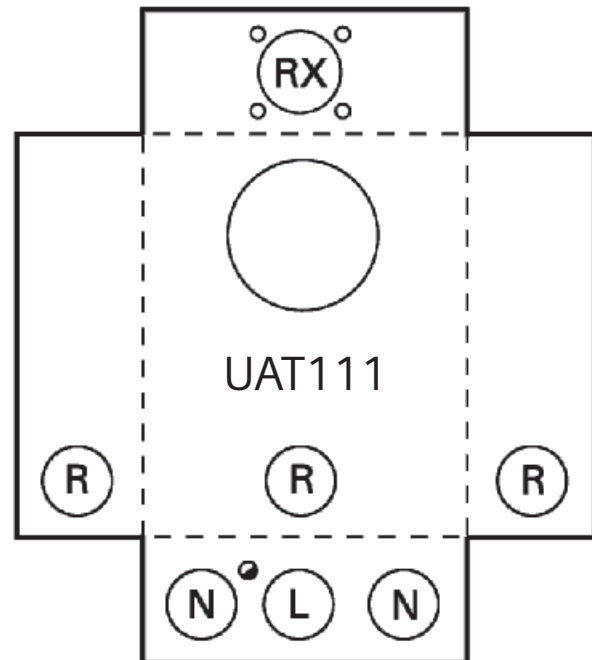

### KNOCKOUTS (inches):

●:	1/4
L:	1/2, 3/4, 1, 1-1/4, 1-1/2
N:	3/4, 1, 1-1/4, 1-1/2, 2
R:	1, 1-1/4, 1-1/2, 2





## 200A Meter Mounting Equipment, Type AT, Residential ①②

### 4 & 5 Terminal for 1 Phase, 3 Wire

Cont. Amp Rating	Service	Connectors Line & Load	Dimensions (inches)			Hub Opening③	Bypass	Enclosure Material	Catalog Number
200	OH	#6-350 KCMIL	8.0	15.0	4.5	H38599-2 Inst.	None	Steel	UAT317-DG
200	OH	#6-350 KCMIL	8.0	15.0	4.5	RX Opening	None	Steel	UAT317-OG
200	OH	#6-350 KCMIL	8.0	15.0	4.5	H38599-2 Inst.	Horn	Steel	UAT317-DPQG
200	OH	#6-350 KCMIL	8.0	15.0	4.5	RX Opening	Horn	Steel	UAT317-OPQG
200	OH/UG	#6-350 KCMIL	11.0	15.0	4.5	RX Opening	None	Steel	UAT417-OG
200	OH/UG	#6-350 KCMIL	11.0	15.0	4.5	Blank Top	None	Steel	UAT417-PG
200	OH/UG	#6-350 KCMIL	11.0	15.0	4.5	RX Cl. Plate	None	Steel	UAT417-XG
200	OH/UG	#6-350 KCMIL	11.0	15.0	4.5	RX Opening	Horn	Steel	UAT417-OPQG
200	OH/UG	#6-350 KCMIL	11.0	15.0	4.5	Blank Top	Horn	Steel	UAT417-PPQG
200	OH/UG	#6-350 KCMIL	11.0	15.0	4.5	RX Cl. Plate	Horn	Steel	UAT417-XPQG
200	OH/UG	Line #6-350 KCMIL Load (2) #6-250 KCMIL	11.0	22.0	4.5	RX Cl. Plate	Horn	Steel	UAT61A-XPB

① All units are supplied with a quad neutral.

② 5th Terminal Kit for field installation: H659-0121.


③ See page 24 for accessories.

### KNOCKOUTS (inches):

●: 1/4  
A: 1/2  
S: 1, 1-1/4, 1-1/2, 2, 2-1/2  
AB: 1/4, 1/2, 7/8






UAT317-OPQG

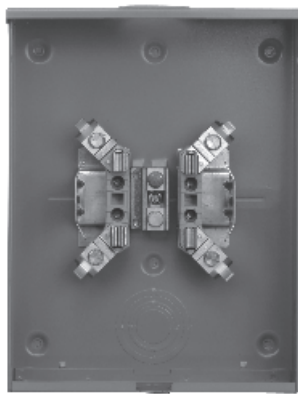

UAT417-OPQG




UAT61A-XPB

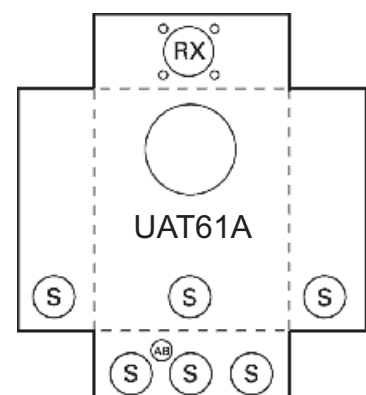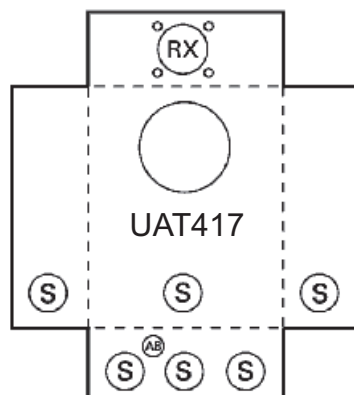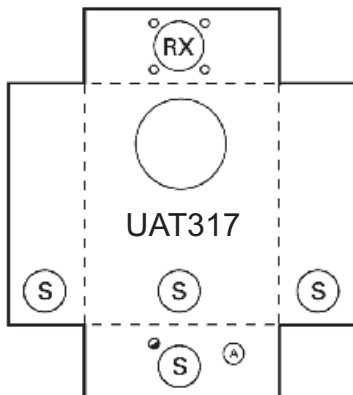

### 4 & 5 Terminal for 1 Phase, 3 Wire

- ① Unit is supplied with 2 ground lugs.
- ② 5th Terminal Kit for field installation: H659-0121.

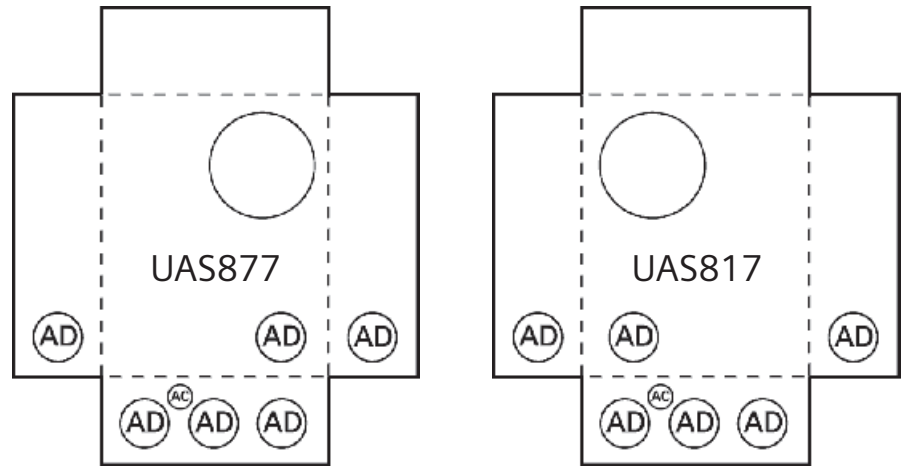

AC: 1/4, 1/2  
AD: 1-1/4, 1-1/2, 2, 2-1/2, 3




## 100A/150A Position Meter Mounting Equipment, Horizontal Gang, Residential ①②③

### 4 & 5 Terminal for 1 Phase, 3 Wire

No. Pos.	Cont. Amp Rating	Overall Ampacity	Connectors Line	Connectors Load	Dimensions (inches)			Hub Opening	Bypass	Catalog Number
					W	H	D			
2	100	100	#6-350 KCMIL	#14-2/0	24.0	12.0	4.5	RX Opening	None	UA2311-0G
2	100	100	#6-350 KCMIL	#14-2/0	24.0	12.0	4.5	RX Opening	Horn	UA2311-0PQG
2	150	150	#6-350 KCMIL	#6-350 KCMIL	24.0	12.0	4.5	RX Opening	None	UA2313-0G
3	100	135	#6-350 KCMIL	#14-2/0	32.0	12.0	4.5	RX Opening	Horn	UA3311-0PQG
3	150	203	#6-350 KCMIL	#6-350 KCMIL	32.0	12.0	4.5	RX Opening	None	UA3313-0G
4	100	180	#6-350 KCMIL	#14-2/0	40.0	12.0	4.5	RX Opening	Horn	UA4311-0PQG
4	150	270	#6-350 KCMIL	#6-350 KCMIL	40.0	12.0	4.5	RX Opening	None	UA4313--0G

① All units are equipped with 2 ground lugs.




② All sockets are suitable for either overhead or underground feed.

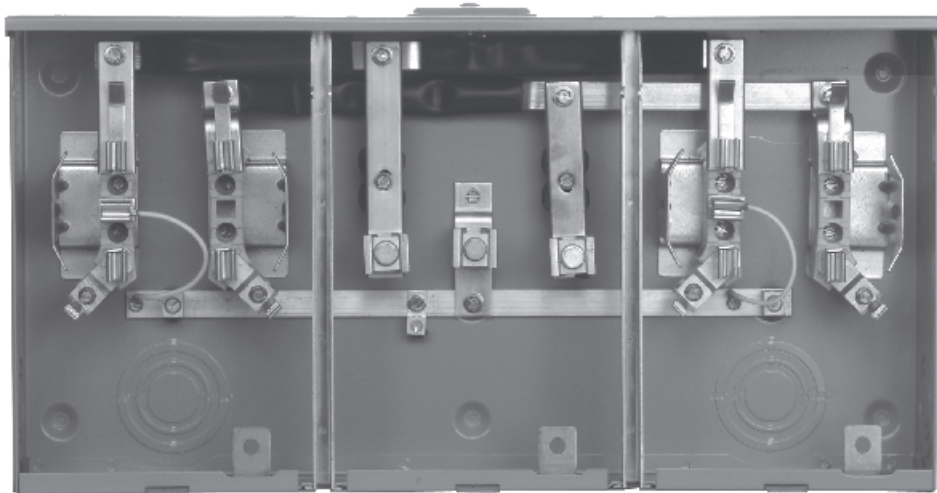

#### KNOCKOUTS (inches):

S: 1, 1-1/4, 1-1/2, 2, 2-1/2  
AC: 1/4, 1/2  
RX: Ø2.750 HUB OP

UA2311-0PQG

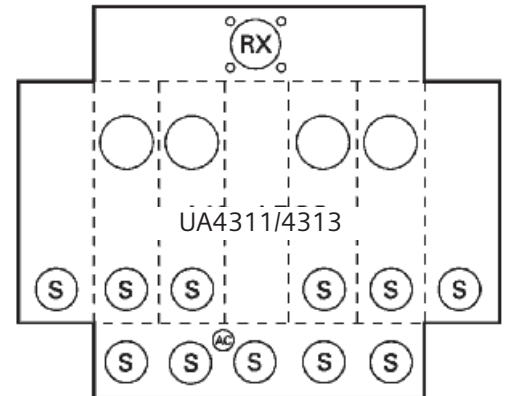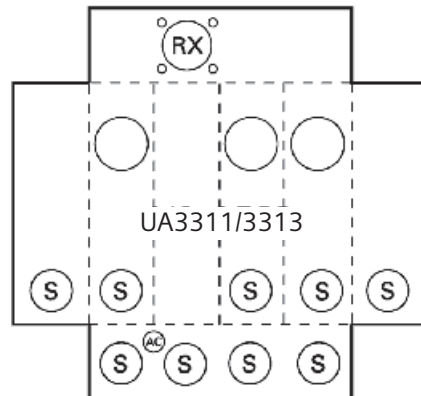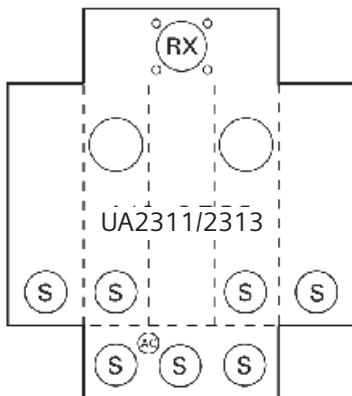




## 200A/Position Meter Mounting Equipment, Horizontal Gang, Residential ①②③

4 & 5 Terminal for 1 Phase, 3 Wire

No. Pos.	Cont. Amps Per Pos.	Connectors Line	Connectors Load	Dimensions (inches)			Hub Opening	Bypass	Catalog Number
				W	H	D			
2	200	#6-350 KCMIL	#6-350 KCMIL	24.0	14.5	5.12	HD Opening	None	UA2717-YG
2	200	#6-350 KCMIL	#6-350 KCMIL	24.0	14.5	5.12	HD Opening	Horn	UA2717-YPQG
3	200	#1/0-600 MCM	#6-350 KCMIL	32.0	14.5	5.12	HD Opening	None	UA3717-YG
3	200	#1/0-600 KCMIL	#6-350 KCMIL	32.0	14.5	5.12	HD Opening	Horn	UA3717-YPQG
4	200	(2) #1/0-600 MCM	#6-350 KCMIL	43.0	14.5	5.12	HD Opening	None	UA4719-YG
4	200	(2) #1/0-600 KCMIL	#6-350 KCMIL	43.0	14.5	5.12	HD Opening	Horn	UA4719-YPQG
5	200	(2) #1/0-600 MCM	#6-350 KCMIL	51.0	14.5	5.12	(2) HD Opening	None	UA5719-KG
5	200	(2) #1/0-600 KCMIL	#6-350 KCMIL	51.0	14.5	5.12	(2) HD Openings	Horn	UA5719-KPQG
6	200	(2) #1/0-600 MCM	#6-350 KCMIL	59.0	14.5	5.12	(2) HD Openings	None	UA6719-KG
6	200	(2) #1/0-600 KCMIL	#6-350 KCMIL	59.0	14.5	5.12	(2) HD Openings	Horn	UA6719-KPQG

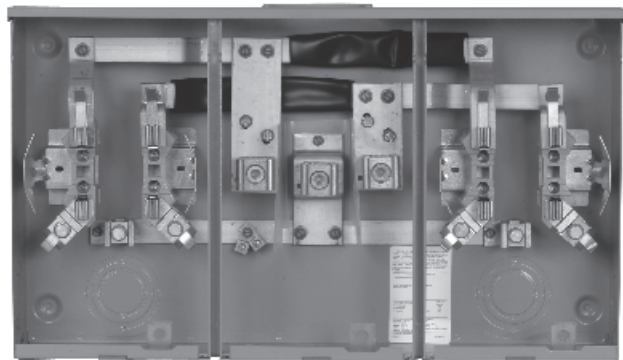


UA2717-YPQG



- ① All units are equipped with 2 ground lugs.
- ② All sockets are suitable for either overhead or underground feed.

### KNOCKOUTS (inches):

X: 1-1/4, 1-1/2, 2, 2-1/2  
AC: 1/4, 1/2  
AD: 1-1/4, 1-1/2, 2, 2-1/2, 3  
HD: Ø4.281 HUB OP  
RX: Ø2.750 HUB OP

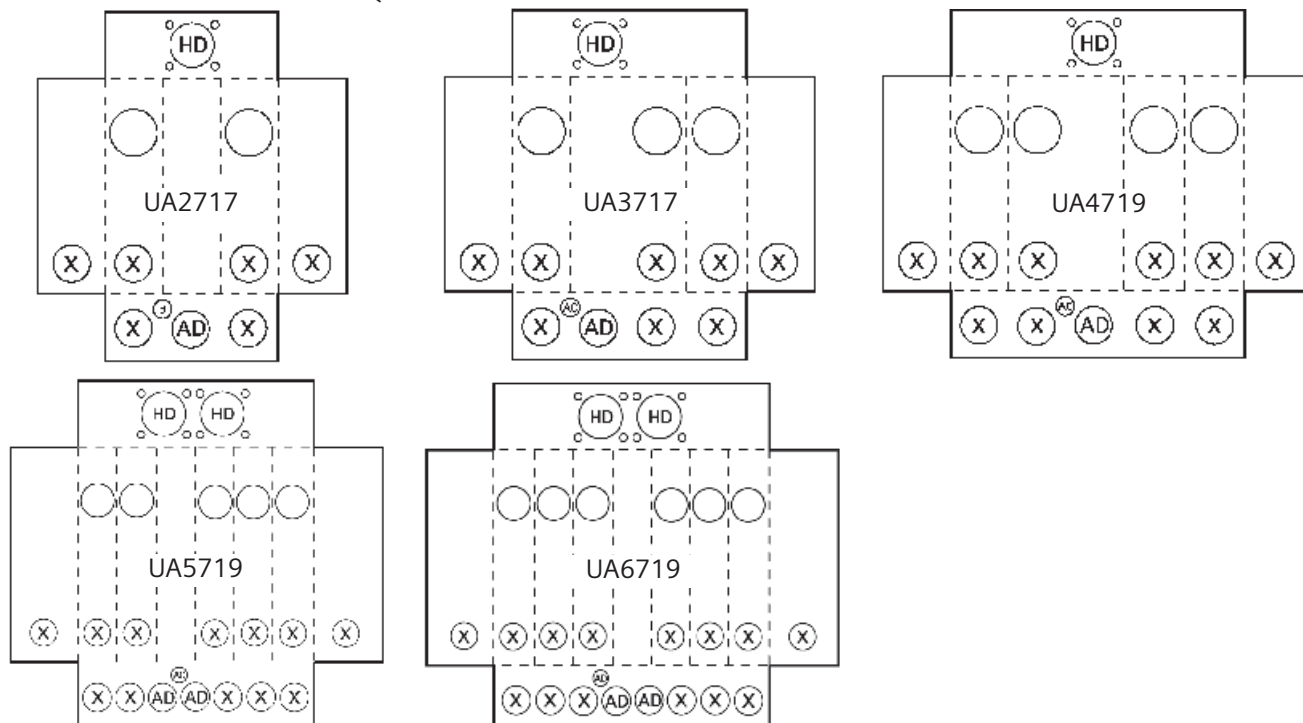







## 200A Multi-Position Lever Bypass Meter Mounting Equipment, Commercial ①②

No. of Pos.	Cont. Amp Rtg.	Overall Amps	Service	Connectors Line	Connectors Load	Dimensions (in.) W H D	Hub Opening	No. of Term.	Bypass ②	Encl. Matl.	Catalog Number
<b>120/240V AC MAX 1 Phase 3 Wire</b>											
2	200	250	OH/UG	1/0-500 KCMIL	#6-350 KCMIL	32.8 23.2 6.0	HD Cover Pl.	4	Lever	Steel	404042-01
2	200	250	OH/UG	1/0-500 KCMIL	#6-350 KCMIL	32.8 23.2 6.0	HD Cover Pl.	5	Lever	Steel	404052-023NU ③
3	200	250	OH/UG	1/0-500 KCMIL	#6-350 KCMIL	43.9 23.2 6.0	HD Cover Pl.	5	Lever	Steel	404053-023NU ③
4	200	300	OH/UG	(2) 1/0-500 KCMIL	#6-350 KCMIL	61.0 23.2 6.0	(2) HD Cvr Pls.	5	Lever	Steel	404054-223NU ③
5	200	300	OH/UG	(2) 1/0-500 KCMIL	#6-350 KCMIL	72.1 23.2 6.0	(2) HD Cvr Pls.	5	Lever	Steel	404055-223NU ③
6	200	410	OH/UG	(2) 1/0-500 KCMIL	#6-350 KCMIL	83.2 23.2 6.0	(2) HD Cvr Pls.	5	Lever	Steel	404056-223NU ③
<b>600V AC MAX 3 Phase 4 Wire</b>											
2	200	410	OH/UG	1/0-500 KCMIL	#6-350 KCMIL	32.8 23.2 6.0	HD Cover Pl.	7	Lever	Steel	404072-023NU
3	200	500	OH/UG	1/0-500 KCMIL	#6-350 KCMIL	43.9 23.2 6.0	HD Cover Pl.	7	Lever	Steel	404073-023NU
4	200	500	OH/UG	(2) 1/0-500 KCMIL	#6-350 KCMIL	61.0 23.2 6.0	(2) HD Cvr. Pls.	7	Lever	Steel	404074-223NU
5	200	620	OH/UG	(2) 1/0-500 KCMIL	#6-350 KCMIL	72.1 23.2 6.0	(2) HD Cvr. Pls.	7	Lever	Steel	404075-223NU
6	200	608	OH/UG	(2) 1/0-500 KCMIL	#6-350 KCMIL	83.2 23.2 6.0	(2) HD Cvr.Pls.	7	Lever	Steel	404076-223NU






① All units are equipped with a ground lug. ② Bypass is clamp jaw, lever operated and is rated for 100% ③ 5th Terminal included at 9:00 position.

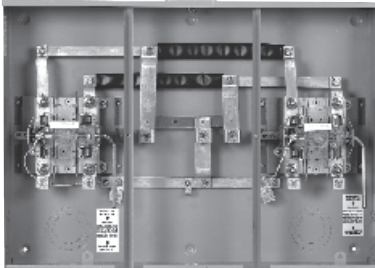

404052-023NU

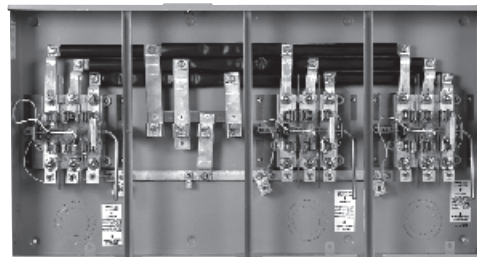

404073-023NU

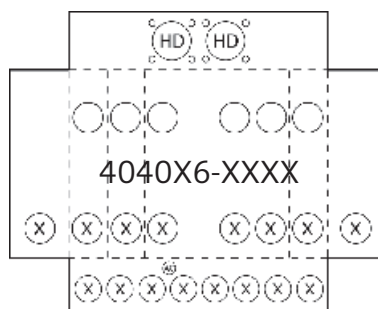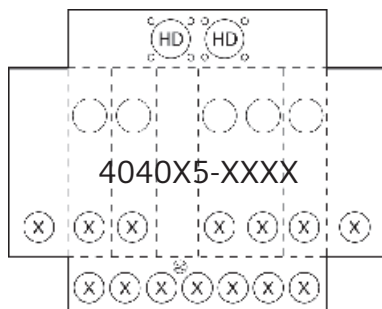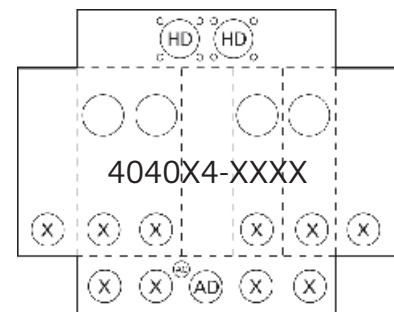

### KNOCKOUTS (inches):

B: 1/2, 3/4  
X: 2, 2-1/2, 3, 3-1/2  
AC: 1/4, 1/2  
HD: Ø4.281 HUB OP



## 200A, Meter Mounting Equipment, Type HQ, Lever Bypass, Commercial/Industrial ①②③


4 Terminal for 1 Phase, 3 Wire • 5 Terminal for 1 or 3 Phase, 3 Wire • 7 Terminal for 3 Phase, 4 Wire

Cont. Amp Rating	Service	Connectors	Dimensions (inches)			Hub Opening	Enclosure Material	Catalog Number
W	H	D						
200	OH	#6-350 KCMIL	10.0	17.0	5.2	RX Opening	Steel	40804-01QG ⑤
200	OH/UG	#6-350 KCMIL	13.0	19.0	5.2	RX Cl. Plate	Steel	40404-02QG ⑤
200	OH/UG	#6-350 KCMIL	13.0	19.0	5.2	RX Cl. Plate	Steel	40404-025
200	OH	#6-350 KCMIL	10.0	17.0	5.2	RX Opening	Steel	40005-01QG ④ ⑤
200	OH	#6-350 KCMIL	10.0	17.0	5.2	RX Opening	Steel	40005-01 ④ ⑤
200	OH/UG	#6-350 KCMIL	13.0	19.0	5.2	RX Cl. Plate	Steel	40405-02QG ④ ⑤
200	OH/UG	#6-350 KCMIL	13.0	19.0	5.2	RX Cl. Plate	Steel	40405-025 ④
200	OH	#6-350 KCMIL	10.0	17.0	5.2	RX Opening	Steel	40007-01QG ⑤
200	OH	#6-350 KCMIL	10.0	17.0	5.2	RX Opening	Steel	40007-01
200	OH/UG	#6-350 KCMIL	13.0	19.0	5.2	RX Cl. Plate	Steel	40407-02QG ⑤
200	OH/UG	#6-350 KCMIL	13.0	19.0	5.2	RX Cl. Plate	Steel	40407-025 ④


- ① All units are UL listed.  
 ② Bypass mechanism is lever-operated, jaw pressure release with 100% bypass capacity.  
 ③ Disconnect sleeves should not be used with these devices.  
 ④ These units are not for use with 3 phase, 4 wire service. For 3 wire service only. 5th terminal is in the 6 o'clock position.  
 ⑤ Sockets with "QG" suffix are supplied with two ground lugs.



40405-025

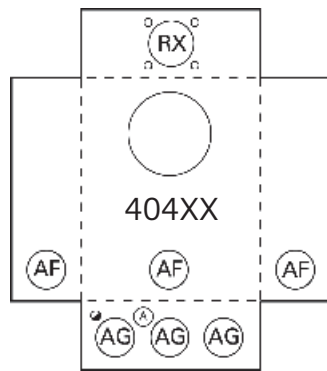

40007-01

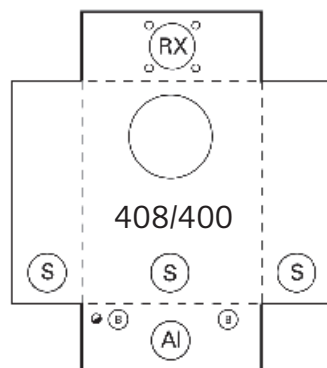

### KNOCKOUTS (inches):

●:	1/4
A:	1/2
B:	1/2, 3/4
S:	1, 1-1/4, 1-1/2, 2, 2-1/2
AF:	1, 1-1/2, 2, 2-1/2, 3
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3
AI:	1, 1-1/4, 1-1/2, 2, 2-1/2, 3
RX:	Ø2.750 HUB OP



## 320A Meter Mounting Equipment, Type HQ, Lever Bypass Residential/Commercial/Industrial ①②③

### 4 Terminal for 1 Phase, 3 Wire

Amp Rating Cont./Max.	Service	Terminal	Connectors	Dimensions (inches)			Hub Opening	Enclosure Material	Catalog Number
				W	H	D			
320/400	OH/UG	4	3/8-24 Stud	13.0	28.0	5.0	HD Cl. Plate	Steel	47604-02QG ④
320/400	OH/UG	4	1/2-20 Stud	14.0	28.0	6.0	HD Cl. Plate	Steel	47704-02
320/400	OH/UG	4	3/8-24 Stud	16.0	31.0	5.0	HD Cl. Plate	Steel	48104-02
320/400	UG	4	3/8-24 Stud	12.8	28.0	5.0	Blank Top	Steel	48504-92

① All units are supplied with ground lugs.

② Bypass mechanism is lever-operated, jaw pressure release with 100% bypass capacity.

③ Disconnect sleeves should not be used with these devices.

④ Sockets with "QG" suffix are supplied with two ground lugs.






48104-02  
(Lugs not included)



48504-92

### KNOCKOUTS (inches):

●:	1/4
A:	1/2
Z:	1-1/2, 2, 2-1/2
EE:	2, 2-1/2, 3
GG:	2-1/2, 3, 3-1/2
HH:	2-1/2, 3, 3-1/2, 4
AC:	1/4, 1/2
AE:	1/4, 1/2, 3/4, 1, 1-1/4
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3

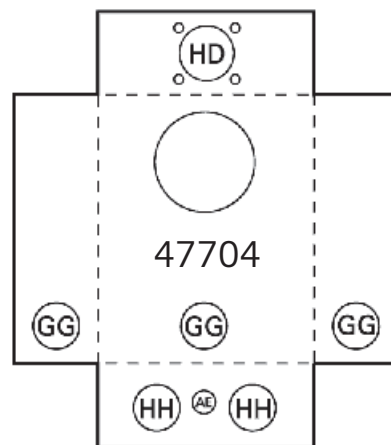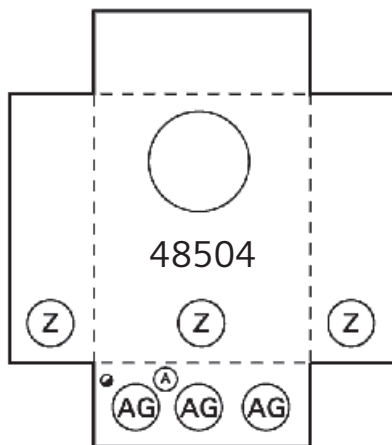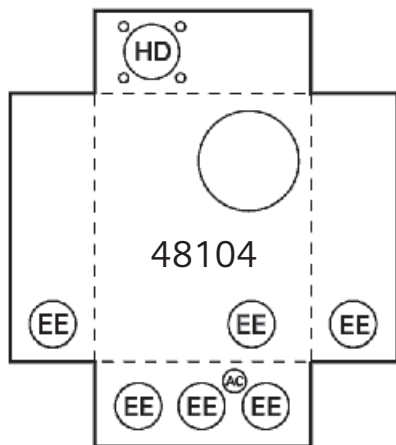



## 320A Meter Mounting Equipment, Type HQ- Heavy Duty, Lever Bypass

Residential/Commercial/Industrial ①②③ 5 Terminal for 3 Phase, 3 Wire • 7 Terminal for 4 Wire, Wye or Delta

Amp Rating Cont./Max.	Service	Terminals	Connectors	Dimensions (inches)			Hub Opening	Enclosure Material	Catalog Number
				W	H	D			
320/400	OH/UG	5	1/2-20 Stud	14.0	28.0	6.0	HD Opening	Steel	47705-01FL ④⑥
320/400	OH/UG	5	1/2-20 Stud	14.0	28.0	6.0	HD Cl. Plate	Steel	47705-02 ④⑥
320/400	OH/UG	7	1/2-20 Stud	14.0	28.0	6.0	HD Opening	Steel	47707-01FL ⑤
320/400	OH/UG	7	1/2-20 Stud	14.0	28.0	6.0	HD Cl. Plate	Steel	47707-02 ⑤⑦
320/400	OH/UG	7	3/8-24 Stud	20.0	34.0	6.0	HD Cl. Plate	Steel	48707-02



- ① All units are supplied with ground lugs.
- ② Bypass mechanism is lever-operated, jaw pressure release with 100% bypass capacity.
- ③ Disconnect sleeves should not be used with this device.
- ④ Recommended lugs for 47705 are 61300.
- ⑤ Recommended lugs for 47707 are 60162. See pages 26-27 for other lug options.
- ⑥ HQ-5D is NOT for use with 3 phase, 4 wire service.
- ⑦ May be used for 200A maximum service at Cinergy.



HQ-5D  
47705-01FL



HQ-7D  
47707-01FL

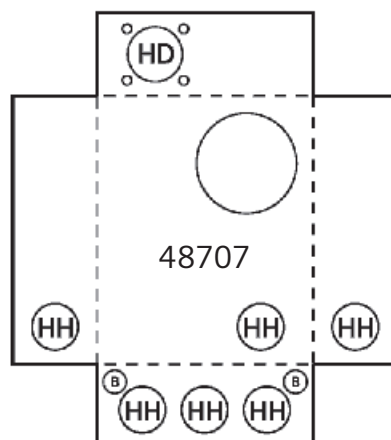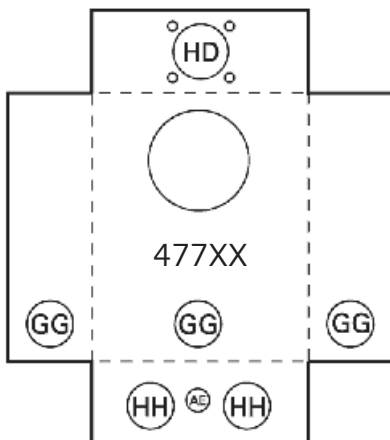

### KNOCKOUTS (inches):

GG:	2-1/2, 3, 3-1/2
HH:	2-1/2, 3, 3-1/2, 4
AE:	1/4, 1/2, 3/4, 1, 1-1/4
HD:	Ø4.281 HUB OP





## 400A Meter Mounting Equipment, Type K4, Residential/Commercial ①②

### 4 Terminal for 1 Phase, 3 Wire

Cont. Amp Rating	Bypass ③	Service	Connectors	Dimensions (inches)			Hub Opening	Enclosure Material	Catalog Number
				W	H	D			
400	56495	OH/UG	1/2-20 Stud	18.0	36.0	6.1	HD Cl. Plate	Steel	9810-8507

① See pages 22-23 for other lug options.


②

Landis & Gyr manual bypass, Catalog Number H56495 available (2 required) normally for utility


### Residential Type K-4




9810-8507




Overhead  
Parallel Conductor  
2 - H58853  
2 - H56425  
1 - H56732




Overhead  
Single Conductor Line  
Parallel Conductor Load  
2 - H58852  
2 - H56425  
1 - H56476  
1 - H56732




Overhead  
Single Conductor  
4 - H58852  
2 - H56476




Underground  
Parallel Conductor  
2 - H58853  
2 - H56732  
1 - H56426



Underground  
Single Conductor Line  
Parallel Conductor Load  
2 - H58852  
2 - H56425  
1 - H56476  
1 - H56732



Underground  
4 - H58852  
2 - H56476

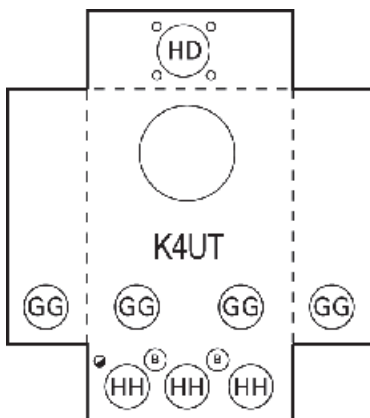

### KNOCKOUTS (inches):

B:	1/2, 3/4
GG:	2-1/2, 3, 3-1/2
HH:	2-1/2, 3, 3-1/2, 4
AE:	1/4, 1/2, 3/4, 1, 1-1/4
HD:	Ø4.281 HUB OP



## 400/400 & 480/600A Meter Mounting Equipment, Type K-7 T , Residential/Commercial/Industrial

5 or 7 Terminal for 3 Phase, 3 or 4 Wire, Wye or Delta

Cont. Amp Rating	Service	Connectors	Dimensions (in.)			Hub Opening	Enclosure Material	Bypass ①	Catalog Number
W	H	D							
400/400	OH/UG	1/2-20 Stud	20.0	43.0	6.0	HD Cl. Plate	Steel	H58888	9817-8532 ②
480/600	OH/UG	1/2-20 Stud	20.0	43.0	6.0	(2) HD Cl. Plates	Steel	H58888	9817-9404 ②③
480/600	OH/UG	1/2-20 Stud	20.0	43.0	6.0	(2) HD Cl. Plates	Steel	H58888	9817-9504 ②④


① All units require manual bypass H58888, normally for utility use only (3 required).

② Ground lug 56734 included with these devices.


③ K-5 devices are to be used with 3 wire grounded services only.

④ Note: K-7 can be substituted for K-5 with center phase not wired.


### Residential Type K-7

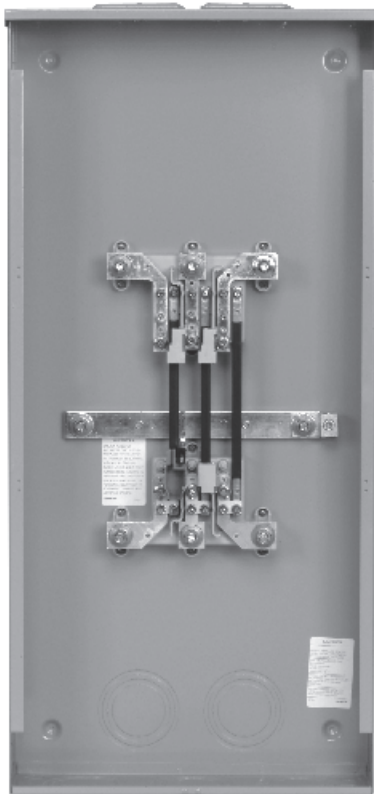


9817-9504




Overhead  
Single Conductor  
8 - H56476




Overhead  
Single and Triple Load Feed  
4 - H56476  
4 - H68752-1




Overhead  
Parallel Conductor  
8 - H56732





Underground  
Single Conductor  
3 - H58852  
5 - H56476



Underground  
Single Conductor Line  
Triple Conductor Load  
3 - H58852  
1 - H56476  
4 - H68752-1



Underground  
Parallel Conductor  
3 - H58853  
5 - H56732

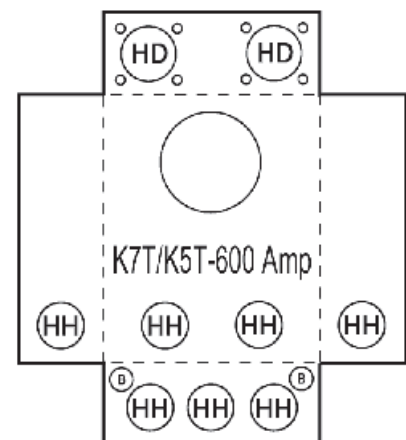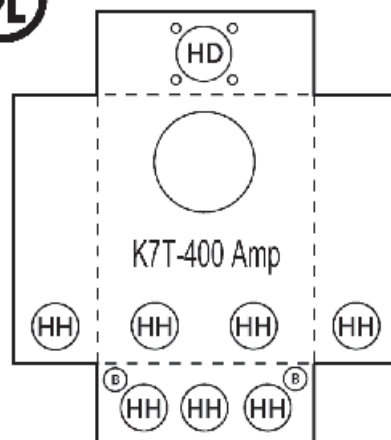

### KNOCKOUTS (inches):

B: 1/2, 3/4  
HH: 2-1/2, 3, 3-1/2, 4  
HD: Ø4.281 HUB OP



## 100A/200A Meter Mounting Equipment, Meter Main, Residential ①

### 4 & 5 Terminal for 1 Phase, 3 Wire

Rating	Service	Line	Connectors Load	Dimensions (in.) W H D	Hub Opening	Main Breaker	No. Term. Bypass	Cover Style	Catalog Number
125	OH/UG	#6-250 KCMIL	#2-1/0 CU, 2/0 AL	18.5 17.0 5.1	RX Cl. Plate	125A inst.	5	Horn	Ringless LGMM0202B1125RJBX ②⑤
150	OH/UG	#6-250 KCMIL	#1-300 KCMIL	18.5 17.0 5.1	RX Cl. Plate	150A inst.	5	Horn	Ringless LGMM0202B1150RJBX ②⑤
200	OH/UG	#6-250 KCMIL	#1-300 KCMIL	18.5 17.0 5.1	RX Cl. Plate	200A inst.	5	Horn	Ringless LGMM0202B1200RJBX ②⑤
100	OH	#14-2/0	#6-350 KCMIL	8.0 28.5 4.5	RX Opening	125A Prov.	4	Horn	Ringless UAB111-0PCH ③④
200	OH	#6-350 KCMIL	see breaker rating	8.0 28.5 4.5	RX Opening	200A inst.	4	Horn	Ringless UAB317-0PCH ③⑤
200	OH/UG	#6-350 KCMIL	see breaker rating	11.6 28.0 5.2	RX Cl. Plate	150-200A Prov.	4	None	Ringless UAB417-XPG
200	UG-SW	#6-350 KCMIL	see breaker rating	13.1 25.1 5.2	Blank Top	150-200A Prov.	4	None	Ringless UAB877-PG
150	OH/UG	#6-250 KCMIL	#1-300 KCMIL	16.0 17.0 5.1	RX Cl. Plate	150A inst.	4	None	Ring LGMM0202B1150
200	OH/UG	#6-250 KCMIL	#1-300 KCMIL	16.0 17.0 5.1	RX Cl. Plate	200A inst.	4	None	Ring LGMM0202B1200

① All units are UL listed.

② 5th terminal factory installed

③ 5th terminal for field installation: H659-0121.

④ UAB111-0PCH has a provision for a 125 amp max. circuit breaker.  
See breaker table for details.

⑤ Breaker factory installed.


See breaker table for replacement circuit breakers.

### Breaker Table


Amps	Circuit Breaker
100	Q2100
125	Q2125
150	QN2150
200	QN2200
UAB317	
200	QJ22B200

### KNOCKOUTS (inches):


- : 5/16 on UAB4,  
5/16, 1/2 on UAB8
- : 1/4
- A: 1/2
- C: 1/2, 3/4, 1
- S: 1, 1-1/4, 1-1/2, 2, 2-1/2
- Z: 1-1/2, 2, 2-1/2
- DD: 1-1/4, 1-1/2, 2, 2-1/2, 3

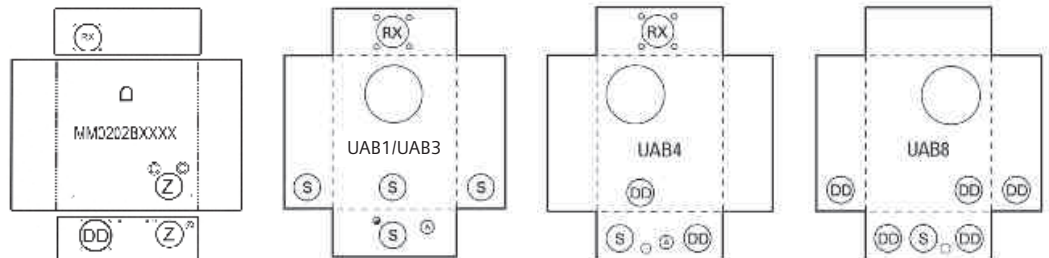

UAB317-0PCH

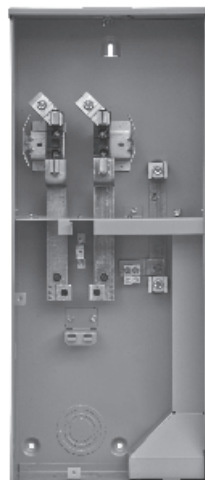

UAB417-XPG

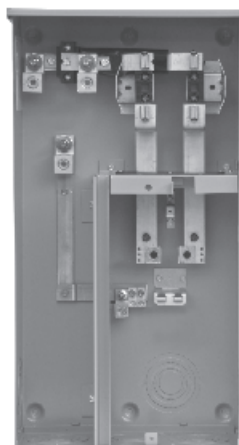

UAB877-PG



LGMM0202B1200



## Air Conditioning Disconnects and Enclosed Receptacles

Fused® and Non-Fused

### Features

#### Flexibility

- 30-60 amperes
- 240 volts A.C.
- Padlock provisions
- Horsepower rated
- 10,000 A.I.C.
- New models available with internal GFCI receptacle
- Removable Door
- Ample Wiring Space

#### Rugged Durability

- Noryl® thermoplastic and powder coated G90 steel enclosure is corrosion resistant and extremely durable giving long maintenance free service
- Copper conductors
- Raised mounting embosses



#### Steel AC Disconnects

Ampere Rating	Disconnect Type	Catalog No.	Horse Power Rating	Dimensions (inches)		
				H	W	D
30	Fused Pullout	LF2030	3	7.3	5.0	2.1
60	Fused Pullout	LF2060	10	8.0	5.0	2.1
60	Non-Fused Pullout	LN2060	10	7.3	5.0	2.1
60	Non-Automatic Switch	LNAS2060	10	7.3	5.0	2.1

#### Plastic AC Disconnects

Ampere Rating	Disconnect Type	Catalog No.	Horse Power Rating	Dimensions (inches)		
				H	W	D
30	Fused Pullout	LF2030PL	3	8.0	5.3	3.1
60	Fused Pullout	LF2060PL	10	8.0	5.3	3.1
60	Non-Fused Pullout	LN2060PL	10	7.3	5.0	2.1
60	Non-Fused Pullout	LN2060PLX	10	8.0	6.0	5.8

#### Steel AC Disconnects with 15 Amp GFCI Receptacle

Ampere Rating	Disconnect Type	Catalog No.	Horse Power Rating	Dimensions (inches)		
				H	W	D
30	Fused Pullout	LF2030GFCI	3	9.0	6.1	5.1
60	Fused Pullout	LF2060GFCI	10	9.0	6.1	5.1
60	Non-Fused Pullout	LN2060GFCI	10	7.1	5.8	5.1
60	Non-Automatic Switch	LNAS2060GFCI	10	7.1	5.8	5.1

#### Enclosed Receptacles

Ampere Rating	Disconnect Type	Catalog No.	Receptacle Type	Dimensions (inches)		
				H	W	D
60	N/A	LGP1S	14-50R	7.1	5.8	5.2
30	N/A	LGP3S	TT30R	7.1	5.8	5.2

#### Wire Range Table

Connector	Copper		Aluminum	
	Solid	Stranded	Solid	Stranded
Line	#14-8	#14-3	#12-8	#12-3
Load	#14-8	#14-3	#12-8	#12-3
Neutral	#12-8	#12-2	#12-8	#12-2
Equip. Grnd.	#12-8	#12-2	#12-8	#12-2






## Spa Panel

*For use as Spa/Hot Tub service disconnect*

2-Pole GFCI Breaker	Dimensions (inches)			Catalog Number
	H	W	D	
50A	12.3	6.0	4.5	<b>LGSPA50</b>
60A	12.3	6.0	4.5	<b>LGSPA60</b>



Dead Front

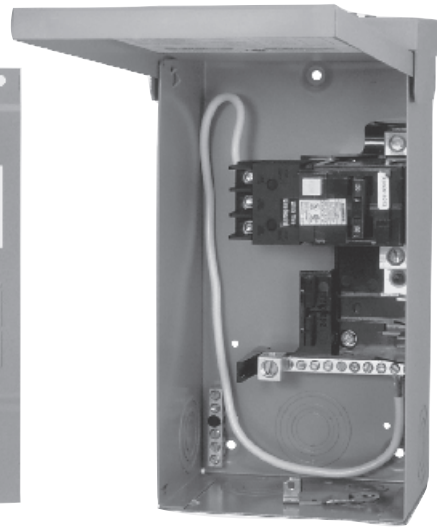


Enclosure



Hub Cover Plate  
included

## Features and Benefits

- UL Listed
- Factory installed, 2-pole 50A GFCI breaker for 240V ground fault protection
- NEMA Type 3R outdoor enclosure
- 2 extra spaces (4 circuits maximum) for additional circuit breakers
- 125 Amp rated interior
- Factory installed 5 position ground bar
- Closure plate included
- Compact enclosure size
- Convenient standard package of 1
- Uses reliable Siemens circuit breakers

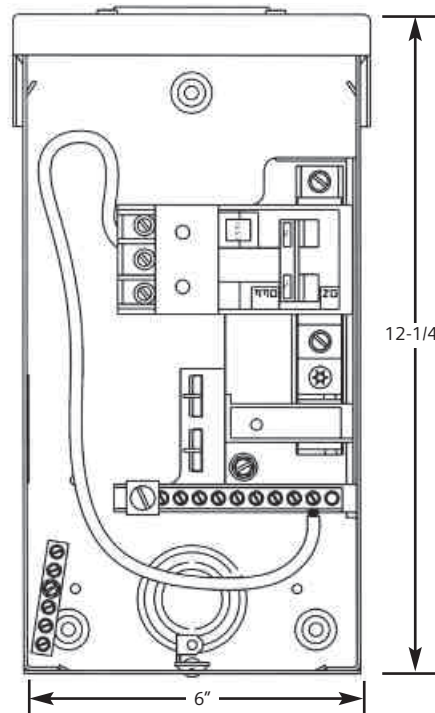



## Connector Lugs

 <p><b>H55890</b> #6-350 KCMIL</p> <p><b>3/8"</b> <b>Stud</b></p>	 <p><b>H55890-1</b> #6-350 KCMIL</p> <p><b>3/8"</b> <b>Stud</b></p>	 <p><b>H56734</b> #6-250 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>	 <p><b>H37892</b> #4-500 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>
 <p><b>H57606-K</b> #6-350 KCMIL</p> <p><b>3/8"</b> <b>Stud</b></p>	 <p><b>H56476</b> #3/0-800 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>	 <p><b>H60162</b> (1) #4-600 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>	 <p><b>H61300</b> (2) 1/0-250 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>
 <p><b>H58022</b> (2) #6-250 KCMIL</p> <p><b>3/8"</b> <b>Stud</b></p>	 <p><b>H56732</b> (2) #4-350 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>	 <p><b>H56732-1</b> (2) #4-350 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>	 <p><b>H56732-2</b> (2) #4-350 KCMIL</p> <p><b>3/8"</b> <b>Stud</b></p>
 <p><b>H56732-M</b> (2) #4-500 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>	 <p><b>H68752-1</b> (3) #6-250 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>	 <p><b>H56426</b> (4) #6-350 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>	 <p><b>H56477</b> 3/0-800 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>
 <p><b>H56425</b> (2) #6-350 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>	 <p><b>H56425-M</b> (2) #4-500 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>	 <p><b>H58852</b> 3/0-800 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>	 <p><b>H56733</b> 3/0-800 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>
 <p><b>H56427</b> (2) #6-350 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>	 <p><b>H56427-M</b> (2) #4-500 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>	 <p><b>H58853</b> (2) #6-350 KCMIL</p> <p><b>1/2"</b> <b>Stud</b></p>	 <p><b>H59299-1</b></p> <p><b>1/2"</b> <b>Stud</b></p>



## Connector Lugs Lug Extender

Pressure type lugs for Landis & Gyr's stud type meter mounting devices are made of 6061-T6 aluminum to provide high strength and high conductivity. All lugs are tin-plated to ensure low contact resistance and to reduce corrosion.


Allen or hex head pressure screws are furnished to provide excellent conductor spread for maximum binding action with the lug. All Landis & Gyr lugs are listed with Underwriters Laboratories.

### Pressure Lug Connectors For Meter Mounting Devices

Device Type	Anti-Rotation Feature	Conductor Size	Stud Opening	Pressure Screw Head	Dimensions* (inches)			Landis & Gyr Catalog Number
					L	W	H	
HQ-4S	No	#6-350 MCM	13/32"	9/16" Hex	2-1/4	1-1/8	1-1/4	H55890
HQ-5 S	No	#6-350 MCM	13/32"	5/16" Allen	2-1/4	1-1/8	1-1/4	H55890-1
HQ-7S	No	#6-350 MCM	13/32"	3/8" Allen	2-1/4	1-1/8	1-1/4	H57606-K
HQ-4D	No	(2) #6-250 MCM	13/32"	5/16" Allen	2-3/16	1-5/8	1-3/16	H58022
HQ-5DM	Yes	#4-500 MCM	9/16"	3/8" Allen	2-13/16	1-1/2	1-9/16	H37892
HQ-7D		(1) #4-600 MCM	9/16"	1/2" Allen	2-13/16	1-3/8	1-13/16	H60162
HQ-7DF	No	or (2) #1/0-250 MCM	9/16"	1/2" Allen	2-13/16	1-3/8	1-13/16	H61300
K-4,5,7	No	(2) #6-350 MCM	9/16"	5/16" Allen	2-7/8	1-57/64	1-1/4	H56425
K-4,5,7	No	(2) #4-500 MCM	9/16"	3/8" Allen	2-13/16	2-1/16	1-9/16	H56425-M
K-4	No	(4) #6-350 MCM	9/16"	5/16" Allen	2-7/8	3-15/16	1-1/4	H56426
K-4,5,7	Yes	(2) #6-350 MCM	9/16"	5/16" Allen	4-15/16	1-1/8	2-1/16	H56427
K-4,5,7	Yes	(2) #2-500 MCM	9/16"	3/8" Allen	4-1/4	1-1/8	1-13/16	H56427-M
K-5,7	Yes	#3/0-800 MCM	9/16"	1/2" Allen	3-1/4	1-5/16	1-13/16	H56476
K-4,5,7	Yes	#3/0-800 MCM	9/16"	1/2" Allen	3-1/4	1-5/16	1-13/16	H56477
K-5,7	No	(2) #4-500 MCM	9/16"	3/8" Allen	2-13/16	2-5/32	1-9/16	H56490
K-5,7	Yes	(2) #4-350 MCM	9/16"	5/16" Allen	2-7/8	1-59/64	1-1/4	H56732
K-5,7	No	(2) #4-350 MCM	9/16"	5/16" Allen	2-7/8	1-59/64	1-1/4	H56732-1
K-5,7	Yes	(2) #4-500 MCM	9/16"	3/8" Allen	2-13/16	2-5/32	1-13/16	H56732-M
K-4,5,7	Yes	#3/0-800 MCM	9/16"	1/2" Allen	4-3/16	1-3/4	2-3/8	H56733
K-4,5,7 (Grd.)	No	#6-250 MCM	9/16"	5/16" Allen	2-9/16	1-9/32	1-3/16	H56734
K-4,5,7	Yes	#3/0-800 MCM	9/16"	1/2" Allen	3-15/16	1-3/4	1-13/16	H58852
K-4,5,7	Yes	(2) #6-350 MCM	9/16"	5/16" Allen	3-15/16	1-1/8	1-1/2	H58853
K-4,5,7	Yes	(3) #6-250 MCM	9/16"	5/16" Allen	2-7/8	2-31/64	1-7/16	H68752-1
K-4 extender	Yes	1/2-20 x 1-7/8" Stud	9/16"	None	4-1/4	1-1/4	2-3/8	H59299-1

### Lug Extender

Device Type	Stud Opening	Stud Size	Dimensions (inches)			Landis & Gyr Catalog Number
			W	H	D	
K-4	9/16"	1/2-20 x 1-7/8"	4-1/4	1-1/4	2-3/8	H59299-1**





\* Dimensions do not include height of pressure screw with conductor installed.

\*\* Includes nut and washer assembly and washer.






## Accessories





### Removable Hub Kits





	Conduit Size (inches)	Catalog Number
 Removable Hub	<b>RX Type Hubs Small</b>	
	1	H38596-2
	1-1/4	H38597-2
	1-1/2	H38598-2
	2	H38599-2
	2-1/2	H38600-2
 Cover Plate	<b>HD Type Hubs Large</b>	
	3	H56856-2
	3-1/2	H56857-2
	4	H56858-2
	Cover Plate - Steel	H56933
	Cover Plate - Aluminum	H56933-1

### Sealing Rings

	Description	Catalog Number
	Stainless Steel Snap Type	H54602
	Stainless Steel Screw Type *Requires 9738-8003 Locking Clip	9738-8001*
	Stainless Steel Screw Type	H9738-8002

## Accessories

	Description	Catalog Number
	Insulated 5th Terminal Kit - Type AS, AT only	H659-0120
	Grounded 5th Terminal Kit - Type AS, AT only	H659-0121
	HQ 5th Terminal Kit - w/lead	H35815-3
	HQ 5th Terminal Kit - 9:00	H35815-2
	Large to Small Adaptor - Steel	H9747-1113
	Large to Small Adaptor - Aluminum	H9747-1112

	Description	Catalog Number
	HQ Isolated Neutral Kit *Includes Neutral and Isolation Block	H64685-1*
	Neutral Isolation Kit for HQ *Isolates Existing Neutral	H64690-1*
	Black Plastic Meter Opening Cover	H39968
	Clear Plastic Meter Opening Cover	H659-0162
	Opening Cover (with plug-in feet)	
	Insulated Jumper * For up to 200A sockets only.	H36479*



## Repair Parts Terms Of Sale

### Repair Parts

Catalog Number	Block Assembly	Neutral Assembly	Connector Screw Assembly	Neutral Screw Assembly
UAT111-BG	5005800H	5007423	1012013 (Screw Only)	1012013 (Screw Only)
UAT111-OG	5005800H	5007423	1012013 (Screw Only)	1012013 (Screw Only)
UAT111-0PQG	5005800HBP	5007424	200007-1 (Screw Only)	200009-1 (Screw Only)
UAT111-BPQG	5005800HBP	5007424	200007-1 (Screw Only)	200009-1 (Screw Only)
UAT317-DG	5015830-2	5007593-2	200007-1 (Screw Only)	200009-1 (Screw Only)
UAT317-OG	5015830-2	5007593-2	200007-1 (Screw Only)	200009-1 (Screw Only)
UAT417-OG	5015830-2	5007593-2	200007-1 (Screw Only)	200009-1 (Screw Only)
UAT417-PG	5015830-2	5007593-2	200007-1 (Screw Only)	200009-1 (Screw Only)
UAT417-XG	5015830-2	5007593-2	200007-1 (Screw Only)	200009-1 (Screw Only)
UAT317-0PQG	5015830B-2	5007593-2	200007-1 (Screw Only)	200009-1 (Screw Only)
UAT317-DPQG	5015830B-2	5007593-2	200007-1 (Screw Only)	200009-1 (Screw Only)
UAT417-0PQG	5015830B-2	5007593-2	200007-1 (Screw Only)	200009-1 (Screw Only)
UAT417-PPQG	5015830B-2	5007593-2	200007-1 (Screw Only)	200009-1 (Screw Only)
UAT417-XPQG	5015830B-2	5007593-2	200007-1 (Screw Only)	200009-1 (Screw Only)
All 200A Gang Sockets	-	-	(Load Side Only) 200008-1	200009-1

**Transportation Charges:** Prices listed are F.O.B. factory with freight prepaid and allowed on all shipments of orders of \$1,000 net or more for single shipments to one location.

**Minimum Billing:** \$400 net plus transportation charges.

**Cancellation:** Orders accepted by the factory can be cancelled only with the factory's consent and upon payment to the seller of reasonable charges incurred by the seller which will indemnify the seller against loss.

**Returns:** Goods may not be returned to Landis & Gyr without written authorization from the factory. A minimum 20% restocking charge will be applicable on all returned goods. Credit will be given only for current production items in unopened cartons. All transportation charges paid by Landis & Gyr will be deducted from such credit.

**Terms:** Standard/Stock Products:






2% 10th net 25th for invoices dated the 1st through the 15th of the month.

2% 25th net 10th for invoices dated the 16th through the 31st of the month.





## Meter Mounting Device Applications

Electrical Service	Service Type	Meter Form	Socket Type	Standard Socket Catalog Number
<b>1-Phase</b> 	Self-contained, 3 wire	2S	4 jaw 100A	UAT111
		2S	4 jaw 200A	UAT317, UAT417, HQ-4
		2SE	4 jaw 320A	HQ-4ST, HQ-4D
	Self-contained, bolt-in	2K	K-4 400/480A	K-4, K-4UT
	Transformer-rated, 2 wire	3S	6 jaw 20A	HQ-6T, HQ-6TS, PTS-6
	Transformer-rated, 3 wire	4S	6 jaw 20A	HQ-6T, HQ-6TS
<b>3-Phase 3-Wire</b> 	Self-contained	12S	5 jaw 100A	HQ-5
		12S	5 jaw 200A	HQ-5
		12SE	5 jaw 320A	HQ-5ST, HQ-5D
	Self-contained, bolt-in	12K	K-5 480/600A	K-5
	Transformer-rated	5S	8 jaw 20A	HQ-8T, HQ-8TS, PTS-8
<b>3-Phase 4-Wire</b>  Wye  or Delta 	Self-contained	14S	7 jaw 100/200/320A	CQ-7, HQ-7
		15S		
	Self-contained, bolt-in	14K	K-7 480/600A	K-7, K-7T
		15K		
		16K		
	Transformer-rated	6S	13 jaw 20A	HQ-13T, HQ-13TS, PTS-13
		8S		
		9S		



### Notes:

[illegible]



### Notes:

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

