## Data sheet



Figure similar

Electrically held lighting contactor, (convertible to mech. held), Amp rating 30A (tungsten 20A), 3 N.C. / 2 N.O. poles, 115-120V 60Hz/110V 50Hz coil, Non-combination type, Enclosure NEMA type 12, Dust/drip proof for indoors

Product brand name	Class LC
Design of the product	Electrically held lighting contactor (convertible to mechanically held)
Special product feature	Electrically held convertible to mechanically held; Power poles convertible between NO and NC

General technical data	
Weight [lb]	19 lb
Height x Width x Depth [in]	16 × 13 × 6 in
Protection against electrical shock	NA for enclosed products
Installation altitude [ft] at height above sea level maximum	6560 ft
Ambient temperature [°F]	
during storage	-22 +149 °F
<ul><li>during operation</li></ul>	-13 +104 °F
Ambient temperature	
<ul><li>during storage</li></ul>	-30 +65 °C
<ul><li>during operation</li></ul>	-25 +40 °C
Country of origin	USA

Size of contactor  Number of NO contacts for main contacts  2  Number of NC contacts for main contacts  3  Operating voltage for main current circuit at AC at 60 Hz maximum  Mechanical service life (switching cycles) of the main contacts typical  Contact rating of the main contacts of lighting contactor  • at tungsten (1 pole per 1 phase) rated value  • at tungsten (2 poles per 1 phase) rated value  • at tungsten (3 poles per 3 phases) rated value  • at ballast (1 pole per 1 phase) rated value  • at ballast (2 poles per 1 phase) rated value  • at ballast (3 poles per 3 phases) rated value  • at resistive load (1 pole per 1 phase) rated  value  • at resistive load (2 poles per 1 phase) rated  value  • at resistive load (3 poles per 3 phases) rated  value  • at resistive load (3 poles per 3 phases) rated  value  • at resistive load (3 poles per 3 phases) rated  value	
Number of NC contacts for main contacts  Operating voltage for main current circuit at AC at 60 Hz maximum  Mechanical service life (switching cycles) of the main contacts typical  Contact rating of the main contacts of lighting contactor  • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at resistive load (1 pole per 1 phase) rated • at resistive load (2 poles per 1 phase) rated value • at resistive load (3 poles per 3 phases) rated • at resistive load (3 poles per 3 phases) rated value • at resistive load (3 poles per 3 phases) rated  • at resistive load (3 poles per 3 phases) rated value • at resistive load (3 poles per 3 phases) rated  30A @600V 3p 3ph	
Operating voltage for main current circuit at AC at 60 Hz maximum  Mechanical service life (switching cycles) of the main contacts typical  Contact rating of the main contacts of lighting contactor  • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value • at resistive load (2 poles per 1 phase) rated value • at resistive load (3 poles per 3 phases) rated • at resistive load (3 poles per 3 phases) rated value • at resistive load (3 poles per 3 phases) rated • at resistive load (3 poles per 3 phases) rated value • at resistive load (3 poles per 3 phases) rated  30A @600V 3p 3ph	
Mechanical service life (switching cycles) of the main contacts typical  Contact rating of the main contacts of lighting contactor  • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value • at resistive load (2 poles per 1 phase) rated value • at resistive load (3 poles per 3 phases) rated • at resistive load (3 poles per 3 phases) rated value • at resistive load (3 poles per 3 phases) rated  • at resistive load (3 poles per 3 phases) rated  • at resistive load (3 poles per 3 phases) rated  • 30A @600V 3p 3ph	
Contact rating of the main contacts of lighting contactor  • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated • at resistive load (2 poles per 1 phase) rated  • at resistive load (3 poles per 3 phases) rated  • at resistive load (3 poles per 3 phases) rated  • at resistive load (3 poles per 3 phases) rated  • at resistive load (3 poles per 3 phases) rated  • at resistive load (3 poles per 3 phases) rated  • at resistive load (3 poles per 3 phases) rated  • at resistive load (3 poles per 3 phases) rated  • at resistive load (3 poles per 3 phases) rated  • at resistive load (3 poles per 3 phases) rated  • at resistive load (3 poles per 3 phases) rated	
<ul> <li>at tungsten (1 pole per 1 phase) rated value</li> <li>at tungsten (2 poles per 1 phase) rated value</li> <li>at tungsten (3 poles per 3 phases) rated value</li> <li>at tungsten (3 poles per 3 phases) rated value</li> <li>at ballast (1 pole per 1 phase) rated value</li> <li>at ballast (2 poles per 1 phase) rated value</li> <li>at ballast (3 poles per 3 phases) rated value</li> <li>at resistive load (1 pole per 1 phase) rated</li> <li>at resistive load (2 poles per 1 phase) rated</li> <li>at resistive load (2 poles per 1 phase) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> </ul>	
<ul> <li>at tungsten (2 poles per 1 phase) rated value</li> <li>at tungsten (3 poles per 3 phases) rated value</li> <li>at ballast (1 pole per 1 phase) rated value</li> <li>at ballast (2 poles per 1 phase) rated value</li> <li>at ballast (2 poles per 1 phase) rated value</li> <li>at ballast (3 poles per 3 phases) rated value</li> <li>at resistive load (1 pole per 1 phase) rated</li> <li>at resistive load (2 poles per 1 phase) rated</li> <li>at resistive load (2 poles per 1 phase) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> </ul>	
<ul> <li>at tungsten (3 poles per 3 phases) rated value</li> <li>at ballast (1 pole per 1 phase) rated value</li> <li>at ballast (2 poles per 1 phase) rated value</li> <li>at ballast (3 poles per 3 phases) rated value</li> <li>at resistive load (1 pole per 1 phase) rated</li> <li>at resistive load (2 poles per 1 phase) rated</li> <li>at resistive load (2 poles per 1 phase) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>30A @600V 2p 1ph</li> <li>30A @600V 2p 1ph</li> <li>30A @600V 2p 1ph</li> <li>30A @600V 2p 1ph</li> <li>30A @600V 3p 3ph</li> <li>30A @600V 3p 3ph</li> <li>30A @600V 3p 3ph</li> </ul>	
<ul> <li>at ballast (1 pole per 1 phase) rated value</li> <li>at ballast (2 poles per 1 phase) rated value</li> <li>at ballast (2 poles per 3 phases) rated value</li> <li>at resistive load (1 pole per 1 phase) rated</li> <li>at resistive load (2 poles per 1 phase) rated</li> <li>at resistive load (2 poles per 1 phase) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>30A @600V 2p 1ph</li> <li>30A @600V 2p 1ph</li> <li>30A @600V 3p 3ph</li> </ul>	
<ul> <li>at ballast (2 poles per 1 phase) rated value</li> <li>at ballast (3 poles per 3 phases) rated value</li> <li>at resistive load (1 pole per 1 phase) rated</li> <li>at resistive load (2 poles per 1 phase) rated</li> <li>at resistive load (2 poles per 1 phase) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> </ul>	
<ul> <li>at ballast (3 poles per 3 phases) rated value</li> <li>at resistive load (1 pole per 1 phase) rated</li> <li>at resistive load (2 poles per 1 phase) rated</li> <li>at resistive load (2 poles per 1 phase) rated</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>30A @600V 1p 1ph</li> <li>30A @600V 2p 1ph</li> <li>30A @600V 3p 3ph</li> <li>30A @600V 3p 3ph</li> </ul>	
<ul> <li>at resistive load (1 pole per 1 phase) rated value</li> <li>at resistive load (2 poles per 1 phase) rated at resistive load (2 poles per 1 phase) rated value</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>30A @600V 2p 1ph</li> <li>30A @600V 3p 3ph</li> </ul>	
<ul> <li>at resistive load (1 pole per 1 phase) rated value</li> <li>at resistive load (2 poles per 1 phase) rated value</li> <li>at resistive load (2 poles per 1 phase) rated value</li> <li>at resistive load (3 poles per 3 phases) rated</li> <li>30A @600V 1p 1ph</li> <li>30A @600V 2p 1ph</li> <li>30A @600V 3p 3ph</li> </ul>	
value  ● at resistive load (3 poles per 3 phases) rated 30A @600V 3p 3ph	
Auxiliary contact	
Number of NC contacts for auxiliary contacts 0	
Number of NO contacts for auxiliary contacts 0	
Number of total auxiliary contacts maximum 4	
Contact rating of auxiliary contacts of contactor NA according to UL	
Coil	
Type of voltage of the control supply voltage AC	
Control supply voltage	
• at AC at 50 Hz rated value 110 V	
• at AC at 60 Hz rated value 115 120 V	
Apparent pick-up power of magnet coil at AC 248 V·A	
Apparent holding power of magnet coil at AC 28 V·A	
Operating range factor control supply voltage rated value of magnet coil  0.85 1.1	
Enclosure	
Degree of protection NEMA rating of the enclosure NEMA Type 12	
Design of the housing  Dust tight and drip proof for indoors	
Mounting/wiring	
Mounting position Vertical	

Mounting type	Surface mounting and installation
Type of electrical connection for supply voltage lineside	Screw-type terminals
Tightening torque [lbf·in] for supply	35 35 lbf·in
Type of connectable conductor cross-sections at line- side at AWG conductors single or multi-stranded	2x (14 8 AWG)
Temperature of the conductor for supply maximum permissible	75 °C
Material of the conductor for supply	CU
Type of electrical connection for load-side outgoing feeder	Screw-type terminals
Tightening torque [lbf·in] for load-side outgoing feeder	35 35 lbf·in
Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder single or multi-stranded	2x (14 8 AWG)
Temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
Material of the conductor for load-side outgoing feeder	CU
Type of electrical connection of magnet coil	Screw-type terminals
Tightening torque [lbf·in] at magnet coil	15 15 lbf·in
Type of connectable conductor cross-sections of magnet coil at AWG conductors single or multi-stranded	2x (18 14 AWG)
Temperature of the conductor at magnet coil maximum permissible	75 °C
Material of the conductor at magnet coil	CU

Short-circuit current rating	
Design of the fuse link for short-circuit protection of the main circuit required	100kA@600V (Class R or J 40A max)
Design of the short-circuit trip	Thermal magnetic circuit breaker
Maximum short-circuit current breaking capacity (Icu)	
● at 240 V	24 kA
● at 480 V	65 kA
● at 600 V	25 kA
Certificate of suitability	NEMA ICS 2; UL 508


Industrial Controls - Product Overview (Catalogs, Brochures,...) www.usa.siemens.com/iccatalog


Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LCE02C302120A

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/US/en/ps/US2:LCE02C302120A

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=US2:LCE02C302120A&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=US2:LCE02C302120A&lang=en</a>

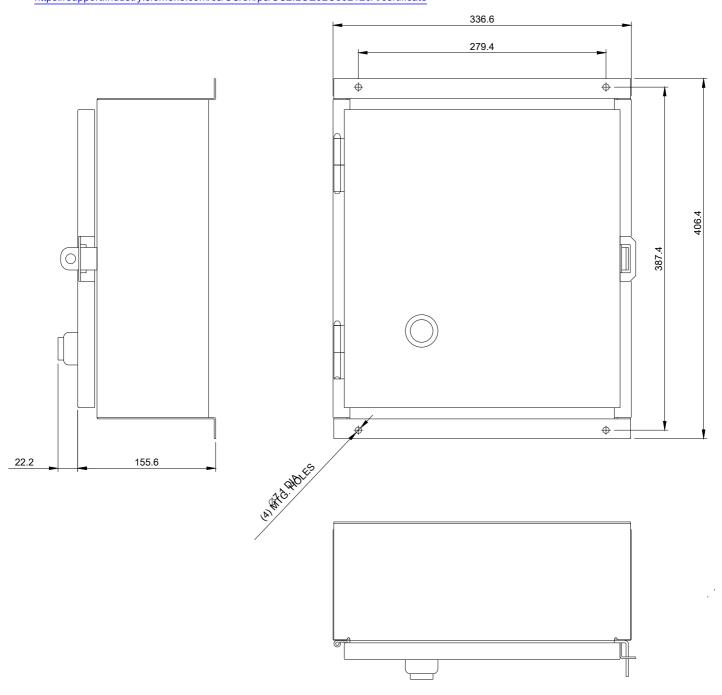

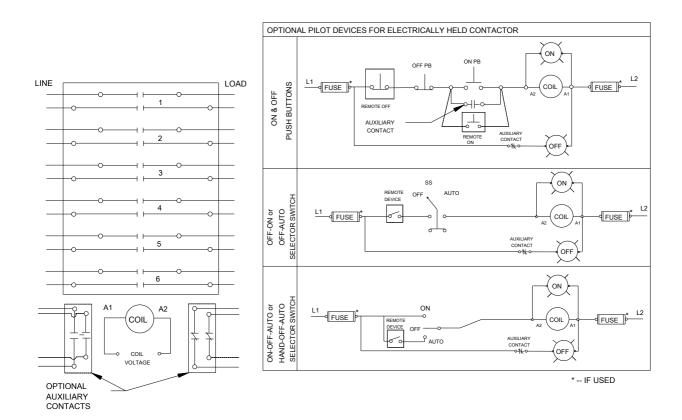

D38297001

last modified: 11/28/2019