



T5 High Output

54W/840 Min Bipin T5 HO ALTO UNP

Philips T5 HO lamps are environmentally-responsible, ultra-slim and have extraordinary light output and longer life.


Product data

| General Information | |
|------------------------------------|-----------------------------|
| Cap-Base | G5 [G5] |
| Features | HO Alto® [High Output Alto] |
| Light Technical | |
| Color Code | 841 [CCT of 4100K] |
| Luminous Flux | 5,000 lumen |
| Color Designation | Cool White (CW) |
| Correlated Color Temperature (Nom) | 4100 K |
| Luminous Efficacy (rated) (Nom) | 83 lm/W |
| Color rendering index (CRI) | 82 |
| Operating and Electrical | |
| Power Consumption | 54.1 W |
| Lamp Current (Nom) | 0.455 A |
| Controls and Dimming | |
| Dimmable | Yes |

| Mechanical and Housing | |
|---------------------------------|----------------------------------|
| Bulb Shape | T5 [16 mm (T5)] |
| Approval and Application | |
| Mercury (Hg) Content (Nom) | 1.4 mg |
| Product Data | |
| Order product name | 54W/840 Min Bipin T5 HO ALTO UNP |
| Order code | 927993184022 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 40 |
| Material Nr. (12NC) | 927993184022 |
| Full product name | 54W/840 Min Bipin T5 HO ALTO UNP |
| EAN/UPC - Case | 50046677290837 |
| EAN/UPC - Product/Case | 046677290832 |


T5 High Output

Dimensional drawing




| Product | D (max) | A (max) | B (max) | B (min) | C (max) |
|-------------------------|---------|------------|------------|------------|------------|
| 54W/840 Min Bipin T5 HO | 17 mm | 1,149.0 mm | 1,156.1 mm | 1,153.7 mm | 1,163.2 mm |
| ALTO UNP | | | | | |

Photometric data

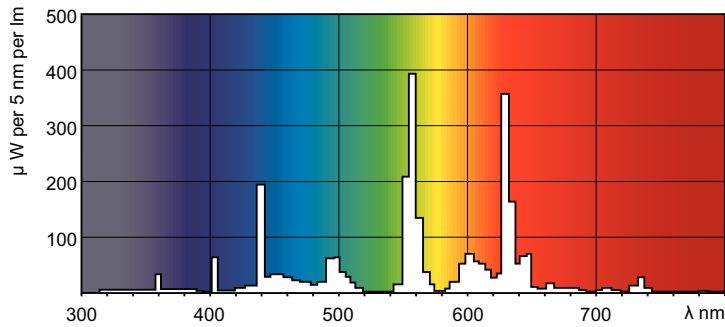


Spectral Power Distribution Colour - 54W/840 Min Bipin T5 HO ALTO UNP

Lifetime

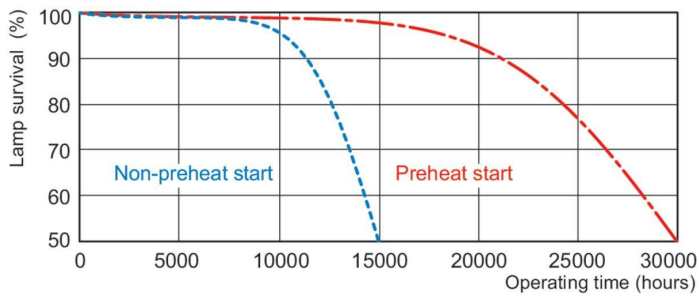


Life Expectancy Diagram - 54W/840 Min Bipin T5 HO ALTO UNP

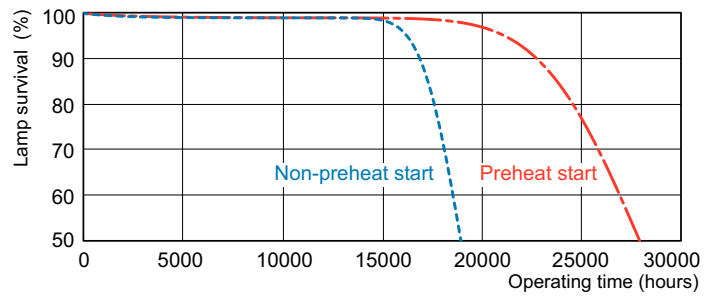

Life Expectancy Diagram - 54W/840 Min Bipin T5 HO ALTO UNP

T5 High Output

Lifetime

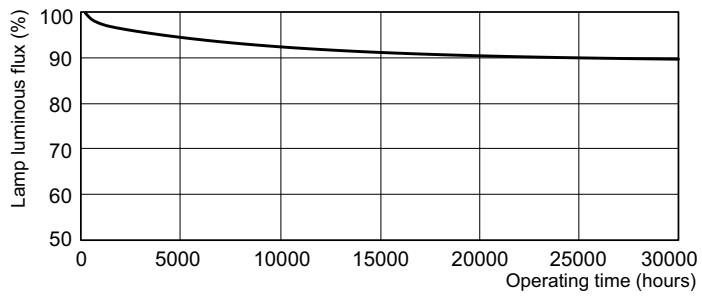

Lumen Maintenance Diagram - 54W/840 Min Bipin T5 HO ALTO UNP

