

ET 200pro RSE ST Reversing starter standard Mechanical switching
Electronic overload protection AC-3, 0.9 kW / 400 V 0.15 A...2.00 A
without brake contact Han Q4/2 - Han Q8/0



Figure similar

Product brand name	SIMATIC
Product designation	Motor starters
Design of the product	reversing starter
Product type designation	ET 200pro

General technical data	
Product function	
• on-site operation	Yes
Degree of pollution	3
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	400 V
Protection class IP	IP65
Shock resistance	15g / 11 ms
Mechanical service life (switching cycles)	
• of the main contacts typical	30 000 000
Type of assignment	1
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	A

Reference code acc. to DIN EN 81346-2	Q
Reference code acc. to DIN EN 61346-2	Q
Product function	
• direct start	No
• reverse starting	Yes
Product component Motor brake output	No
Product feature	
• brake control with 230 V AC	No
• brake control with 400 V AC	No
• brake control with 24 V DC	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No
Product function Short circuit protection	Yes
Design of short-circuit protection	fuse
Trip class	CLASS 10
Maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	100 000 A

Safety related data

B10 value	
• with high demand rate acc. to SN 31920	1 000 000
Proportion of dangerous failures	
• with low demand rate acc. to SN 31920	50 %
• with high demand rate acc. to SN 31920	75 %
Failure rate [FIT]	
• with low demand rate acc. to SN 31920	100 FIT
T1 value for proof test interval or service life acc. to IEC 61508	20 y
Protection against electrical shock	finger-safe

Main circuit

Number of poles for main current circuit	3
Design of the switching contact	electromechanical
Adjustable pick-up value current of the current-dependent overload release	0.15 ... 2 A
Type of the motor protection	solid-state
Type of voltage	AC
Operating voltage	
• rated value	200 ... 400 V
Operating range relative to the operating voltage at AC	
• at 50 Hz	200 ... 440 V
Operating current	
• at AC at 400 V rated value	2 A

• at AC-3 — at 400 V rated value	2 A
Operating power • at AC-3 — at 400 V rated value	900 W
Inputs/ Outputs	
Product function • digital inputs parameterizable • digital outputs parameterizable	No No
Number of digital inputs	0
Number of sockets • for digital output signals • for digital input signals	0 0
Supply voltage	
Type of voltage of the supply voltage	DC
Supply voltage 1 at DC	24 ... 24 V
Supply voltage 1 at DC rated value • minimum permissible • maximum permissible	20.4 V 28.8 V
Control circuit/ Control	
Type of voltage of the control supply voltage	DC
Control supply voltage at DC • rated value	20.4 ... 28.8 V
Control supply voltage 1 • at DC rated value • at DC	20.4 ... 28.8 V 24 ... 24 V
Power loss [W] in auxiliary and control circuit • in switching state OFF — with bypass circuit — without bypass circuit • in switching state ON — with bypass circuit — without bypass circuit	1.6416 W 1.6416 W 3.888 W 3.888 W
Installation/ mounting/ dimensions	
Mounting position	vertical, horizontal
Mounting type	screw fixing
Height	230 mm
Width	110 mm
Depth	150 mm
Ambient conditions	

Installation altitude at height above sea level	
• maximum	3 500 m
Relative humidity during operation	5 ... 95 %

Communication/ Protocol

Protocol is supported	
• PROFIBUS DP protocol	Yes
• PROFINET protocol	Yes
Design of the interface	
• PROFINET protocol	Yes
Product function Bus communication	Yes
Protocol is supported	
• AS-Interface protocol	No
Product function	
• supports PROFINET energy measured values	Yes
• supports PROFINET shutdown	Yes
address range memory of address range	
• of the inputs	2 byte
• of the outputs	2 byte
Type of electrical connection	
• of the communication interface	via backplane bus

Connections/ Terminals

Type of electrical connection	
• for main current circuit	tab terminals
Type of electrical connection	
• 1 for digital input signals	M12 socket
• 2 for digital input signals	M12 socket
• 3 for digital input signals	M12 socket
• 4 for digital input signals	M12 socket
Type of electrical connection	
• at the manufacturer-specific device interface	optical interface
• for main energy infeed	socket according to ISO23570
• for load-side outgoing feeder	socket according to ISO23570
• for main energy transmission	socket according to ISO23570
• for supply voltage line-side	via backplane bus
• for supply voltage transmission	via backplane bus

UL/CSA ratings

Operating voltage	
• at AC at 60 Hz acc. to CSA and UL rated value	600 V

Certificates/ approvals

General Product Approval			EMC	Declaration of Conformity	
					
CCC	CSA	UL		RCM	EG-Konf.

Declaration of Conformity	Test Certificates	other
Miscellaneous	Type Test Certificates/Test Report	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-5KS40-5AA0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1304-5KS40-5AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-5KS40-5AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1304-5KS40-5AA0&lang=en

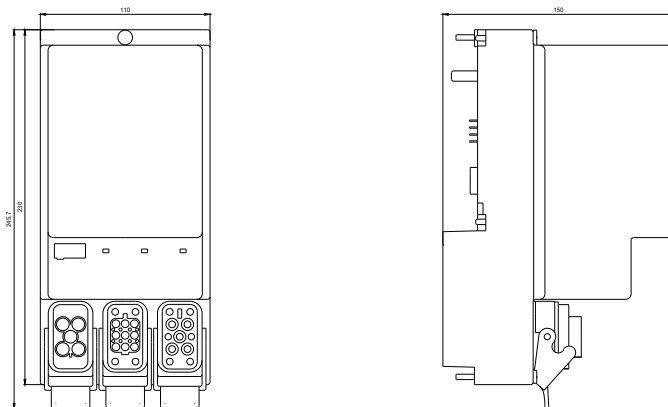

last modified:

07/26/2019