


Product type designation

MDS D200 transponder

Transponder MDS D200 for RF200/RF300 ISO/MOBY D, PVC ISO card, ISO 15693, Chip type TI TAGIT HFI, 256-byte user memory; 85x 54x 0.8 mm (LxWxH); Minimum order quantity 250 units

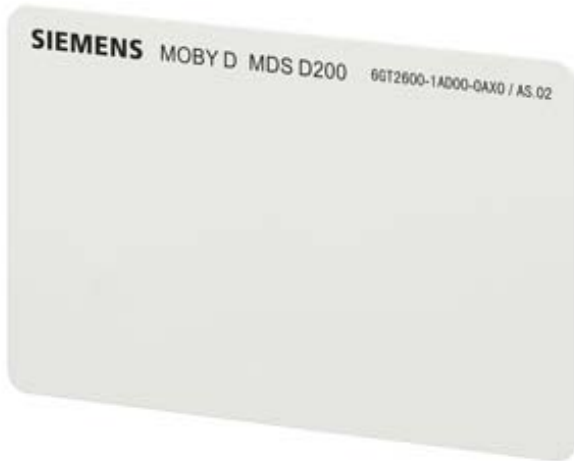

Suitability for operation

RF200, RF300, MOBY D

Wireless frequencies

Operating frequency / Rated value	13.56 MHz
Range / maximum	600 mm; range is reader dependent: observe http://support.automation.siemens.com/WW/view/en/67384964
Protocol / with radio transmission	ISO 15693
Transfer rate / with radio transmission / maximum	26.5 kbit/s
Product feature / multitag-capable	Yes

Electrical data

Product component / Backup battery	No
------------------------------------	----

Memory

Type of memory	EEPROM
Storage capacity / of the user memory	256 byte
Type of memory organization	UID (fixed code) 8 bytes, user memory 256 bytes, configuration memory 8 bytes
Number of read cycles / at ambient temperature < 40 °C / maximum	10000000000000

Number of write cycles / at ambient temperature < 40 °C / maximum	1000000
Data retention time / at ambient temperature < 40 °C / not less than	10 y
Property of memory	Block-by-block write protection of the user memory
Type of transponder chip used	TI Tag-it HFI

Mechanical data

Material	PVC laminated plastic
Color	white
Mounting distance / relating to metal surfaces / recommended / minimum	25 mm

Permitted ambient conditions

Ambient temperature	
<ul style="list-style-type: none"> during read/write access 	-20 ... +60 °C
<ul style="list-style-type: none"> outside the read/write area 	-20 ... +60 °C
<ul style="list-style-type: none"> during storage 	-20 ... +60 °C
Protection class IP	IP67
Shock resistance	According to DIN EN 60721-3-7 Class 7 M3
Resistance to mechanical stress	Shock and vibration according to ISO 10373 / ISO 7810, torsion and twisting according to ISO 10373 / ISO 7816-1

Design, dimensions and weight

Width	54 mm
Height	0.8 mm
Depth	85 mm
Net weight	5 g
Mounting type	Gluing, mounting bag (see accessories)

Product properties, functions, components / general

Product feature	
<ul style="list-style-type: none"> printable 	Yes
Printing process	Printable on both sides

Standards, specifications, approvals

MTBF	228 y
------	-------

Accessories

accessories	Fixing strap, holder, spacer
-------------	------------------------------

Further Information / Internet Links

Internet-Link	
<ul style="list-style-type: none"> to website: Selector SIMATIC NET SELECTION TOOL 	https://support.industry.siemens.com/cs/ww/en/view/67384964
<ul style="list-style-type: none"> to website: Industrial communication 	http://www.siemens.com/ident/rfid
<ul style="list-style-type: none"> to website: Industry Mall 	https://mall.industry.siemens.com
<ul style="list-style-type: none"> to website: Information and Download Center 	http://www.siemens.com/industry/infocenter

- to website: Image database
- to website: CAx Download Manager
- to website: Industry Online Support

<http://automation.siemens.com/bilddb>

<http://www.siemens.com/cax>

<https://support.industry.siemens.com>

last modified:

08/12/2019