Flush Service Floor Boxes

Multiple-Gang Floor Boxes for Power and Communications: 740 Series

The new 740 Series line of stamped-steel floor boxes are an extension of T&B's industry-leading 640 and 840 series cast-iron floor boxes. The new boxes provide flush service for power, communications and data. Multiple-gang boxes allow the user to place high- and low-voltage in a single floor box. The 740 series can be used for carpet or tile applications.

- Available in shallow (2⅝") and deep (3⅝") versions
- UL Listed and CSA certified
- Available in one-, two- and three-gang versions
- Two- and three-gang boxes are supplied with customer-installed dividers
- 16 ga. pre-galvanized steel construction
- Adjustable with four exterior leveling legs capable of 2" pre-pour adjustment and an interior leveling ring capable of 1¼" after-pour adjustment
- Made with a variety of KOs ranging from ½" to 1¼"
- Boxes utilize the 640P series metallic and non-metallic floor box accessories with the unique one-step installation method
- Shipped with expendable steel cap to prevent ingress of concrete at installation

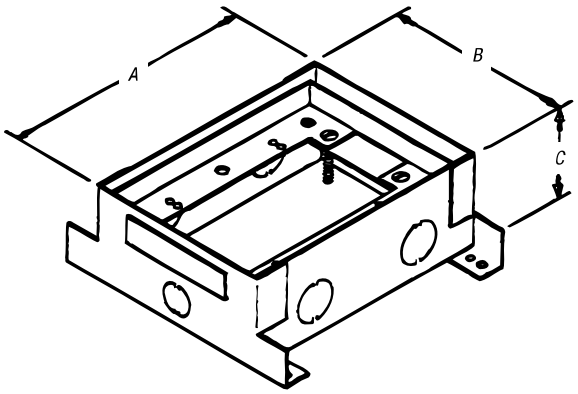

CAT. NO.	DESCRIPTION	STD. CTN.
741-S	Shallow One-Gang Steel Floor Box for Concrete Construction	4
742-S	Shallow Two-Gang Steel Floor Box for Concrete Construction	1
743-S	Shallow Three-Gang Steel Floor Box for Concrete Construction	1
741-D	Deep One-Gang Steel Floor Box for Concrete Construction	4
742-D	Deep Two-Gang Steel Floor Box for Concrete Construction	1
743-D	Deep Three-Gang Steel Floor Box for Concrete Construction	1

Engineering Data for 740 Series

CAT. NO.	DIMENSIONS (IN.)			ADJUSTMENT (IN.)		CAPACITY PER GANG	CONDUIT KOS (IN.)		
	A	B	C	BEFORE POUR	AFTER POUR		SIDES	ENDS	BOTTOM
741-S	4	5½	2⅝	2	1½	29 cu. in.	(2) ¾	(2) ½	(1) ½ & (1) ¾
742-S	7¼	5½	2⅝	2	1½	26 cu. in.	(4) ¾	(2) ½	(2) ½ & (2) ¾
743-S	10¼	5½	2⅝	2	1½	26 cu. in.	(6) ¾	(2) ½	(3) ½ & (3) ¾
741-D	4	5½	3⅝	2	1½	48 cu. in.	(2) ¾	(2) 1¼	(1) ¾ & (1) ¾
742-D	7¼	5½	3⅝	2	1½	41 cu. in.	(4) ¾	(2) 1¼	(2) ½ & (2) ¾
743-D	10¼	5½	3⅝	2	1½	41 cu. in.	(6) ¾	(2) 1¼	(3) ½ & (3) ¾

Thomas&Betts

United States
Tel: 901.252.8000
800.816.7809
Fax: 901.252.1354

Technical Services
Tel: 888.862.3289

www.tnb.com