


product type designation

product description

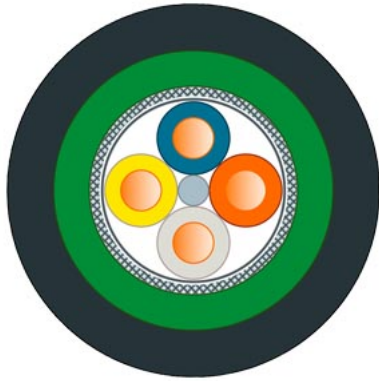

IE TP Ground Cable 2x2 (Type C)

Standard bus cable (4-core), for laying underground, sold by the meter, unassembled

IE ground cable 2x2 Underground cable 4-core shielded, sold by the meter delivery unit max. 1000 m minimum order quantity 20 m.

suitability for use

Standard cable with rigid cores for fast installation

cable designation

2YY(ST)CY2Y2x2x0.64/1.50-100 SF/UTP

electrical data

attenuation factor per length

- at 10 MHz / maximum
- at 100 MHz / maximum

0.063 dB/m
0.213 dB/m

impedance

- at 1 MHz ... 100 MHz

100 Ω

relative symmetrical tolerance

- of the characteristic impedance at 1 MHz ... 100 MHz

5 %

near-end crosstalk per length

- at 1 MHz ... 100 MHz

0.5 dB/m

transfer impedance per length / at 10 MHz

10 mΩ/m

loop resistance per length / maximum

124 mΩ/m

operating voltage

- RMS value

100 V

NVP value in percent

65 %

mechanical data

number of electrical cores

4

design of the shield

Overlapped aluminum-clad foil, sheathed in a braided screen of tin-plated copper wires

type of electrical connection / FastConnect

Yes

core diameter

- of AWG22 insulated conductor

0.64 mm

outer diameter

- of inner conductor
- of the wire insulation
- of the inner sheath of the cable
- of cable sheath
- of cable sheath / note

0.64 mm
1.5 mm
4 mm
9 mm

Cable diameter >6.5 mm because of additional PE outer cover. Cable can only be connected to RJ45/M12 connector after outer cover is removed.

symmetrical tolerance of the outer diameter / of cable sheath

0.2 mm

material

- of the wire insulation
- of the inner sheath of the cable
- of cable sheath

polyethylene (PE)
PVC
PE/PVC

color

- of the insulation of data wires

white/yellow/blue/orange

<ul style="list-style-type: none"> • of cable sheath 	Black
bending radius	
<ul style="list-style-type: none"> • with single bend / minimum permissible 	80 mm
<ul style="list-style-type: none"> • with multiple bends / minimum permissible 	80 mm
tensile load / maximum	150 N
weight per length	97 kg/km
ambient conditions	
ambient temperature	
<ul style="list-style-type: none"> • during operation 	-40 ... +70 °C
<ul style="list-style-type: none"> • during storage 	-40 ... +70 °C
<ul style="list-style-type: none"> • during transport 	-40 ... +70 °C
<ul style="list-style-type: none"> • during installation 	-5 ... +50 °C
<ul style="list-style-type: none"> • note 	Electrical properties measured at 20 °C, tests according to EN50288-2-1
fire behavior	inflammable
class of burning behaviour / according to EN 13501-6	Fca
chemical resistance	
<ul style="list-style-type: none"> • to mineral oil 	conditional resistance
<ul style="list-style-type: none"> • to grease 	Conditional resistance
<ul style="list-style-type: none"> • to water 	Resistant
radiological resistance / to UV radiation	resistant
product features, product functions, product components / general	
product feature	
<ul style="list-style-type: none"> • halogen-free 	No
<ul style="list-style-type: none"> • silicon-free 	Yes
wire length / for Industrial Ethernet	
<ul style="list-style-type: none"> • with 100BaseTX 	100 m
standards, specifications, approvals	
UL/ETL listing / 300 V Rating	No
UL/ETL style / 600 V Rating	No
certificate of suitability	
<ul style="list-style-type: none"> • EAC approval 	Yes
<ul style="list-style-type: none"> • CE marking 	Yes
<ul style="list-style-type: none"> • RoHS conformity 	Yes
standard for structured cabling	Cat5e
Marine classification association	
<ul style="list-style-type: none"> • American Bureau of Shipping Europe Ltd. (ABS) 	No
<ul style="list-style-type: none"> • French marine classification society (BV) 	No
<ul style="list-style-type: none"> • Det Norske Veritas (DNV) 	No
<ul style="list-style-type: none"> • Germanische Lloyd (GL) 	No
<ul style="list-style-type: none"> • Lloyds Register of Shipping (LRS) 	No
<ul style="list-style-type: none"> • Nippon Kaiji Kyokai (NK) 	No
<ul style="list-style-type: none"> • Polski Rejestr Statkow (PRS) 	No
reference code	
<ul style="list-style-type: none"> • according to IEC 81346-2 	WG
<ul style="list-style-type: none"> • according to IEC 81346-2:2019 	WGB
further information / internet links	
internet link	
<ul style="list-style-type: none"> • to web page: selection aid TIA Selection Tool 	http://www.siemens.com/tia-selection-tool
<ul style="list-style-type: none"> • to website: Industrial communication 	http://www.siemens.com/simatic-net
<ul style="list-style-type: none"> • to website: Industry Mall 	https://mall.industry.siemens.com
<ul style="list-style-type: none"> • to website: Information and Download Center 	http://www.siemens.com/industry/infocenter
<ul style="list-style-type: none"> • to website: Selection guide for cables and connectors 	https://sie.ag/2QdlxcP
<ul style="list-style-type: none"> • to website: Image database 	http://automation.siemens.com/bilddb
<ul style="list-style-type: none"> • to website: CAX-Download-Manager 	http://www.siemens.com/cax
<ul style="list-style-type: none"> • to website: Industry Online Support 	https://support.industry.siemens.com

last modified:

8/7/2023 