

Overload relay 62...73 A Thermal For motor protection Size S2,  
Class 10A Stand-alone installation Main circuit: Screw Auxiliary  
circuit: spring-type terminal Manual-Automatic-Reset



|                          |                        |
|--------------------------|------------------------|
| Product brand name       | SIRIUS                 |
| Product designation      | thermal overload relay |
| Product type designation | 3RU2                   |

| General technical data   |        |
|--|--------|
| Size of overload relay   | S2     |
| Size of contactor can be combined company-specific                             | S2     |
| Power loss [W] for rated value of the current                                  |        |
| • at AC in hot operating state   | 17.1 W |
| • at AC in hot operating state per pole  | 5.7 W  |
| Insulation voltage with degree of pollution 3 rated value                      | 690 V  |
| Surge voltage resistance rated value   | 6 kV   |
| maximum permissible voltage for safe isolation                                 |        |
| • in networks with grounded star point between auxiliary and auxiliary circuit | 415 V  |
| • in networks with grounded star point between auxiliary and auxiliary circuit | 415 V  |
| • in networks with grounded star point between main and auxiliary circuit      | 690 V  |

|   |                            |
|---|----------------------------|
| <ul style="list-style-type: none"> <li>in networks with grounded star point between main and auxiliary circuit</li> </ul>   | 690 V                      |
| <b>Protection class IP</b> <ul style="list-style-type: none"> <li>on the front</li> <li>of the terminal</li> </ul>  | IP20<br>IP00               |
| <b>Shock resistance</b> <ul style="list-style-type: none"> <li>acc. to IEC 60068-2-27</li> </ul>  | 8g / 11 ms                 |
| <b>Recovery time</b> <ul style="list-style-type: none"> <li>after overload trip with automatic reset typical</li> <li>after overload trip with remote-reset</li> <li>after overload trip with manual reset</li> </ul> | 10 min<br>10 min<br>10 min |
| <b>Type of protection according to ATEX directive 2014/34/EU</b>  | Ex II (2) GD               |
| Certificate of suitability according to ATEX directive 2014/34/EU   | DMT 98 ATEX G 001          |
| <b>Reference code acc. to DIN EN 81346-2</b>  | F                          |

### Ambient conditions

|   |  |
|---|--|
| <b>Installation altitude at height above sea level</b> <ul style="list-style-type: none"> <li>maximum</li> </ul>                                | 2 000 m  |
| <b>Ambient temperature</b> <ul style="list-style-type: none"> <li>during operation</li> <li>during storage</li> <li>during transport</li> </ul> | -40 ... +70 °C<br>-55 ... +80 °C<br>-55 ... +80 °C |
| <b>Temperature compensation</b>   | -40 ... +60 °C                                     |
| Relative humidity during operation  | 10 ... 95 %  |

### Main circuit

|   |                |
|---|----------------|
| <b>Number of poles for main current circuit</b>   | 3              |
| <b>Adjustable pick-up value current of the current-dependent overload release</b>   | 62 ... 73 A    |
| <b>Operating voltage</b> <ul style="list-style-type: none"> <li>rated value</li> <li>at AC-3 rated value maximum</li> </ul> | 690 V<br>690 V |
| <b>Operating frequency rated value</b>  | 50 ... 60 Hz   |
| <b>Operating current rated value</b>  | 73 A           |

### Auxiliary circuit

|  |                                  |
|--|----------------------------------|
| <b>Design of the auxiliary switch</b>  | integrated                       |
| <b>Number of NC contacts for auxiliary contacts</b> <ul style="list-style-type: none"> <li>Note</li> </ul> | 1<br>for contactor disconnection |
| <b>Number of NO contacts for auxiliary contacts</b> <ul style="list-style-type: none"> <li>Note</li> </ul> | 1<br>for message "Tripped"       |
| <b>Number of CO contacts</b> <ul style="list-style-type: none"> <li>for auxiliary contacts</li> </ul>      | 0                                |

|   |   |
|---|---|
| <b>Operating current of auxiliary contacts at AC-15</b>         |   |
| • at 24 V   | 3 A   |
| • at 110 V  | 3 A   |
| • at 120 V  | 3 A   |
| • at 125 V  | 3 A   |
| • at 230 V  | 2 A   |
| • at 400 V  | 1 A   |
| <b>Operating current of auxiliary contacts at DC-13</b>         |   |
| • at 24 V   | 2 A   |
| • at 60 V   | 0.3 A   |
| • at 110 V  | 0.22 A  |
| • at 125 V  | 0.22 A  |
| • at 220 V  | 0.11 A  |
| <b>Design of the miniature circuit breaker</b>                  |   |
| • for short-circuit protection of the auxiliary switch required | 6A (SCC less than equal to 0.5 kA; U less than equal to 260V) |
| <b>Contact rating of auxiliary contacts according to UL</b>     | B600 / R300   |

### Protective and monitoring functions

|                                       |           |
|---------------------------------------|-----------|
| <b>Trip class</b>                     | CLASS 10A |
| <b>Design of the overload release</b> | thermal   |

### UL/CSA ratings

|   |      |
|---|------|
| <b>Full-load current (FLA) for three-phase AC motor</b> |      |
| • at 480 V rated value                                  | 73 A |
| • at 600 V rated value                                  | 73 A |

### Short-circuit protection

|   |                           |
|---|---------------------------|
| <b>Design of the fuse link</b>                                  |                           |
| • for short-circuit protection of the auxiliary switch required | fuse gG: 6 A, quick: 10 A |

### Installation/ mounting/ dimensions

|                              |                          |
|------------------------------|--------------------------|
| <b>Mounting position</b>     | any                      |
| <b>Mounting type</b>         | stand-alone installation |
| <b>Height</b>                | 105 mm                   |
| <b>Width</b>                 | 55 mm                    |
| <b>Depth</b>                 | 117 mm                   |
| <b>Required spacing</b>      |                          |
| • with side-by-side mounting |                          |
| — forwards                   | 10 mm                    |
| — Backwards                  | 0 mm                     |
| — upwards                    | 10 mm                    |
| — downwards                  | 10 mm                    |
| — at the side                | 10 mm                    |

- for grounded parts
  - forwards 10 mm
  - Backwards 0 mm
  - upwards 10 mm
  - at the side 10 mm
  - downwards 10 mm
- for live parts
  - forwards 10 mm
  - Backwards 0 mm
  - upwards 10 mm
  - downwards 10 mm
  - at the side 10 mm

10 mm  
0 mm  
10 mm  
10 mm  
10 mm  
10 mm  
0 mm  
10 mm  
10 mm  
10 mm

## Connections/ Terminals

|   |  |
|---|--|
| <b>Product function</b>   |  |
| <ul style="list-style-type: none"> <li>• removable terminal for auxiliary and control circuit</li> </ul>  | No   |
| <b>Type of electrical connection</b>  |  |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control current circuit</li> </ul>   | screw-type terminals<br>spring-loaded terminals  |
| <b>Arrangement of electrical connectors for main current circuit</b>  | Top and bottom   |
| <b>Type of connectable conductor cross-sections</b>   |  |
| <ul style="list-style-type: none"> <li>• for main contacts               <ul style="list-style-type: none"> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG conductors for main contacts</li> </ul>  | 2x (1 ... 35 mm <sup>2</sup> ), 1x (1 ... 50 mm <sup>2</sup> )<br>2x (1 ... 25 mm <sup>2</sup> ), 1x (1 ... 35 mm <sup>2</sup> )<br>2x (18 ... 2), 1x (18 ... 1) |
| <b>Type of connectable conductor cross-sections</b>   |  |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts               <ul style="list-style-type: none"> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>• at AWG conductors for auxiliary contacts</li> </ul> | 2x (0,5 ... 2,5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 14)                                    |
| <b>Tightening torque</b>  |  |
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> </ul>   | 3 ... 4.5 N·m  |
| <b>Design of screwdriver shaft</b>  | Diameter 5 ... 6 mm  |
| <b>Size of the screwdriver tip</b>  | Pozidriv PZ 2  |
| <b>Design of the thread of the connection screw</b>   |  |
| <ul style="list-style-type: none"> <li>• for main contacts</li> </ul>   | M6   |

## Safety related data

|   |      |
|---|------|
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b> | 20 y |
|---|------|

## Display

### Display version

- for switching status

Slide switch

## Certificates/ approvals

### General Product Approval



CCC



CSA



UL



ATEX



IECEX

### Declaration of Conformity



EG-Konf.

[Miscellaneous](#)

### Test Certificates

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

### Marine / Shipping



ABS



BUREAU VERITAS

### Marine / Shipping



LRS



PRS



RINA



RMRS



DNVGL.COM/AF

### other

[Confirmation](#)

## Railway

[Special Test Certificate](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

[www.siemens.com/sirius/catalogs](http://www.siemens.com/sirius/catalogs)

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2136-4KD1>

### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2136-4KD1>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RU2136-4KD1>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RU2136-4KD1&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2136-4KD1&lang=en)


### Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RU2136-4KD1/char>

### Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2136-4KD1&objecttype=14&gridview=view1>

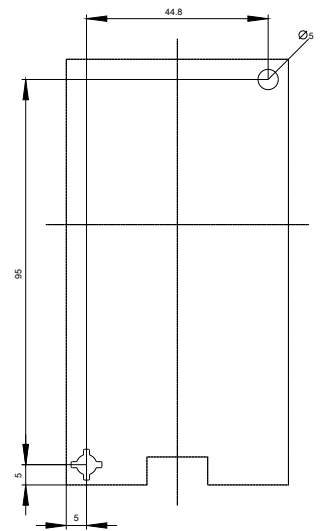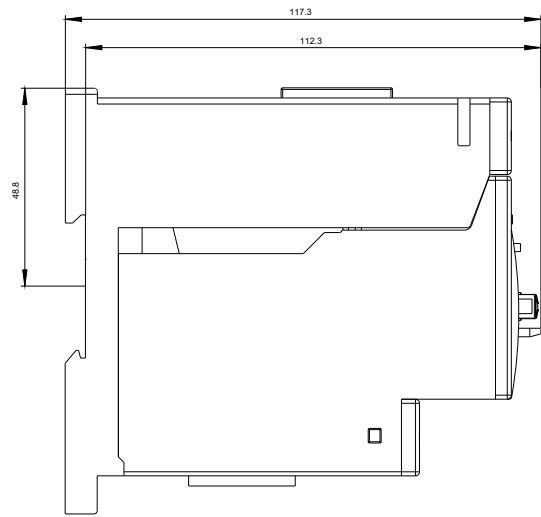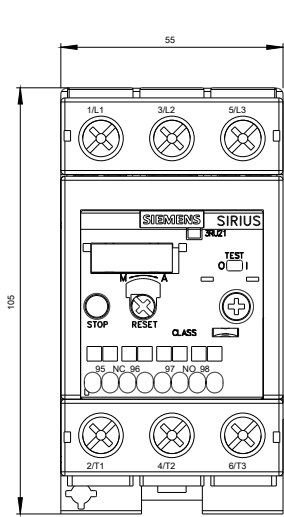

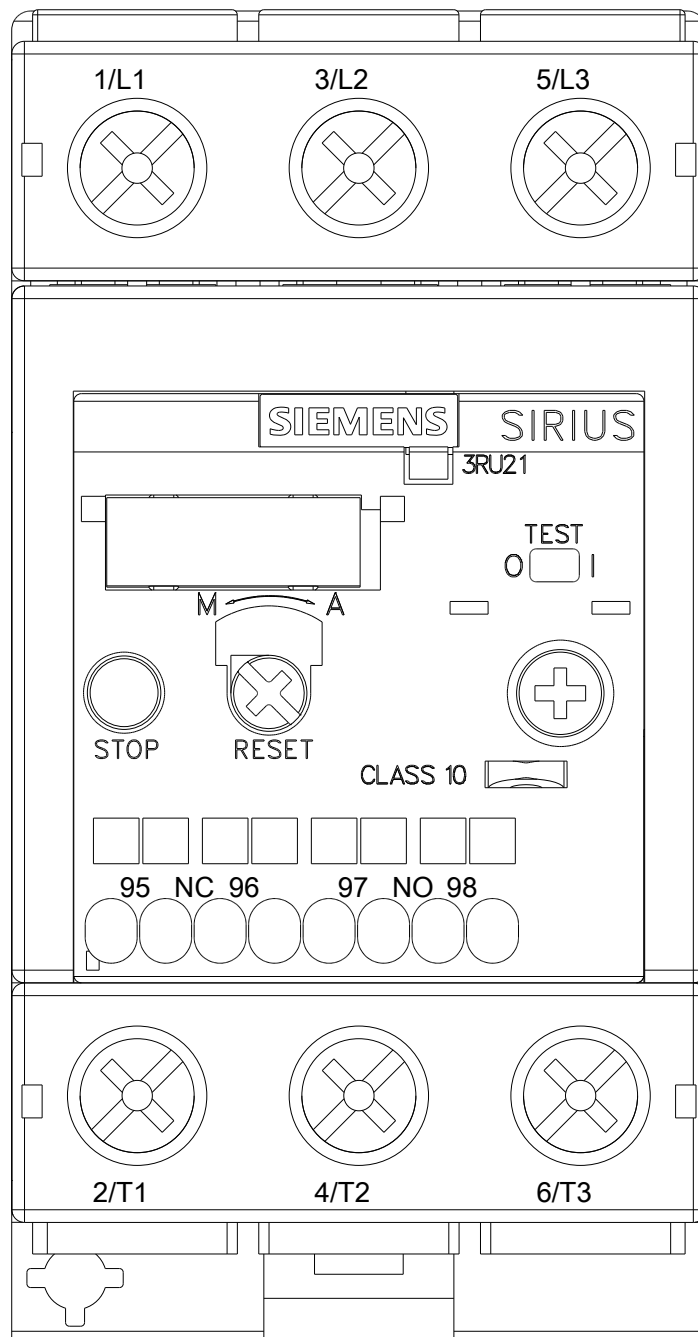

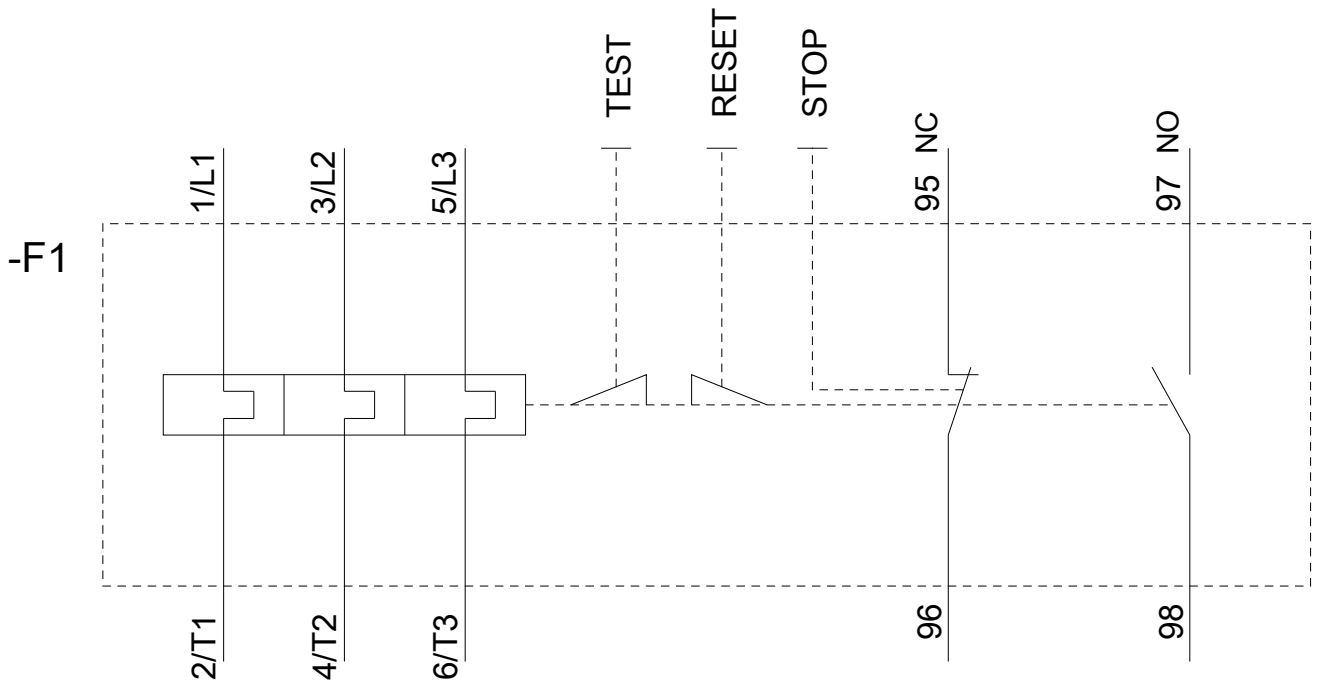

last modified:

11/19/2019