

Catalog Numbers

Catalog No.	Breaker Rating(Max)	Breaker Type	Interrupting Rating(Max)
WBT312X200	200A	JXD6	65,000
WBT312X200U	200A	HJXD6	100,000
WBT312X250	250A	JXD6	65,000
WBT312X250U	250A	HJXD6	100,000
WBT312X300	300A	JXD6	65,000
WBT312X300U	300A	HJXD6	100,000
WBT312X350	350A	JXD6	65,000
WBT312X350U	350A	HJXD6	100,000
WBT312X400	400A	JXD6	65,000
WBT312X400U	400A	HJXD6	100,000
WBT312X450	450A	LXD6	65,000
WBT312X450U	450A	HLXD6	100,000
WBT312X500	500A	LXD6	65,000
WBT312X500U	500A	HLXD6	100,000
WBT312X600	600A	LXD6	65,000
WBT312X600U	600A	HLXD6	100,000

Features and Ratings

- MODULE RATING: 1200 AMPS MAX.
- MAIN VERTICAL BUS RATING: 1200 AMPS MAX.
- MAIN HORIZONTAL BUS RATING: SEE BREAKER RATING
- 208Y/120 VAC, 3 PHASE, 4 WIRE
- 240/120 VAC, 3 PHASE, 4 WIRE, DELTA (B PHASE IS HIGH LEG)
- TYPE 3R OUTDOOR ENCLOSURE
- FOR OVERHEAD OR UNDERGROUND FEED
- FEED THRU TERMINAL LANDINGS

Lug Kits and Replacement Parts

Lugs for Phase and Neutral Connections (not supplied)					
NEMA Lug ^①	MFG	Wire Range	Type	No. Wires per phase	Torque (lb.-in.)
LK33750N2	Siemens	300-750 kcmil	Mechanical	3	500 ^②
LK34500N2	Siemens	1/0-500 kcmil	Mechanical	4	500
ALND-500-12-134	ILSCO	500 kcmil	Compression	4	NA ^③
ALND-700/750-12-134	ILSCO	750 kcmil	Compression	3	NA ^③

- ① Order one mechanical lug kit for mains and neutral. Additional lug kit is required for feed-thru terminals. Contact lug manufacturer for compression lug quantities supplied for each kit.
- ② Kit contains more than one lug type.
- ③ See lug manufacturer's instruction sheet supplied with the connector for tool, die, and number of crimps.

Additional Modules

FOR USE WITH:	
Module Description	Siemens Series#
Main Breakers	WB(M), WEB(M), WXB(M), BFT(M)
Switches	WMP, WS, WES, WXS
Tap/Terminal Boxes	WTB, WET, WT_PU, WTBN, WBT(M)
Pull Boxes	WMMB
Meter Module	(W)MM, (W)MT, (W)ML, (W)MK, (W)MLZ(F), (W)MN
Meter Combinations	WC, WCL, WCT,
Extension Box	WSP, WSPD
Bussed Elbow	BE, (W)ELB

Accessories




ECMMGBE - Ground Bus Extension
Ground Terminal G
(Accessory Cat.# ECMLK3225):
Wire size #4-300 kcmil. Torque terminal to 250 lb.-in.

Connect Modules Using:	
Catalog Number / Torque	
QuickConnect	QC4, Torque 400-440 lb-in (35-36 ft.-lb.)


Equip Ground Acc'y	Cat. No. ECLX072M
Small Terminals	Large Terminals
Wire Range / Torque	Wire Range / Torque
10-14 AWG 20 lb-in	10-14 AWG 35 lb-in
8 AWG 25 lb-in	8 AWG 40 lb-in
6 AWG 35 lb-in	1/0-6 AWG . 45 lb-in

Use HD Type Hubs if required	
Trade Size (in)	Catalog No.
2"	EC56854
2-1/2"	EC56855
3"	EC56856
3-1/2"	EC56857
4"	EC56858
Cover Plate	EC56933S


Schematic

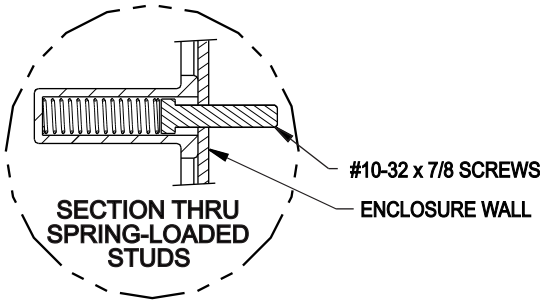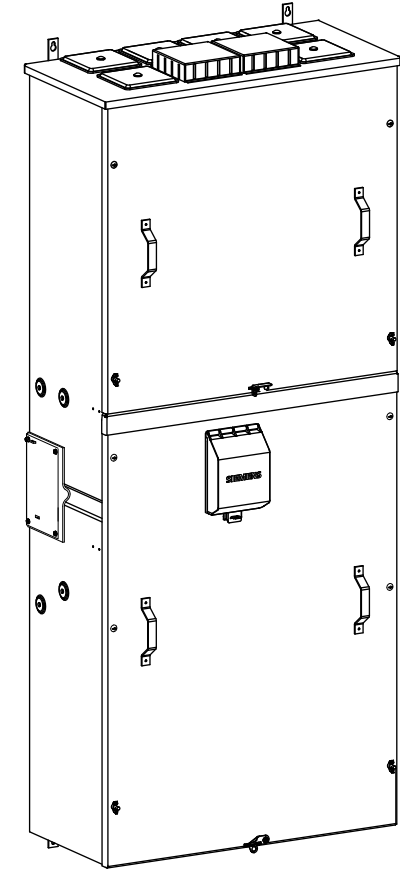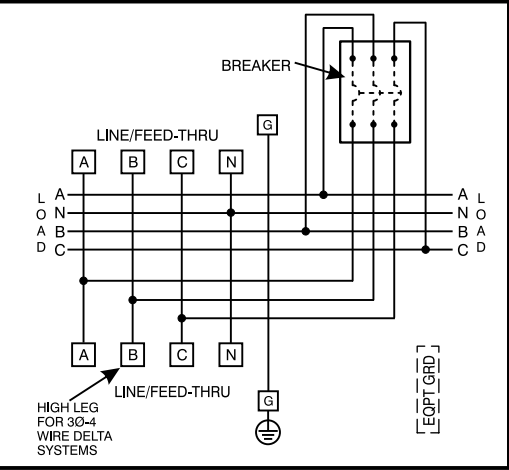

VIEW SHOWN WITHOUT COVERS

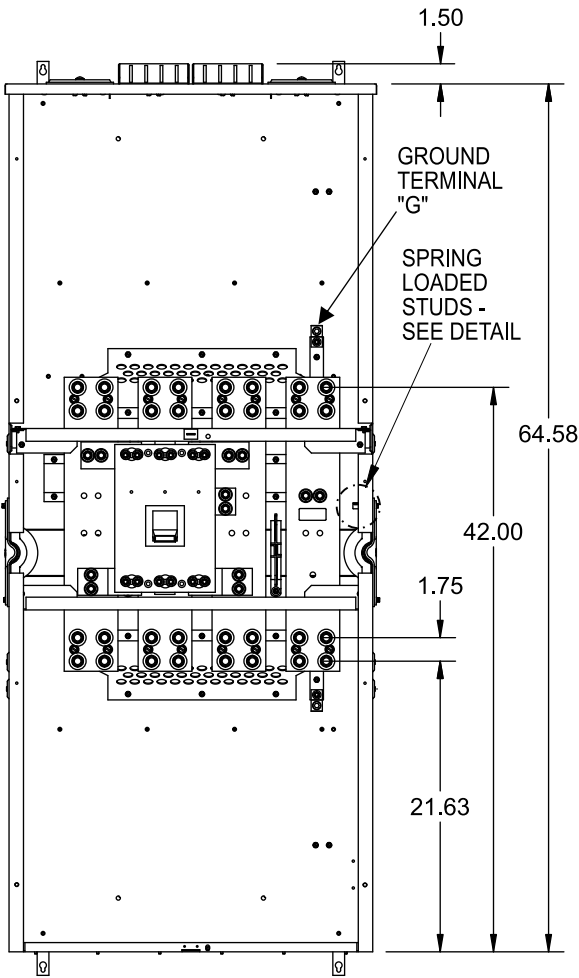

Catalog No. WBT312X600 Shown

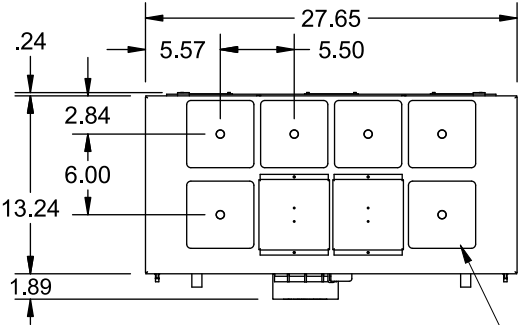

HD HUB PROVISIONS (6)
COVER PLATES INCLUDED

