

65 mm terminal module for F-DS1E-X with supply line connection with coding for shutdown groups



General technical data:

<b>Product designation</b>		Terminal module
<b>Product type designation</b>		TM-FDS65-S32-01 FS L
<b>Design of the product</b>		for F-DS1e-x, with energy bus infeed, with caps
<b>Mounting height</b>	mm	290
<b>Installation width</b>	mm	65
<b>Installation depth</b>	mm	100
<b>Protection class IP</b>		IP20
<b>Insulation voltage rated value</b>	V	690
<b>Operating voltage</b>		
• at AC rated value	V	500
<b>Surge voltage resistance rated value</b>	V	6 000
<b>Operating current rated value</b>	A	50
<b>Operating frequency</b>		
• 1 rated value	Hz	50
• 2 rated value	Hz	60
<b>Type of connectable conductor cross-sections</b>		
• solid		1x 10 mm <sup>2</sup> , 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> )

- finely stranded with core end processing
- at AWG conductors
  - solid
  - stranded

	2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), acc. to IEC 60947
	2x (14 ... 10)
	2x (14 ... 10)

**Installation/ mounting/ dimensions:**

<b>Size of the screwdriver tip</b>		Standard screwdriver Size 2
Tightening torque with screw-type terminals	N·m	2 ... 2.5

**Further information**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrymall>

**Cax online generator**



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RK1903-3AC00>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1903-3AC00>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3RK1903-3AC00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RK1903-3AC00&lang=en)

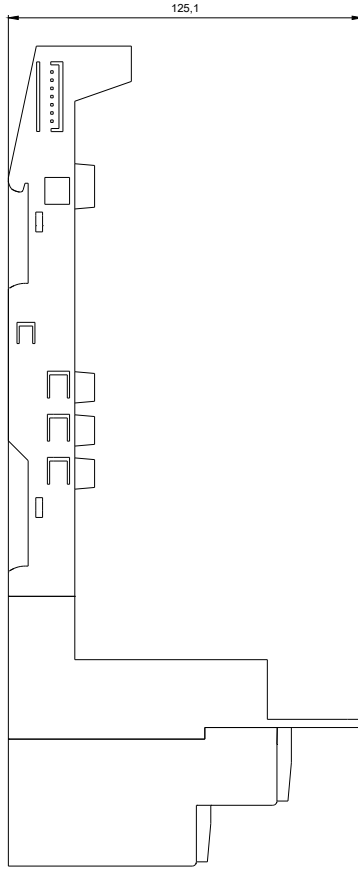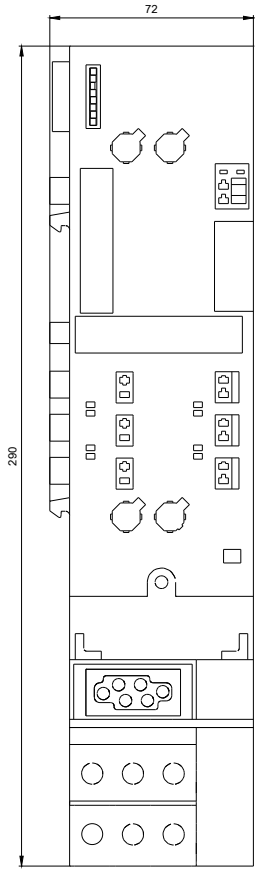

3RK1903-3AC00\_ALL

last modified:

09/13/2019