

TALON

Meter Mounting Equipment



Selection and Application Guide

Meter Mounting Equipment

For use in Southern Illinois,
Missouri and Kansas

www.talonmetering.com

Meter Mounting Equipment

Table of Contents

Service	Rating	Positions	Terminals	Page
Air Conditioning Disconnects	-	-	-	3
1 Phase, 3 Wire 600V AC	135A	1	4	4
1 Phase, 3 Wire 600V AC	200A	1	4 & 5	5
1 Phase, 3 Wire 600V AC, Side Wired	200A	1	4	6
1 Phase, 3 Wire 600V AC, Horizontal Gang	100	2-4	4	7
1 Phase, 3 Wire 600V AC, Horizontal Gang	200A	2-6	4	8
1 Phase, 3 Wire 600V AC, Lever Bypass	125/200A	1	4, 5 & 7	9
1 Phase, 4 Wire 600V AC	200A	1	7	10
1 Phase, 3 Wire 600V AC	320A	1	4, 5 & 7	11
1 Phase, 3 Wire 600V AC, 3 Phase, 4 Wire 600V AC, Lever Bypass	200A	2-6	5 & 7	12
1 Phase, 3 Wire 600V AC, Pedestal	200A	1	4	13
1 Phase, 3 Wire, 3 Phase, 4 Wire 600V AC, Lever Bypass	200/320A	1	4, 5 & 7	14
Transformer Rated No Bypass with Test Switch Provision	20A	1	6, 8 & 13	15
1 Phase, 3 Wire 300V AC, Type K-4	400A	1	4	16
3 Phase, 4 Wire 600V AC, Type K-7	400A	1	7	17
1 Phase, 3 wire 240V AC, Meter Main Combinations	100/320A	1	4 & 5	18
1 Phase, 3 wire 240V AC, Meter Load Center Combinations	100/320A	1	4 & 5	19
3 Phase, 4 Wire 600V AC, Lever Bypass, Single Position Meter Socket, 3 Phase, 4 Wire 240V AC, Cold Sequence Meter Main	200A	1	7	20
1 Phase, 3 Wire, 120/240V AC, Condominium Meter Paks	125 & 200A	2-6	4	21
1 Phase, 3 Wire, 120/240V AC, Condominium Meter Paks	125 & 200A	2-6	5	22
1 Phase, 3 Wire, 120/240V AC, Horn Bypass, Condominium Meter Paks	125 & 200A	2-6	5	23
Direct Burial Meter Pedestal	100-200	1	5	24
TL Series Temporary Power Outlet Panels	-	-	-	25-28
Circuit Breakers	-	-	-	29
Connector Lugs	-	-	-	30-31
Accessories	-	-	-	32
Spa Panels	-	-	-	33
Watt-hour Meter Forms	-	-	-	34
Energization of Electrical Equipment	-	-	-	35
Materials & Finishes	-	-	-	36
Utility Approval Reference	-	-	-	37-49

Represented by:

CBM, Inc.
 6220 Blue Ridge Cut-Off
 Suite 100
 Kansas City, MO 64133
 Telephone: 816-353-6011
 FAX: 816-353-7277

Air Conditioning Disconnects

Fused and Non-fused

Features:

Flexibility

- 30-60 amperes
- 240 volts A.C.
- Padlock provisions
- Horsepower rated
- 10,000 A.I.C.
- New models available with internal GFCI receptacle
- Removable door
- Ample wiring space

Rugged Durability

- Noryl® thermoplastic and powder coated G90 steel enclosures are corrosion resistant and extremely durable giving long maintenance free service
- Copper conductors
- Raised mounting embosses

Steel AC Disconnects

Ampere Rating	Disconnect Type	Catalog Number	Horse Power Rating	Dimensions (inches)		
				H	W	D
30	Fused pullout	LF2030	3	7.3	5.0	2.1
60	Fused pullout	LF2060	10	8.0	5.0	2.1
60	Non-fused pullout	LN2060	10	7.3	5.0	2.1
60	Non-automatic switch	LNAS2060	10	7.3	5.0	2.1



Plastic AC Disconnects

Ampere Rating	Disconnect Type	Catalog Number	Horse Power Rating	Dimensions (inches)		
				H	W	D
30	Fused pullout	LF2030PL	3	8.0	5.3	3.1
60	Fused pullout	LF2060PL	10	8.0	5.3	3.1
60	Non-fused pullout	LN2060PL	10	7.3	5.0	2.1
60	Non-fused pullout	LN2060PLX	10	8.0	6.0	5.8



Steel AC Disconnects with 15 Amp GFCI Receptacle

Ampere Rating	Disconnect Type	Catalog Number	Horse Power Rating	Dimensions (inches)		
				H	W	D
30	Fused pullout	LF2030GFCI	3	9.0	6.1	5.1
60	Fused pullout	LF2060GFCI	10	9.0	6.1	5.1
60	Non-fused pullout	LN2060GFCI	10	7.1	5.8	5.1
60	Non-automatic switch	LNAS2060GFCI	10	7.1	5.8	5.1



Wire Range Table

Connector	Copper		Aluminum	
	Solid	Stranded	Solid	Stranded
Line	#14-8	#14-3	#12-8	#12-3
Load	#14-8	#14-3	#12-8	#12-3
Neutral	#12-8	#12-2	#12-8	#12-2
Equip. grnd.	#12-8	#12-2	#12-8	#12-2



135A Meter Mounting Equipment

Ringless, 4 Jaw

135 Amp, Ringless, 4 Terminal for 1 Phase, 3 Wire 600V AC


Service	Catalog Number	No. of Terminals	Connectors	Bypass	Dimensions (inches)			Hub Provisions	Milbank Equivalent
					W	H	D		
O/U	UAT111-OG	4	#14-2/0	None	8.0	11.7	3.6	RX Opening	U7487-RL-TG U8435-RL-TG
O/U	UAT111-OMSP [®]	4	#14-2/0	Horn	8.0	11.7	3.6	RX Opening	N/A
O/U	UAT111-OPQG	4	#14-2/0	Horn	8.0	11.7	3.6	RX Opening	U7487-RL-QG-KK U7487-RL-TG-KK
O/U	UAT111-OPZA [®]	4	#14-2/0	None	8.0	11.7	3.6	RX Opening	U7487-RL-TG-KK-BL
O/U	UAT111-BPQG	4	#14-2/0	None	8.0	11.7	3.6	1.25" Hub Installed	U7487-YL-TG-KK U8750-YL-KK
O/U	UAT111-XMBL [®]	4	#14-2/0	None	8.0	11.7	3.6	1.25" Hub Installed	N/A

- ① Shield Installed
- ② 7/8" barrel lock KO with bracket installed
- ③ 7/16" barrel lock KO with bracket installed

All units are UL listed.
Hubs: Please see accessories on page 32.
5th Terminal: Order catalog number H659-0121 for 9 o'clock position.
Connectors: Aluminum connectors, tin plated.
Ground: Units supplied with a ground.



UAT111-OG

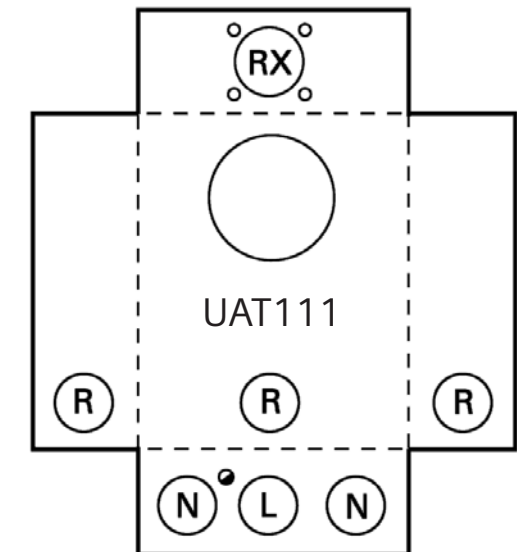

Knockouts (inches):	
Ø:	1/4
L:	1/2, 3/4, 1, 1-1/4, 1-1/2
N:	3/4, 1, 1-1/4, 1-1/2, 2
R:	1, 1-1/4, 1-1/2, 2
RX:	Ø2.750 HUB OP



200A Meter Mounting Equipment

Ringless, 4/5 Jaw

200 Amp, Ringless, 4/5 Terminal for 1 Phase, 3 Wire 600V AC

Service	Catalog Number	No. of Terminals	Connectors	Bypass	Dimensions (inches)			Hub Provisions	Milbank Equivalent
					W	H	D		
OH	UAT317-OG	4	#6-350 kcmil	None	8.0	14.8	4.5	RX Opening	U7021-RL-TG
OH	UAT317-OGF	4	#6-350 kcmil	None	8.0	14.8	4.5	RX Opening	N/A
OH	UAT317-OPCH	4	#6-350 kcmil	Horn	8.0	14.8	4.5	RX Opening	N/A
OH	UAT317-OPQG	4	#6-350 kcmil	Horn	8.0	14.8	4.5	RX Opening	U7021-RL-QG-KK U7021-RL-TG-KK
OH	UAT317-OMSP	4	#6-350 kcmil	Horn	8.0	14.8	4.5	RX Opening	N/A
OH	UAT317-DPQG	4	#6-350 kcmil	Horn	8.0	14.8	4.5	2" Hub Installed	U7021-DL-TG-KK
UG	UAT417-PG	4	#6-350 kcmil	None	11.0	14.8	4.5	Blank Top	U7040-O-TG
O/U	UAT417-XG	4	#6-350 kcmil	None	11.0	14.8	4.5	RX Cl. Plate	U1527-XL U7040-XL-TG
O/U	UAT417-OPQG	4	#6-350 kcmil	Horn	11.0	14.8	4.5	RX Opening	U7040-RL-TG-KK
O/U	UAT417-PPQG	4	#6-350 kcmil	Horn	11.0	14.8	4.5	Blank Top	U7040-O-TG-KK
O/U	UAT417-XPQG	4	#6-350 kcmil	Horn	11.0	14.8	4.5	RX Cl. Plate	U7040-XL-TG-KK
O/U	UAT417-XVZ	5	#6-350 kcmil	Horn	11.0	14.0	4.5	RX Cl. Plate	U7043-XL-KK-IL-5T9W
O/U	UAT317-0FP	5	#6-350 kcmil	Horn	8.0	14.8	4.5	RX Opening	N/A
O/U	UAT317-0PGP	4	#6-350 kcmil	Horn	8.0	14.8	4.5	RX Opening	N/A
OH	UAT317-DVZ	5	#6-350 kcmil	Horn	8.0	14.8	4.5	2" Hub Installed	N/A

All units are UL listed.
 Hubs: Please see accessories on page 32.
 5th Terminal: Order catalog number H659-0121 for 9 o'clock position.
 Connectors: Aluminum connectors, tin plated.
 Ground: Units supplied with a quad ground.

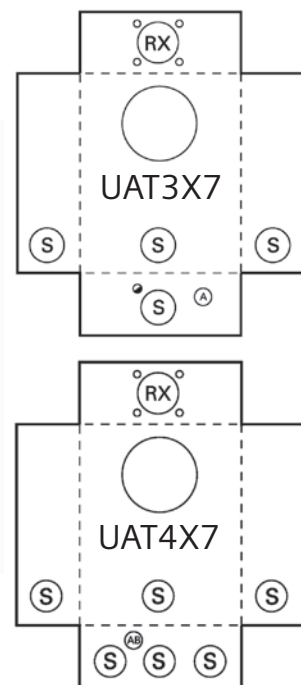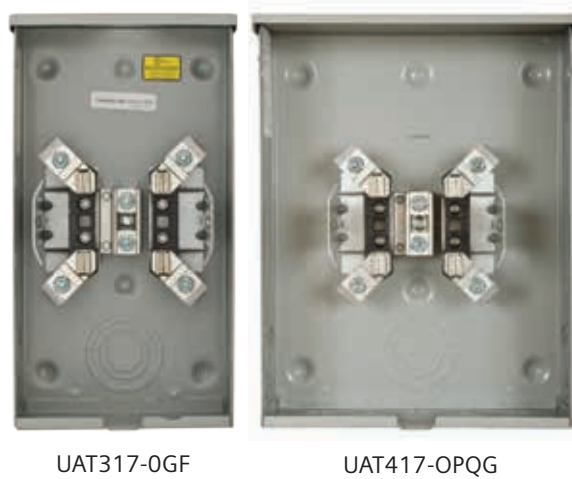

Knockouts (inches):	
Ø:	1/4
A:	1/2
S:	1, 1-1/4, 1-1/2, 2, 2-1/2
AB:	1/4, 1/2, 7/8
RX:	Ø2.750 HUB OP



200A Meter Mounting Equipment

Ringless, Side Wired, 4 Jaw

200 Amp, Ringless, Side Wired, 4 Terminal for 1 Phase, 3 Wire 600V AC


Service	Catalog Number	No. of Terminals	Connectors	Bypass	Dimensions (inches)			Meter Opening	Milbank Equivalent
					W	H	D		
UG	UAS877-PPGP ①	4	#6-350 kcmil	Horn	13.0	14.0	4.5	Right	U1980-O-KK-BLG
UG	UAS877-PPZA ②	4	#6-350 kcmil	Horn	13.0	14.0	4.5	Right	U1980-O-KK-BL U1980-O-KK-AEP

① 7/8" barrel lock KO with bracket installed.
 ② 7/16" barrel lock KO with bracket installed.


All units are UL listed.
 Hubs: Please see accessories on page 32.
 5th Terminal: Order catalog number H659-0121 for 9 o'clock position.
 Connectors: Aluminum connectors, tin plated.
 Ground: Units supplied with a ground.



UAS817-PPZA

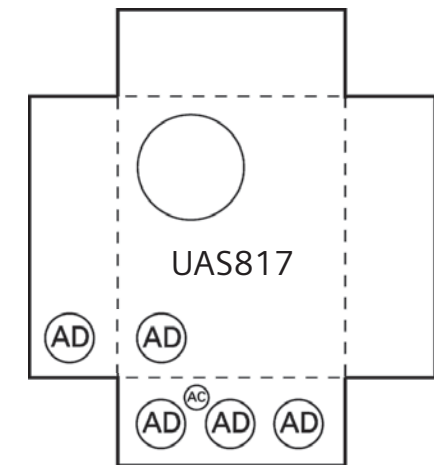

UAS877-PPZA

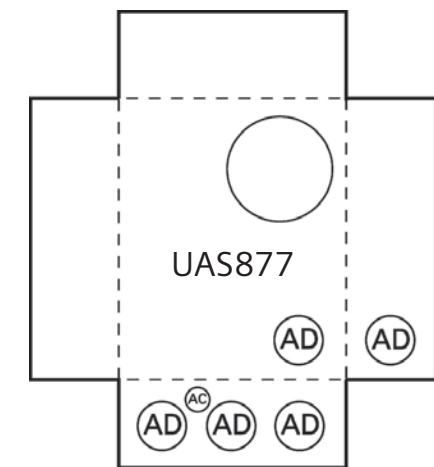

Knockouts (inches):	
AC:	1/4, 1/2
AD:	1-1/4, 1-1/2, 2, 2-1/2, 3

100A Position Meter Mounting Equipment


Ringless Horizontal, 4 Jaw

100 Amp Position, Ringless, Horizontal Multi-Position 4/5 Jaw for 1 Phase, 3 wire 600V AC


No. of Pos	Catalog Number	No. of Terminals	Connectors			Dimensions (in.)	Service	Overall Amperage	Hub Provisions	Milbank Equivalent
			Line	Load	Bypass					
2	UA2311-OP	4	#6-350 kcmil	#14-2/0	Horn	24.0 12.0 4.5	O/U	100	RX Opening	N/A
2	UA2311-OPQG ①	4	#6-350 kcmil	#14-2/0	Horn	24.0 12.0 4.5	O/U	100	RX Opening	U8032-XL-KK
3	UA3311-OPQG ①	4	#6-350 kcmil	#14-2/0	Horn	32.0 12.0 4.5	O/U	100	RX Opening	U8033-XL-KK
4	UA4311-OPQG ①	4	#6-350 kcmil	#14-2/0	Horn	40.0 12.0 4.5	O/U	100	RX Opening	U8034-XL-KK
2	UA2311-OPZA ②	4	#6-350 kcmil	#4-2/0	Horn	24.0 12.0 4.5	O/U	100	RX Opening	U8032-RL-TG-KK-BL
3	UA3311-OPZA ②	4	#6-350 kcmil	#4-2/0	Horn	32.0 12.0 4.5	O/U	100	RX Opening	U8033-RL-TG-KK-BL
4	UA4311-OPZA ②	4	#6-350 kcmil	#4-2/0	Horn	40.0 12.0 4.5	O/U	100	RX Opening	U8034-RL-TG-KK-BL
2	UA2311-XBBU	4	#6-350 kcmil	#14-2/0	Horn	24.0 12.0 4.5	O/U	100	RX Cl. Plate	U1282-XL-KK-BLG
3	UA3311-XBBU	4	#6-350 kcmil	#14-2/0	Horn	32.0 12.0 4.5	O/U	100	RX Cl. Plate	U1283-XL-KK-BLG
4	UA4311-XBBU	4	#6-350 kcmil	#14-2/0	Horn	40.0 12.0 4.5	O/U	100	RX Cl. Plate	U1284-XL-KK-BLG

- ① Sockets with "QG" suffix have 2 ground lugs.
- ② 7/16" barrel lock KO with bracket installed.

All units are UL listed.
 Hubs: Please see accessories on page 32.
 5th Terminal: Order catalog number H659-0121 for 9 o'clock position.
 Connectors: Aluminum connectors, tin plated.
 Ground: Units supplied with a ground.

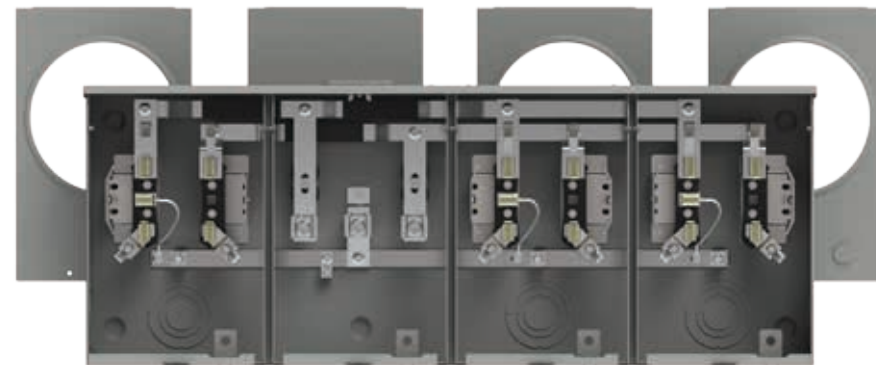

UA3311-XBBU

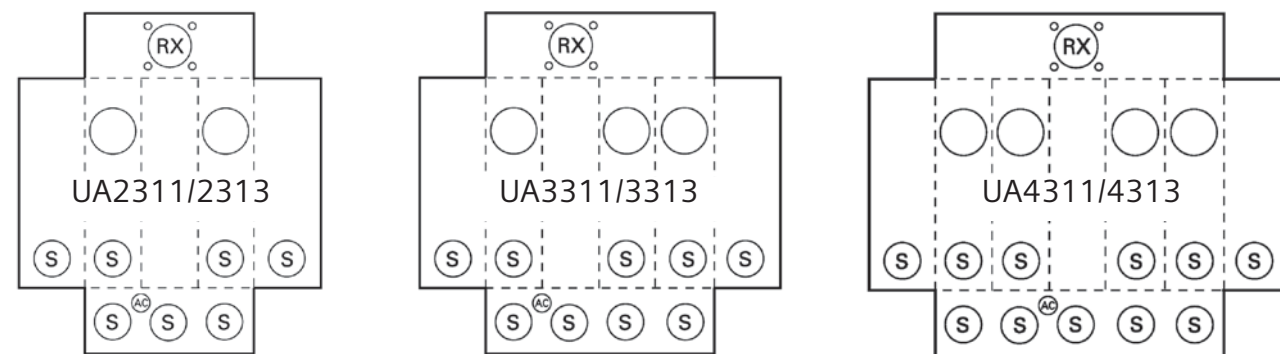

Knockouts (inches):	
S:	1, 1-1/4, 1-1/2, 2, 2-1/2
AC:	1/4, 1/2
RX:	Ø2.750 HUB OP

200A/Position Meter Mounting Equipment

Ringless Horizontal, 4 Jaw



200 Amp / Position, Ringless, Horizontal Multi-Position 4 Jaw for 1 Phase, 3 wire 600V AC

No. of Pos	Catalog Number	No. of Terminals	Connectors			Dimensions (in.)	Service	Overall Amperage	Hub Provisions	Milbank Equivalent
			Line	Load	Bypass					
2	UA2716-YG	4	#6-350 kcmil	#6-350 kcmil	None	24.0 14.5 5.1	O/U	200	HD Opening	N/A
2	UA2717-YPQG ①	4	#1/0-600 kcmil	#6-350 kcmil	Horn	24.0 14.5 5.1	O/U	200	HD Opening	U1252-RRL-KK-K1 U1252-R-TG-KK
2	UA2717-YPZA	4	#1/0-600 kcmil	#6-350 kcmil	Horn	24.0 14.5 5.1	O/U	200	HD Opening	U1252-R-TG-KK-BL U1252-X-KK-K3-BL
3	UA3717-YPQG ①	4	#1/0-600 kcmil	#6-350 kcmil	Horn	32.0 14.5 5.1	O/U	270	HD Opening	U1253-RRL-KK-K1 U1253-R-TG-KK
3	UA3717-YPZA	4	#1/0-600 kcmil	#6-350 kcmil	Horn	32.0 14.5 5.1	O/U	270	HD Opening	U1253-R-TG-KK-BL U1253-X-KK-K3-BL
4	UA4719-YPQG ①	4	(2) #1/0-600 kcmil	#6-350 kcmil	Horn	43.0 14.5 5.1	O/U	360	HD Opening	U1254-R-TG-KK
4	UA4719-YPZA	4	(2) #1/0-600 kcmil	#6-350 kcmil	Horn	43.0 14.5 5.1	O/U	360	HD Opening	U1254-R-TG-KK-BL U1254-X-KK-K3-BL
5	UA5719-KPQG ①	4	(2) #1/0-600 kcmil	#6-350 kcmil	Horn	51.0 14.5 5.1	O/U	450	HD Opening	U1255-R-TG-KK
5	UA5719-KPZA	4	(2) #1/0-600 kcmil	#6-350 kcmil	Horn	51.0 14.5 5.1	O/U	450	(2) HD Opening	U1255-R-TG-KK-BL U1255-X-KK-K3-BL
6	UA6719-KPZA	4	(2) #1/0-600 kcmil	#6-350 kcmil	Horn	59.0 14.5 5.1	O/U	528	(2) HD Opening	U1256-R-TG-KK-BL U1256-X-KK-K3-BL

- ① Sockets with "QG" suffix have 2 ground lugs.
- All units are UL listed.
- Hubs: Please see accessories on page 32.
- 5th Terminal: Order catalog number H659-0121 for 9 o'clock position.
- Connectors: Aluminum connectors, tin plated.
- Ground: Units supplied with a ground.



UA2716-YG

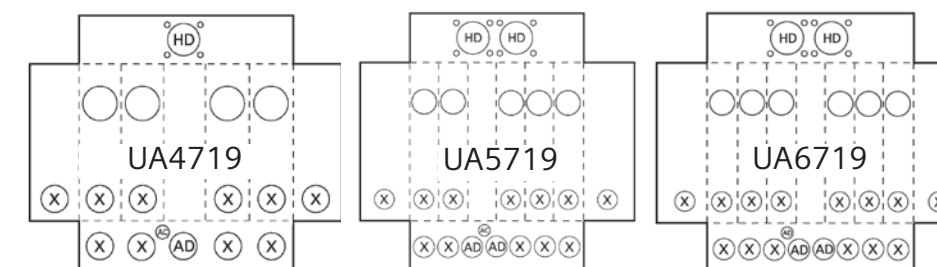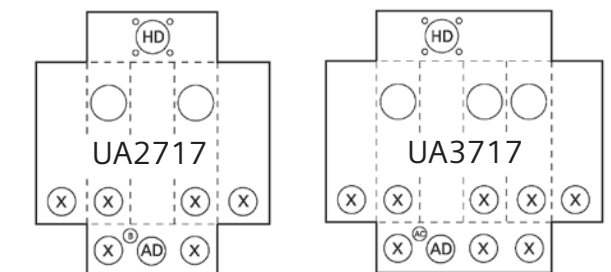

Knockouts (inches):	
B:	1/2, 3/4
X:	1-1/4, 1-1/2, 2, 2-1/2
AC:	1/4, 1/2
AD:	1-1/4, 1-1/2, 2, 2-1/2, 3
HD:	Ø4.281 HUB OP

125/200A Meter Mounting Equipment

Ringless, 4, 5 & 7 Jaw, Lever Bypass

125 Amp Ringless, 5 Terminal for 1 Phase, 3 Wire 600V AC

Service	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (inches)			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
OH	42305-02MR	5	#6-350 kcmil	#6-350 kcmil	Lever	10.0	18.5	5.2	RX Opening	U6193-RL-QG-AMS
OH	42395-02MR	5	#6-350 kcmil	#6-350 kcmil	Lever	10.0	18.5	5.2	1.25" Hub Inst.	U6193-YL-QG-AMS

200 Amp Ringless, 4 Terminal for 1 Phase, 3 Wire 600V AC

Service	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (inches)			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
O/U	40404-025	4	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.0	RX Cl. Plate	N/A
O/U	40404-02QG ①	4	#6-350 kcmil	#6-350kcmil	Lever	10.0	17.0	5.2	RX Cl. Plate	U9801-RXL-QG U9800-RRL-QG
OH	40804-01QG ①	4	#6-350 kcmil	#6-350kcmil	Lever	10.0	17.5	5.2	RX Opening	U9800-RRL

① Sockets with "QG" suffix have 2 ground lugs.

200 Amp Ringless, 5 Terminal for 1/3 Phase, 3 Wire 600V AC

Service	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (inches)			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
OH	40005-01①	5	#6-350 kcmil	#6-350 kcmil	Lever	10.0	18.0	5.0	RX Opening	N/A
OH	40005-01F ④	5	#6-350 kcmil	#6-350 kcmil	Lever	10.0	18.0	5.0	RX Opening	N/A
OH	40005-01QG ②③	5	#6-350 kcmil	#6-350 kcmil	Lever	10.0	17.5	5.0	RX Opening	U9550-RL-QG
O/U	40405-025	5	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.0	RX Cl. Plate	N/A
O/U	40405-02CO ⑥	5	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.0	RX Cl. Plate	U4451-RXL-5T9
O/U	40405-02MR	5	#6-350 kcmil	#6-350 kcmil	Lever	12.8	19.1	5.0	RX Cl. Plate	U9551-RXL-QG-AMS
O/U	40405-02QG ②③	5	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.0	RX Cl. Plate	U9581-RL-QG-AEP
OH	41005-01F ④	5	#6-350 kcmil	#6-350 kcmil	Lever	10.0	17.5	5.0	RX Opening	U9550-RL-TG-5T9-HSP
O/U	41405-02MR	5	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.0	HD Cl. Plate	UAP9551-XL-QG-HSP UAP9581-XL-QG
OH	42405-01MR	5	#6-350 kcmil	#6-350 kcmil	Lever	10.0	18.5	5.0	RX Opening	U9550-RRL-QG-AMS
OH	42425-02MR	5	#6-350 kcmil	#6-350 kcmil	Lever	10.0	18.5	5.0	2" Hub Installed	U9550-RDL-QG-AMS
O/U	42705-02MR ①	5	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.0	RX Cl. Plate	U9581-RXL-QG-AMS
O/U	44305-02MR	5	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.0	RX Cl. Plate	U9551-RXL-QG-AMS
O/U	48805-0BNU	5	#6-350 kcmil	#6-350 kcmil	Lever	16.0	22.0	5.0	RX Cl. Plate	N/A
O/U	9804-8592 ⑦	5	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.0	RX Cl. Plate	U9581-RXL-QG

- ① Approved for 3 phase 3 wire application.
- ② Devices have 5th terminal in the 6 o'clock position.
- ③ Neutral can be isolated by removing the ground strap.
- ④ Devices have 5th Terminal in the 9 o'clock position and are not for use with 3 phase, 3 wire service.
- ⑤ 7/8" barrel lock KO with bracket included.
- ⑥ Some devices may be rated for only 1 phase, 3 wire. See appropriate footnotes for details.


All units are UL listed.
 Hubs: Please see accessories on page 32.
 5th Terminal: Please see accessories on page 32.
 Connectors: Aluminum connectors, tin plated.
 Bypass: Jaw clamping lever bypass, type HQ.
 Ground: Units supplied with a ground.



42305-02MR



42705-02MR

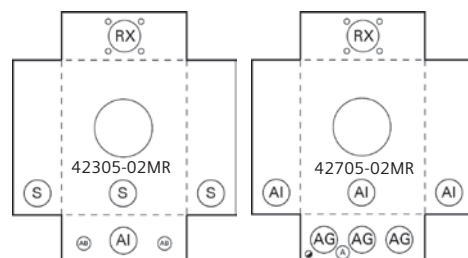

Knockouts (inches):	
●	1/4
A:	1/2
AB:	1/2, 3/4
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3
AI:	1, 1-1/4, 1-1/2, 2, 2-1/2, 3
S:	1, 1-1/4, 1-1/2, 2, 2-1/2
RX:	∅2.750 HUB OP

200A Meter Mounting Equipment

Ringless 7 Jaw


200 Amp Ringless, 7 Terminal for 3 Phase, 4 Wire 600V AC

Service	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (inches)			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
OH	42407-01MR	7	#6-350 kcmil	#6-350 kcmil	Lever	10	18.5	5.2	RX Opening	U9700-RRL-QG-AMS
O/U	44307-02MR	7	#6-350 kcmil	#6-350 kcmil	Lever	13	19	5.2	RX Cl. Plate	U9701-RXL-QG-AMS
OH	40007-01	7	#6-350 kcmil	#6-350 kcmil	Lever	10.0	17.5	5.2	RX Opening	U9700-RRL
OH	40007-01QG ①	7	#6-350 kcmil	#6-350 kcmil	Lever	10.0	17.5	5.2	RX Opening	U9700-RRL
O/U	40407-01NU ②	7	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Opening	U9701-RXL
O/U	40407-015	7	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.5	RX Opening	N/A
O/U	40407-025	7	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	U4701-RL U4701-RRL U9701-XL-TG U4701-RXL U9701-RRL U9701-RXL
O/U	40407-0250	7	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	N/A
O/U	40407-02CH	7	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	6.0	RX Cl. Plate	U8606-RXL
O/U	40407-02CO ③④	7	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	U4701-XL
O/U	40407-02QG ①	7	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	U4701-RL-TG U9701-XL-TG-QG U9701-RXL-QG U9701-X-QG-AEP
O/U	48807-02NU	7	#6-350 kcmil	#6-350 kcmil	Lever	16.0	22.0	5.2	RX Cl. Plate	N/A
OH	40607-025	7	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	U8107-XLIL
O/U	40607-02BU ⑤	7	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	U7423-RXL

All units are UL listed.
 Hubs: Please see accessories on page 32.
 5th Terminal: Please see accessories on page 32.
 Connectors: Aluminum connectors, tin plated.
 Bypass: Jaw clamping lever bypass, type HQ.
 Ground: Units supplied with a ground.



44307-02MR

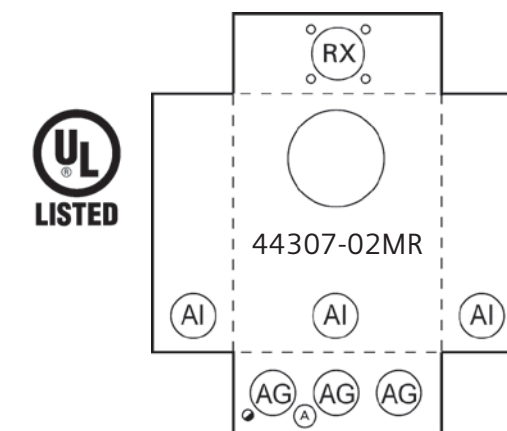

Knockouts (inches):	
●	1/4
A:	1/2
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3
AI:	1, 1-1/4, 1-1/2, 2, 2-1/2, 3
RX:	∅2.750 HUB OP

320A (400A Max) Meter Mounting Equipment

Ringless, 4,5, & 7 Jaw, Lever Bypass

320 Amp Ringless (400 Amp Max), 4 Terminal for 1 Phase, 3 Wire 600V AC

Service ①	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
O/U	47604-82	4	#4-600 kcmil	#4-600 kcmil	Lever	13.0	28.0	5.0	HD Cl. Plate	U4363-X-QG-K3-K2 U1779-R-K3-BLG U1079-X-K3-K2
O/U (SW)	48004-82	4	#4-600 kcmil	(2) #4-350 kcmil	Lever	16.0	31.0	5.0	HD Cl. Plate	U3000-O-2/K3L-BL U3000-O-2/K3L
O/U (SW)	48104-02	4	3/8"-24 stud	3/8"-24 stud	Lever	16.0	31.0	5.0	HD Cl. Plate	U1797-X-TG U2448-X U4702-X-TG U4363-R U4905-X
O/U (SW)	48104-82WI ②	4	3/8"-24 stud	3/8"-24 stud	Lever	16.0	31.0	5.0	HD Opening	U4257-X-2/K2
O/U (SW)	48704-82GP ③	4	#4-600 kcmil	#4-600 kcmil	Lever	20.0	34.0	6.0	HD Cl. Plate	U4912-X-K3-BLG
O/U	47604-02QG	4	3/8"-24 stud	3/8"-24 stud	Lever	13.0	28.0	5.0	HD Cl. Plate	U1079-R


320 Amp Ringless (400 Amp Max), 5 Terminal for 1 Phase, 3 Wire 600V AC

Service ①	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
O/U	42805-42MR	5	(2) #4-350 kcmil	(2) #6-350 kcmil	Lever	17.8	38.8	6.7	HD Cl. Plate	U5786-X-K3-K2-5T6-BL-AMS
O/U	43005-42MR	5	#4-600 kcmil (2) #1/0-250 kcmil	(2) #6-350 kcmil	Lever	16.2	33.3	5.2	HD Cl. Plate	U5740-X-K3L-K2L-5T6-AMS
OH	47605-82MR	5	#4-600 kcmil (2) #1/0-250 kcmil	(2) #6-350 kcmil	Lever	12.8	28.0	5.0	HD Cl. Plate	U4363-X-QG-K3-K2-5T6-AMS U1079-X-QG-K3-K2-5T6-AMS
O/U	49905-026	5	1/2" - 20 stud	1/2" - 20 stud	Lever	20.0	36.0	6.2	HD Cl. Plate	N/A

320 Amp Ringless (400 Amp Max), 7 Terminal for 3 Phase, 4 Wire 600V AC

Service ①	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
O/U	9804-9109	7	#6-350 kcmil	#6-350 kcmil	Lever	20.0	34.0	6.2	RX Cl. Plate	N/A
O/U (SW)	44707-02PP	7	3/8-800 kcmil	1/2"-20 stud	Lever	20.0	34.0	6.0	HD Cl. Plate	U4168-X-K7-BLG
O/U (SW)	48707-82	7	(2) #4-350 kcmil	(2) #6-250 kcmil	Lever	20.0	34.0	6.0	HD Cl. Plate	N/A
O/U	42807-02MR	7	1/2"-20 stud	1/2"-20 stud	Lever	17.8	38.8	6.7	HD Cl. Plate	U4911-X-QG-BL-AMS
O/U (SW)	44707-02	7	1/2"-20 stud	1/2"-20 stud	Lever	20.0	34.0	6.0	HD Cl. Plate	N/A
O/U (SW)	48707-02	7	3/8"-24 stud	3/8"-24 stud	Lever	20.0	34.0	6.0	HD Cl. Plate	U2594-X
O/U (SW)	48707-029 ④	7	3/8"-24 stud	3/8"-24 stud	Lever	20.0	34.0	6.0	HD Cl. Plate	U2594-X-BLG
O/U	49007-02FL	7	1/2"-20 stud	1/2"-20 stud	Lever	20.0	34.0	6.0	HD Cl. Plate	N/A
O/U	49807-026	7	3/8"-24 stud	3/8"-24 stud	Lever	20.0	39.0	6.0	HD Cl. Plate	N/A

- ① Includes anti-inversion clip H59676.
- ② 7/8" barrel lock KO with bracket included.
- ③ SW represents an offset design. Meter socket is on the right.
- ④ 7/16" barrel lock KO with bracket included.

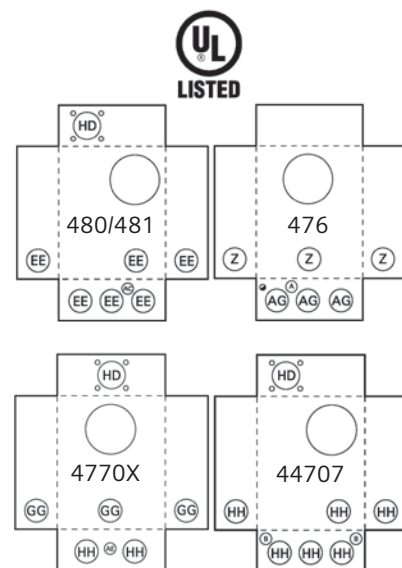

All units are UL listed.
Hubs: Please see accessories on page 32.
5th Terminal: Please see accessories on page 32.
Connectors: Aluminum connectors, tin plated.
Bypass: Jaw clamping lever bypass, type HQ.
Ground: Units supplied with a ground.

Knockouts (inches):	
●:	1/4
A:	1/2
B:	1/2, 3/4
Z:	1-1/2, 2, 2-1/2
EE:	2, 2-1/2, 3
GG:	2-1/2, 3, 3-1/2
HH:	2-1/2, 3, 3-1/2, 4
AC:	1/4, 1/2
AE:	1/4, 1/2, 3/4, 1, 1-1/4
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3
HD:	Ø4.281 HUB OP

200A/Position Meter Mounting Equipment

Ringless, Horizontal 5 & 7 Jaw, Lever Bypass

200 Amp / Position Ringless Horizontal Multi-Position, 5 Terminal for 1 Phase, 3 wire 600V AC

No. of Pos	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (in.)			Service	Overall Amperage	Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D				
2	404052-023NU ①	5	1/0-500 kcmil	#6-350 kcmil	Lever	32.8	23.2	6.0	O/U	250	HD Cl. Plate	U2872-XT-5T9
3	404053-023NU ①	5	1/0-500 kcmil	#6-350 kcmil	Lever	43.9	23.2	6.0	O/U	250	HD Cl. Plate	U2873-XT-5T9
4	404054-223NU ①	5	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	61.0	23.2	6.0	O/U	300	(2) HD Cl. Plates	U2874-XT-5T9
5	404055-223NU ①	5	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	72.1	23.2	6.0	O/U	300	(2) HD Cl. Plates	U2875-XT-5T9
6	404056-223NU ①	5	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	83.2	23.2	6.0	O/U	410	(2) HD Cl. Plates	U2876-XT-5T9

① 7/16" barrel lock KO with bracket included.

200 Amp / Position Ringless Horizontal Multi-Position, 7 Terminal for 3 Phase, 4 wire 600V AC


No. of Pos	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (in.)			Service	Overall Amperage	Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D				
2	404072-023NU ①	7	1/0-500 kcmil	#6-350 kcmil	Lever	32.8	23.2	6.0	O/U	250	HD Cl. Plate	U2732-XT
3	404073-023NU ①	7	1/0-500 kcmil	#6-350 kcmil	Lever	43.8	23.2	6.0	O/U	250	HD Cl. Plate	U2733-XT
4	404074-223NU ①	7	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	61.0	23.2	6.0	O/U	300	(2) HD Cl. Plates	U2734-XT
5	404075-223NU ①	7	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	72.1	23.2	6.0	O/U	300	(2) HD Cl. Plates	U2735-XT
6	404076-223NU ①	7	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	83.2	23.2	6.0	O/U	410	(2) HD Cl. Plates	U2736-XT

① 7/16" barrel lock KO with bracket included.


All units are UL listed.
Hubs: Please see accessories on page 32.
5th Terminal: Please see accessories on page 32.
Connectors: Aluminum connectors, tin plated.
Bypass: Jaw clamping lever bypass, type HQ.
Ground: Units supplied with a ground.



404052-023NU

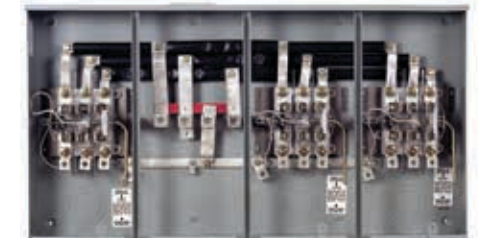

404073-023NU

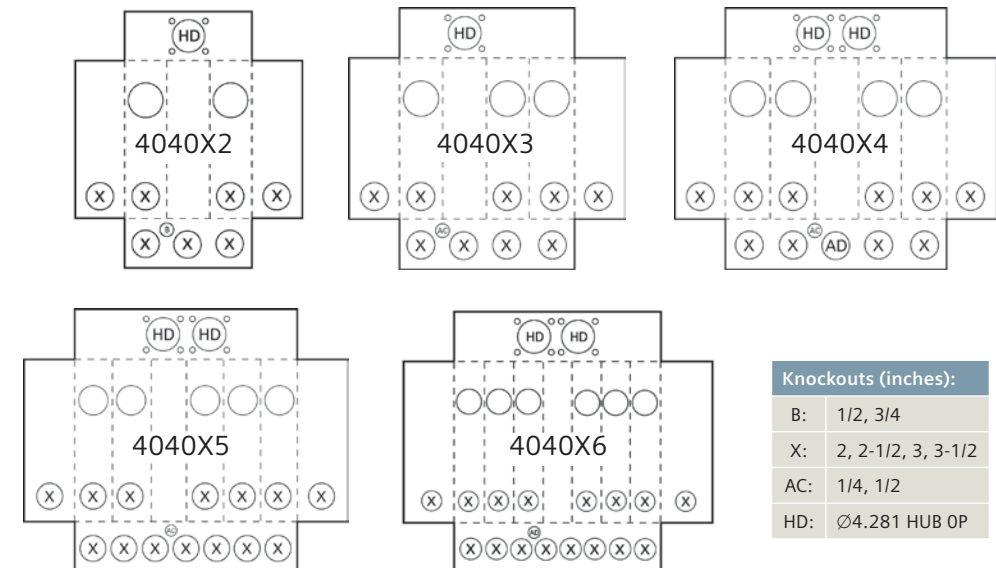

Knockouts (inches):	
B:	1/2, 3/4
X:	2, 2-1/2, 3, 3-1/2
AC:	1/4, 1/2
HD:	Ø4.281 HUB OP

200A Meter Mounting Equipment, Pedestal Ringless, 4 Jaw

200 Amp, Ringless, Direct Burial Meter Pedestal 4 Terminal for 1 Phase, 3 wire 600V AC

Service	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (inches)			Main Breaker	Milbank Equivalent
			Line	Load		W	H	D		
UG	UAP317-PPCH	4	4/0-comp. lug	#6-350 kcmil	Horn	8.0	64.5	4.5	None	U8436-O
UG	UAP317-PPWI	4	#6-350 kcmil	#6-350 kcmil	Horn	8.0	64.5	4.5	None	U3358-O-KK
UG	UAPB317-PPCH [Ⓞ]	4	4/0-comp. lug	See breaker rating	Horn	8.0	64.5	4.5	200A provision	NU8980-O-KK-LP

Ⓞ Provision for a 100-200 amp circuit breaker. See breaker table for details.
 All units are UL listed.
 Hubs: Please see accessories on page 32.
 5th Terminal: order catalog number H659-0121 for 9 o'clock position
 Connectors: Aluminum connectors, tin plated
 Ground: units supplied with a ground.

Breaker Table

Amps	Circuit Breaker
100	L2100
125	L2125
150	LN2150R
200	LN2200R

Accessories


Item	Catalog Number
Bottom plate for free standing installation	5007714
Extension Kit	5007718



UAPB317-PPCH
(for use with main breaker)



UAP317-PPCH

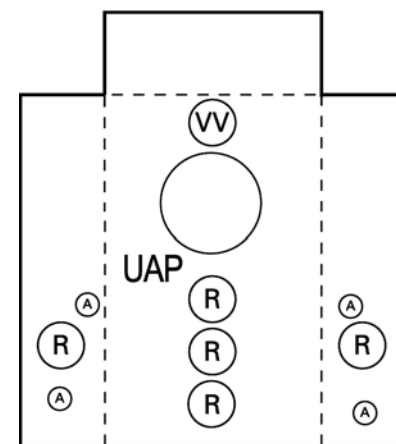

Knockouts (inches):	
A:	1/2
R:	1, 1-1/4, 1-1/2, 2
VV:	2

200/320A Meter Mounting Equipment Ringless, 4, 5 & 7 Jaw, Lever Bypass

200 Amp, Ringless, Direct Burial Meter Pedestal 5 Terminal for 1 Phase, 3 Wire or 7 Terminal for 3 Phase, 4 Wire 600V AC

Service	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (inches)			Main Breaker	Milbank Equivalent
			Line	Load		W	H	D		
UG	40405P-9WI	5	#6-350 kcmil	#6-350 kcmil	Lever	11.0	56.0	6.0	None	U9108-O
UG	40407P-9WI	7	#6-350 kcmil	#6-350 kcmil	Lever	11.0	56.0	6.0	None	U9107-O
UG	40407P-9CH	7	3/8"-24 stud	#6-350 kcmil	Lever	11.0	56.0	6.0	None	U9107-O

320 Amp (400 Amp Max), Ringless, Direct Burial Meter Pedestal 4 Terminal for 1 Phase, 3 Wire 600V AC

Service	Catalog Number	# of Terminals	Connectors		Bypass	Dimensions (inches)			Main Breaker	Milbank Equivalent
			Line	Load		W	H	D		
UG	47604PB-9CH	4	3/8"-24 stud	#6-350 kcmil	Lever	13.0	56.0	5.0	(2) 200A QJ Inst.	U3849-O-2/200
UG	47604P-9WI	4	(2)#4-350 kcmil	(2)#4-350 kcmil	Lever	13.0	56.0	5.0	None	U1748-O-WI

All units are UL listed.
 Hubs: Please see accessories on page 32.
 5th Terminal: Please see accessories on page 32.
 Connectors: Aluminum connectors, tin plated.
 Bypass: Jaw clamping lever bypass, type HQ.
 Ground: Units supplied with a ground.

Accessories

Item	Catalog Number
Extension kit for 200 Amp	5007720
Extension kit for 320 Amp	5007719




47604P-9CH



47604PB-9CH



40407P-9CH

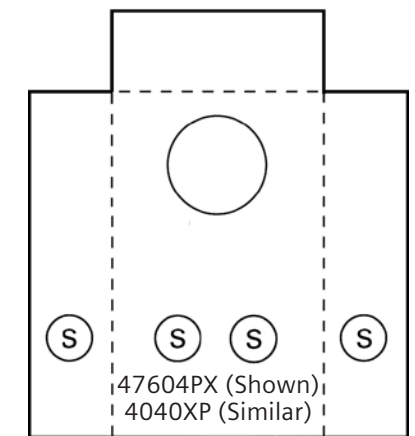


Knockouts (inches):	
S:	1, 1-1/4, 1-1/2, 2, 2-1/2

Transformer-Rated Meter Mounting Equipment with Test Switch Provision

20 Amp Transformer Rated Heavy Duty Lever Bypass Pre-Wired with Test Switch

Service	Catalog Number	No. of Terminals	Terminal Wire Range		Bypass	Dimensions (inches)			Hub Provisions	Milbank Equivalent	Test Switch
			Current	Potential		W	H	D			
O/U	9837-0914	8	#4-14	#8-14	Lever	20.0	12.0	4.5	1" Hub Inst.	U4496-XL-WC-41-AMS	7 Pole Inst.
O/U	9837-0915	13	#4-14	#8-14	Lever	20.0	12.0	4.5	1" Hub Inst.	U4497-XL-WC-61-AMS	10 Pole Inst.
O/U	9837-0934	6	#4-14	#8-14	None	20.0	12.0	4.5	RX Cl. Plate	N/A	6 Pole Inst.
O/U	9837-0935	6	#4-14	#8-14	None	20.0	12.0	4.5	RX Cl. Plate	N/A	4 Pole Inst.
O/U	9837-8201	6	#4-14	#8-14	None	20.0	12.0	4.5	RX Cl. Plate	N/A	Provision
O/U	9837-8501	13	#4-14	#8-14	None	20.0	12.0	4.5	RX Cl. Plate	N/A	Provision
O/U	9837-0354	13	#4-14	#8-14	None	20.0	12.0	4.5	1" Hub Inst.	N/A	10 Pole Inst.
O/U	9837-0930	8	#4-14	#8-14	None	20.0	12.0	4.5	RX Opening	N/A	7 Pole Inst.
O/U	9837-0931	8	#4-14	#8-14	None	20.0	12.0	4.5	RX Opening	N/A	10 Pole Inst.
O/U	9837-0932	13	#4-14	#8-14	None	20.0	12.0	4.5	RX Opening	N/A	10 Pole Inst.
O/U	9837-0933	13	#4-15	#8-14	None	20.0	12.0	4.5	RX Cl. Plate	N/A	10 Pole Inst.
O/U	9837-8403	8	#4-14	#8-14	None	20.0	12.0	4.5	RX Cl. Plate	N/A	Provision
O/U	9837-8503	13	#4-14	#8-14	None	20.0	12.0	4.5	RX Cl. Plate	N/A	Provision


All units are UL listed.
 Hubs: Please see accessories on page 32.
 Connectors: Aluminum connectors, tin plated.
 Ground: Units supplied with a ground.

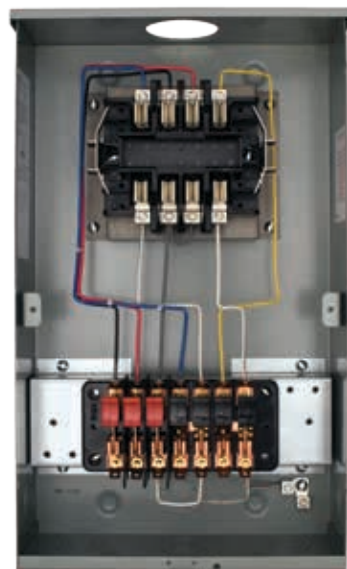

9837-0930



9837-0932

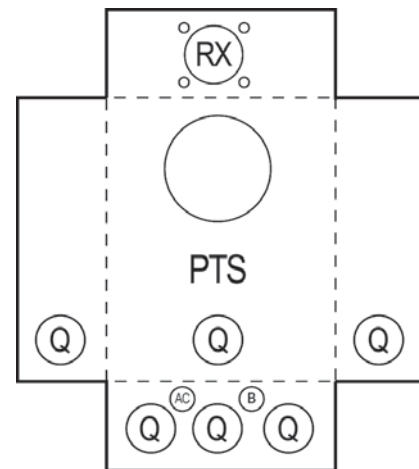

Knockouts (inches):	
B:	1/2, 3/4
Q:	1, 1-1/4, 1-1/2
AC:	1/4, 1/2
RX:	Ø2.750 HUB OP

400A Meter Mounting Equipment Ringless, Type K4, 4 Jaw


400 Amp, Ringless (400 Amp Max), 4 Jaw for 1 Phase, 3 Wire 300V AC

Type	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (in.)			Service	Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D			
K4UT	9810-8502	4	(2) #6-350 kcmil	(2) #6-350 kcmil	H56495	18.0	36.0	6.1	O/U	HD Cl. Plate	U4664-X-8502
K4UT	9810-8523	4	1/2"-20 stud	1/2"-20 stud	H56495	18.0	36.0	6.1	O/U	HD Cl. Plate	U4664-X-8523

All units are UL listed.
 Hubs: Please see accessories on page 32.
 Connectors: Aluminum connectors, tin plated, appropriate Talon lugs must be used.
 Optional manual bypass H56495 available, normally for utility use only. 2 required.
 Ground: Units supplied with a ground.




9810-8502

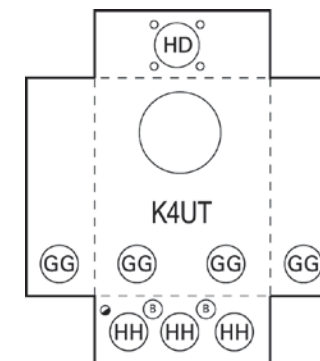


Knockouts (inches):	
Ø:	1/4
B:	1-1/2, 2, 2-1/2
AE:	1/4, 1/2, 3/4, 1, 1-1/4
GG:	2-1/2, 3, 3-1/2
HH:	2-1/2, 3, 3-1/2, 4
HD:	Ø4.281 HUB OP


Bolt-in Meter Type K-4




OVERHEAD Parallel Conductor
 2- H58853
 2- H56425
 1- H56732




OVERHEAD Single Conductor Line Parallel Conductor Load
 2- H58852
 2- H56425
 1- H56476
 1- H56732




OVERHEAD Single Conductor
 4- H58852
 2- H56476



UNDERGROUND Parallel Conductor
 2- H58853
 2- H56738
 1- H56426



UNDERGROUND Single Conductor Line Parallel Conductor Load
 2- H58852
 2- H56425
 1- H56476
 1- H56732



UNDERGROUND Single Conductor
 4- H58852
 2- H56476

400A Meter Mounting Equipment

Ringless, Type K-7, 7 Jaw


400 Amp Ringless (400 Amp Max), 7 Terminal for 3 Phase, 4 Wire 600V AC

Type	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (in.)			Service	Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D			
K7T	9817-8511	7	1/2"-20 stud	1/2"-20 stud	H58888	20.0	43.0	6.0	O/U	HD Opening	U4667-X-8511
K7T	9817-8512	7	1/2"-20 stud	1/2"-20 stud	H58888	20.0	43.0	6.0	O/U	HD Cl. Plate	U4667-X-8512
K7T	9817-8532	7	1/2"-20 stud	1/2"-20 stud	H58888	20.0	43.0	6.0	O/U	HD Cl. Plate	U4667-X-8532

All units are UL listed.
 Hubs: Please see accessories on page 32.
 Connectors: Aluminum connectors, tin plated, appropriate Talon lugs must be used.
 Optional manual bypass H58888 available, normally for utility use only. 3 required.
 Ground: Units supplied with a ground.




9817-8532

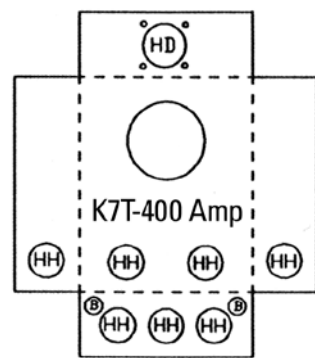

Knockouts (inches):	
B:	1-1/2, 2, 2-1/2
HH:	2-1/2, 3, 3-1/2, 4
HD:	Ø4.281 HUB OP



Bolt-in Meter Type K7

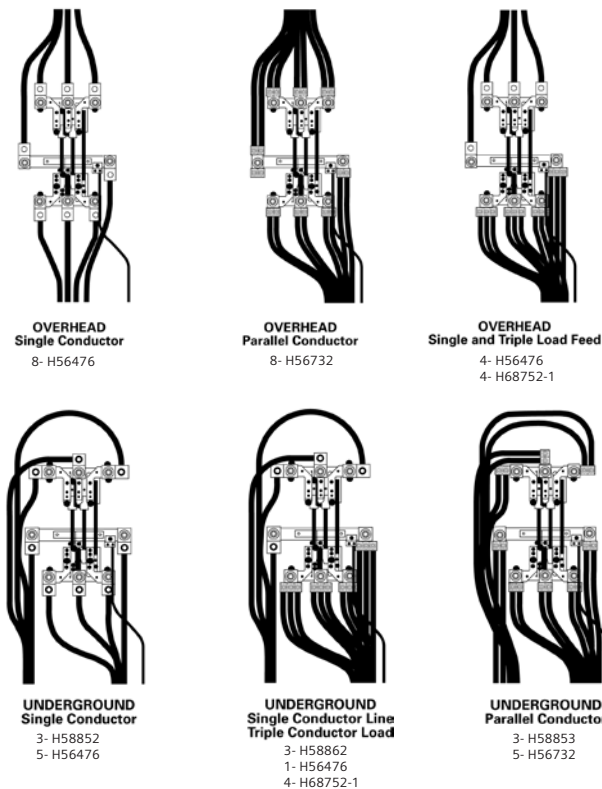

100/320A Meter Mounting Equipment

Ringless, 4/5 Jaw, Meter-Main Combinations

100-320 Amp, Ringless, Meter-Main 4/5 Terminal for 1 Phase, 3 wire 240V AC

Amps	Service *	Catalog Number	No. of Terminals	5th Terminal	Connectors		Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent	Breaker Installed
					Line	Load		W	H	D			
100	OH	UAB111-0PCH	4	H659-0121	#14-2/0	#6-350 kcmil	Horn	8.0	28.5	4.5	RX Opening	U7375-RL-KK	Field Installed
200	OH	UAB317-0PCH	4	H659-0121	#6-250	See breaker rating	Horn	8.0	28.5	4.5	RX Opening	U7607-RL-200-KK	Factory Installed
125	O/U	LGMM0202B1125RJBX	5	Included	#6-350 kcmil	#2-1/0 CU, 2/0 AL	Horn	18.5	17.0	5.1	RX Cl. Plate	U2351-RXL	Factory Installed
150	O/U	LGMM0202B1150RJBX	5	Included	#6-350 kcmil	#1-300 kcmil	Horn	18.5	17.0	5.1	RX Cl. Plate	No Equivalent	Factory Installed
200	O/U	LGMM0202B1200RJBX	5	Included	#6-350 kcmil	#1-300 kcmil	Horn	18.5	17.0	5.1	RX Cl. Plate	No Equivalent	Factory Installed
200	OH	LG0202B1200JLC	5	Included	#6-350 kcmil	See Breaker	Lever	16.0	36.2	4.8	RX Cl. Plate	U3791N-RXL-200-5T9-AMS	Factory Installed
200	OH	LG0202L1200JLC	5	Included	#6-350 kcmil	#6-250 kcmil	Lever	16.0	36.2	4.8	RX Cl. Plate	N/A	Field Installed
200	O/U	LG0202B1200JL6	5	Included	#6-350 kcmil	#6-250 kcmil	Lever	16.0	39.0	4.8	RX Cl. Plate	N/A	Factory Installed
200	O/U	LG0202L1200JL6	5	Included	#6-350 kcmil	#6-250 kcmil	Lever	16.0	39.0	4.8	RX Cl. Plate	N/A	Field Installed
320	O/U	LG0404B1400RLM	5	Included	#1-600 kcmil or (2) 1/2-250 kcmil	#1-600 kcmil or (2) 1/2-250 kcmil	Lever	27.0	29.0	6.0	HD Cl. Plate	U5890-X-2/200-K3L-5T6-AMS	Factory Installed

① SW represents an offset design. Meter socket is on the right

All units are UL listed.
 Hubs: Please see accessories on page 32.
 5th Terminal: See Table.
 Connectors: Aluminum connectors, tin plated.
 Ground: Units supplied with a ground.



LGMM0202B1200RJBX





UAB317-0PCH



LG0404L1400RLM




UAB417-XPG

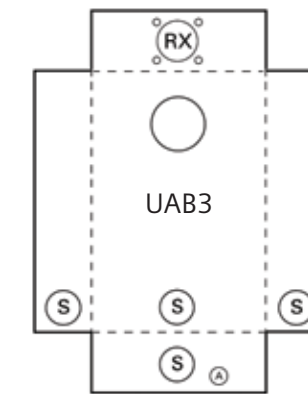

UAB1/3/4 Breaker Table		
UAB417		
Amps	Circuit breaker	
100	Q2100	L2100
125	Q2125	L2125
150	QN2150	LN2150
200	QN2200	LN2200
UAB317-0PCH		
200	QJ22B200	
UAB111 Circuit Breaker		
100	Q2100	L2100
125	Q2125	L2125

Knockouts (inches):	
A:	1/2
C:	1/2, 3/4, 1
S:	1, 1-1/4, 1-1/2, 2, 2-1/2
Z:	1-1/2, 2, 2-1/2
DD:	1-1/4, 1-1/2, 2, 2-1/2, 3
RX:	Ø2.750 HUB OP

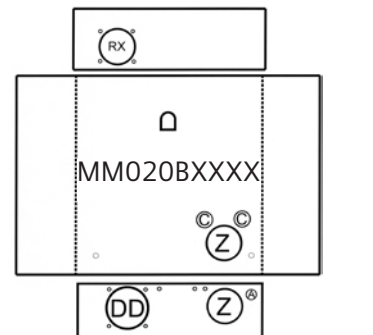

100/320A Meter Mounting Equipment

Ringless, 4/5 Jaw, Lever Bypass Meter-Load Center Combination

100-200 Amp Ringless Meter Combinations, 4 or 5 Terminal for 1 Phase, 3 Wire 600V AC

Service	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (inches)			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
O/U	LG0816B1100RBT	4	#4-250 kcmil	#4-250 kcmil	Horn	14.0	32.0	5.0	RX Cl. Plate	N/A
O/U	LG0816B1125RBT	4	#4-250 kcmil	#4-250 kcmil	Horn	14.0	32.0	5.0	RX Cl. Plate	N/A
O/U	LG08161150RBT	4	#4-250 kcmil	#4-250 kcmil	Horn	14.0	32.0	5.0	RX Cl. Plate	N/A
O/U	T0816B1150RBT	5	#4-250 kcmil	#4-250 kcmil	Horn	14.0	32.0	5.0	RX Cl. Plate	N/A
O/U	LG0816B1200RBT	4	#4-250 kcmil	#4-250 kcmil	Horn	14.0	32.0	5.0	RX Cl. Plate	N/A
O/U	T0816B1200RBT	5	#4-250 kcmil	#4-250 kcmil	Horn	14.0	32.0	5.0	RX Cl. Plate	N/A

320 Amp Ringless Meter Combination, 4 Terminal for 1 Phase, 3 wire 240V AC

Service	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (inches)			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
O/U	LG0816B1400RLT	4	#6-350kcmil	#6-350kcmil	Lever	27.0	29.0	6.0	RX Cl. Plate	N/A

All units are UL listed.
Hubs: Please see accessories on page 32.
Connectors: Aluminum connectors, tin plated.
Ground: Units supplied with a ground.

200A Meter Mounting Equipment

Ringless, 7 Jaw, Lever Bypass Meter Main

200 Amp Ringless Meter Main, 7 Terminal for 3 Phase, 4 Wire 600V AC

Service	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (inches)			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
O/U	LG0303B3200JLC	7	#6-350 kcmil	See Breaker	Lever	16.0	36.2	4.8	RX Cl. Plate	U5750-RXL-200-BL-AMS

200 Amp Ringless Cold Sequence Meter Main, 7 terminal for 3 Phase, 4 Wire 240V AC

Service	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (inches)			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
O/U	LG0303CS3200R	7	#6-350 kcmil	#6-350 kcmil	Lever	13.0	43.0	6.0	HD Cl. Plate	U5767-X-200-CB-AMS
UG	LG0303CS3200RD	7	#6-350 kcmil	#6-350 kcmil	Lever	26.0	28.0	6.0	Blank Top	U5787-O-200-CB-AMS

All units are UL listed.
Hubs: Please see accessories on page 32.
Connectors: Aluminum connectors, tin plated.
Ground: Units supplied with a ground.




125 & 200 Amp Condominium Meter Paks

120/240V AC, 1 Phase, 3 Wire, Ringless, 5 Jaw

Continuous Duty Amps Per Pos.	Meter Pos. Per Pak	Vertical or Rectangular	Catalog Number	Dimensions (in.)			Hub Provisions	Main Bus Rating	Line Connectors (Factory Installed)	Milbank Equivalent ^①
				H	W	D				
125	2	Vertical	WTG2211RJ	26.20	13.79	5.81	HD Cl. Plate	200amps	#6-300 kcmil	U2852-X
	3	Vertical	WTG3311RJ	38.69	25.42	7.56	(2) HD Cl. Plate	300amps	#2-600 kcmil	U2853-X
	4	Vertical	WTG4411RJ	47.69	25.42	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2854-X
	5	Rectangular	WTG4511RJ	38.69	38.94	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2855-X
	6	Rectangular	WTG4611RJ	38.69	38.94	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2856-X
	5	Rectangular	WTG6511RJ	38.69	40.00	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	None
	6	Rectangular	WTG6611RJ	38.69	40.00	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	None
200	2	Vertical	WTG4212RJ	29.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2862-X
	3	Vertical	WTG4312RJ	38.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2863-X
	4	Vertical	WTG4412RJ	47.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2864-X
	4	Vertical	WTG6412RJ	47.69	34.41	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	None
	5	Rectangular	WTG6512RJ	38.69	46.22	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	U2865-X
	6	Rectangular	WTG6612RJ	38.69	46.22	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	None
	6	Rectangular	WTG8612RJ	38.69	51.04	7.56	(2) HD Cl. Plate	800amps	(2) 1/0-750 kcmil or (4) 1/0-250 or (4) 1/0-3/0	U2866-X

① Milbank equivalents do not come equipped with line side lugs.

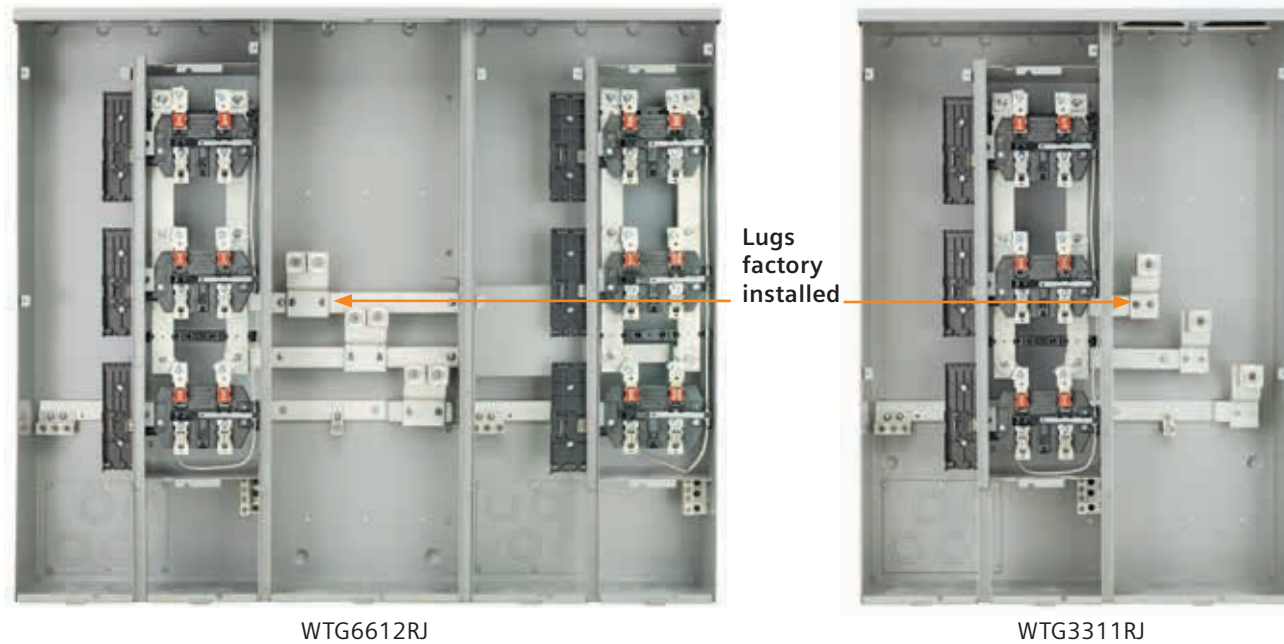


Service: Devices are rated for overhead and underground feed.
Hubs: Please see accessories on page 32.
Connectors: Included, see chart above.
Breakers: 125 Amp: use Siemens QP, Murray MP, or Talon LQ 200 Amp: use Siemens QS. See Page 29.
5th Terminal: Included.

125 & 200 Amp Condominium Meter Paks

120/240V AC, 1 Phase, 3 Wire, Ringless, 5 Jaw, Horn Bypass

Continuous Duty Amps Per Pos.	Meter Pos. Per Pak	Vertical or Rectangular	Catalog Number	Dimensions (in.)			Hub Provisions	Main Bus Rating	Line Connectors (Factory Installed)	Milbank Equivalent
				H	W	D				
125	2	Vertical	WTG2211RJB	26.20	13.79	5.81	HD Cl. Plate	200amps	#6-300 kcmil	N/A
	3	Vertical	WTG3311RJB	38.69	25.42	7.56	(2) HD Cl. Plate	300amps	#2-600 kcmil	N/A
	4	Vertical	WTG4411RJB	47.69	25.42	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	5	Rectangular	WTG4511RJB	38.69	38.94	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	6	Rectangular	WTG4611RJB	38.69	38.94	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	5	Rectangular	WTG6511RJB	38.69	40.00	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	N/A
	6	Rectangular	WTG6611RJB	38.69	40.00	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	N/A
200	2	Vertical	WTG4212RJB	29.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	3	Vertical	WTG4312RJB	38.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	4	Vertical	WTG4412RJB	47.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	5	Rectangular	WTG6512RJB	38.69	46.22	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	N/A
	6	Rectangular	WTG6612RJB	38.69	46.22	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	N/A

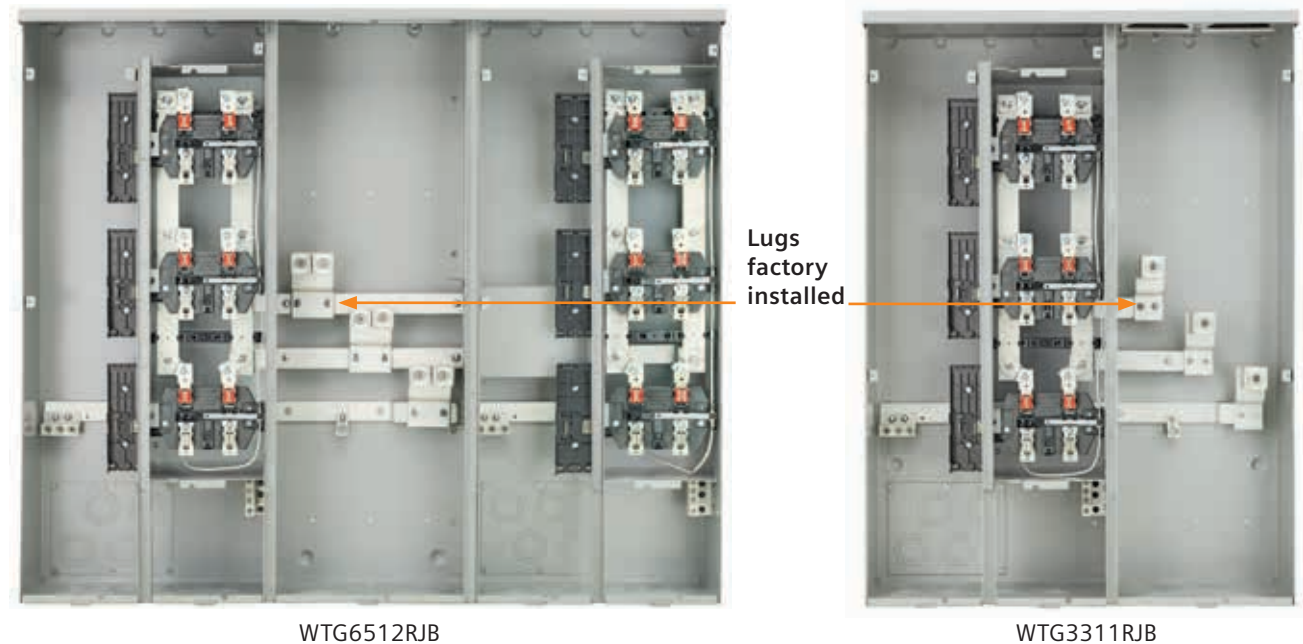


Service: Devices are rated for overhead and underground feed.
Hubs: Please see accessories on page 32.
Connectors: Included, see chart above.
Breakers: 125amp: use Siemens QP, Murray MP, or Talon LQ 200amp: use Siemens QS. See Page 29.
5th Terminal: Included.

125 & 200 Amp Condominium Meter Paks

120/240V AC, 1 Phase, 3 Wire, Ringless, 5th or 7th Jaw, Lever Bypass

120/240V AC, 1 Phase, 3 Wire, Ringless, 5th or 7th Jaw, Lever Bypass

Continuous Duty Amps Per Pos.	Meter Pos. Per Pak	Vertical or Rectangular	Catalog Number	Dimensions (in.)			Hub Provisions	Main Bus Rating	Line Connectors (Order Lugs From Table Below)	Milbank Equivalent
				H	W	D				
200	2	Vertical	WTGL4212RJ	36.75	33.50	9.00	(2) HD Cl. Plate	400amps	3/8" Studs	U4372-XT-5T9
	3	Vertical	WTGL4312RJ	49.75	33.50	9.00	(2) HD Cl. Plate	400amps	3/8" Studs	U4373-XT-5T9
	4	Vertical	WTGL4412RJ	62.75	33.50	9.00	(2) HD Cl. Plate	400amps	3/8" Studs	U4374-XT-5T9
	5	Rectangular	WTGL6512RJ	49.75	53.38	9.00	(2) HD Cl. Plate	600amps	3/8" Studs	U4375-XT-5T9
	6	Rectangular	WTGL6612RJ	49.75	53.38	9.00	(2) HD Cl. Plate	600amps	3/8" Studs	U4363-XT-5T9

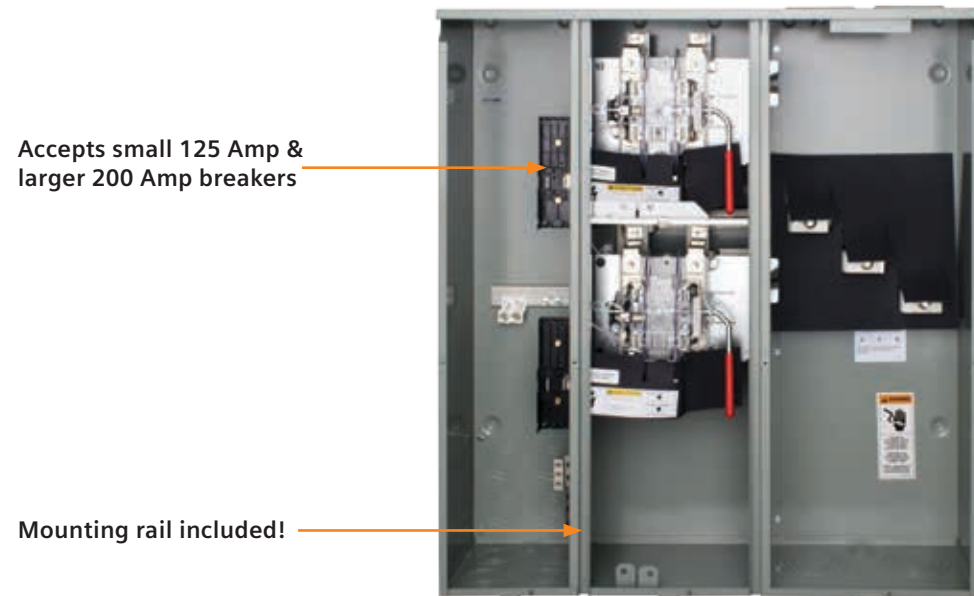

WTGL4412RJ

Connector Kits (order 1 kit for line connections)

L&G Kit #	Milbank Equivalent	Wire Range	Fits Catalog Numbers:
LK11600	K1540	up to (1) 600 kcmil per phase	All WTGLXXXXRJ
LK12350	K1350	up to (2) 350 kcmil per phase	All WTGLXXXXRJ
LK31600	K3441	up to (1) 600 kcmil per phase	All WTGLXXXXRJ
LK32350	K3442	up to (2) 350 kcmil per phase	All WTGLXXXXRJ

Service: Devices are rated for overhead and underground feed.
 Hubs: Please see accessories on page 32.
 Breakers: 125 Amp: use Siemens QP, Murray MP, or Talon LQ
 200 Amp: use Siemens QS.
 5th Terminal: Factory installed at the 9 o'clock position.
 Bypass: Jaw clamping lever bypass, type HQ.
 Connector Kits (order 1 kit for line connections).

100-200 Amp / Position Meter Mounting Equipment

Ringless, Direct Burial, 4/5 Jaw, Horn Bypass

100-200 Amp Ringless Direct Burial Meter Pedestal, 5 Terminal for 1 Phase, 3 wire 240V AC

No. of Pos.	Catalog Number	No. of Term.	Connectors			Bypass	Dimensions (in.)			Service	Main Type	Mounting Type	Milbank Equivalent
			Line	Load			W	H	D				
1	MPS0406B1100JL*	5	(2) #6-350 kcmil	#8-250 kcmil	Lever	10.0	34.0	4.0	UG	Series	Direct Burial	U5701-0-100S-5T9-AMS	
1	MPS0406B1200JL*	5	(2) #6-350 kcmil	#8-250 kcmil	Lever	10.0	34.0	4.0	UG	Series	Direct Burial	U5701-0-200S-5T9-AMS	
1	MP0406B1200RJL	5	(2) #6-350 kcmil	#8-250 kcmil	Lever	10.0	34.0	4.0	UG	Parallel	Direct Burial	N/A	
1	MPS0406B1200RJL	5	(2) #6-350 kcmil	#8-250 kcmil	Lever	10.0	34.0	4.0	UG	Series	Direct Burial	N/A	

*Ring Type

100 - 150 Amp Ringless Direct Burial Meter Pedestal, 4 Terminal for 1 Phase, 3 wire 240V AC

No. of Pos.	Amp	Catalog Number	No. of Term.	Connectors		Bypass	Dimensions			Service	Main Type	Mounting Type	Milbank Equivalent
				Line	Load		W	H	D				
1	100	MP0406B1100R	4	#6-250	#6-250	None	14.5	84.0	6.0	UG	Siemens QN 100	Direct Burial	N/A
2	100	MP0406B1100R2	4	#6-250	#6-250	None	19.0	84.0	6.0	UG	Siemens QN 100	Direct Burial	N/A
1	100	MPS0406B1100R	4	#6-250	#6-250	None	14.5	84.0	6.0	UG	Siemens QN 100	Direct Burial	N/A
2	100	MPS0406B1100R2	4	#6-250	#6-250	None	19.0	84.0	6.0	UG	Siemens QN 100	Direct Burial	N/A
1	125	MP0406B1125R	4	(2) #6-350 kcmil	#8-250 kcmil	Lever	14.5	84.0	6.0	UG	Siemens QN 125	Direct Burial	U5240-0-125
2	125	MP0406B1125R2	4	(2) #6-350 kcmil	#8-250 kcmil	None	19.0	84.0	6.0	UG	Siemens QN 125	Direct Burial	U5240-0-125
1	125	MPS0406B1125R	4	(2) #6-350 kcmil	#8-250 kcmil	None	14.5	84.0	6.0	UG	Siemens QN 125	Direct Burial	N/A
2	125	MPS0406B1125R2	4	(2) #6-350 kcmil	#8-250 kcmil	None	19.0	84.0	6.0	UG	Siemens QN 125	Direct Burial	N/A
1	150	MP0406B1150R	4	(2) #6-350 kcmil	#8-250 kcmil	None	14.5	84.0	6.0	UG	Siemens QN 150	Direct Burial	U5240-0-150
2	150	MP0406B1150R2	4	(2) #6-350 kcmil	#8-250 kcmil	None	19.0	84.0	6.0	UG	Siemens QN 150	Direct Burial	U5240-0-150
1	150	MPS0406B1150R	4	(2) #6-350 kcmil	#8-250 kcmil	None	14.5	84.0	6.0	UG	Siemens QN 150	Direct Burial	N/A
2	150	MPS0406B1150R2	4	(2) #6-350 kcmil	#8-250 kcmil	None	19.0	84.0	6.0	UG	Siemens QN 150	Direct Burial	N/A

200 Amp Ringless Direct Burial Meter Pedestal, 4 Terminal for 1 Phase, 3 wire 240V AC

No. of Pos.	Amp	Catalog Number	No. of Term.	Connectors		Bypass	Dimensions			Service	Main Type	Mounting Type	Milbank Equivalent
				Line	Load		W	H	D				
1	200	MP0406B1200RB	4	(2) #6-350 kcmil	#8-250 kcmil	Horn	14.5	84.0	6.0	UG	Siemens QN 200A	Direct Burial	N/A
2	200	MP0406B1200RB2	4	(2) #6-350 kcmil	#8-250 kcmil	Horn	19.0	84.0	6.0	UG	Siemens QN 200A	Direct Burial	N/A
1	200	MP0406B1200R	4	1/0-350kcmil	1/0-350kcmil	None	14.5	84.0	6.0	UG	Siemens QN 200A	Direct Burial	U5240-0-200
2	200	MP0406B1200R2	4	1/0-350kcmil	1/0-350kcmil	None	19.0	84.0	6.0	UG	Siemens QN 200A	Direct Burial	U5240-0-200
1	200	MP0406L1200R	4	1/0-350kcmil	1/0-350kcmil	None	14.5	84.0	6.0	UG	Main Lug	Direct Burial	N/A
2	200	MP0406L1200R2	4	1/0-350kcmil	1/0-350kcmil	None	19.0	84.0	6.0	UG	Main Lug	Direct Burial	N/A
1	200	MPS0406B1200R	4	1/0-350kcmil	1/0-350kcmil	None	14.5	84.0	6.0	UG	Siemens QN 200A	Direct Burial	N/A
2	200	MPS0406B1200R2	4	1/0-350kcmil	1/0-350kcmil	None	19.0	84.0	6.0	UG	Siemens QN 200A	Direct Burial	N/A

All units are UL listed.

Hubs: Please see accessories on page 32.

Connectors: Aluminum connectors, tin plated.

Ground: Units supplied with a ground.




MP0406B1200RJL

MPS0406B1100JL

TL Series Temporary Power Outlet Panels


Metered Devices

Surface Mount Type




- 125 ampere rating (125A MLO, 100A MB)
- 350 kcmil line side lugs
- Ring or ringless style covers
- Horn or lever bypass options
- Top and bottom feed options
- Factory installed light kit
- Factory installed photocell
- Stainless steel latch and hasp
- Easy to open and close receptacle cover
- Pole-mounted water and CATV/phone kits
- High quality Siemens loadcenter interior and breakers

Pedestal Mount Types



- 125 ampere rating (125A MLO, 100A MB)
- Ring or ringless style covers
- Single and back-to-back configurations
- 350 kcmil loopfeed lugs (back connected)
- Horn bypass option
- Direct burial and pad mount options
- Factory installed light kit
- Factory installed photocell
- Stainless steel latch and hasp
- Easy to open and close receptacle cover
- Pole-mounted water and CATV/phone kits
- High quality Siemens loadcenter interior and breakers



TL Series Temporary Power Outlet Panels

Un-Metered Devices



- 125 ampere rating (125A MLO, 100A MB)
- Loop feed models available
- Factory installed light kit
- Factory installed photocell
- Easy to open and close receptacle cover
- Slim design for 2 receptacle devices (7" wide)
- High quality Siemens loadcenter interior and breakers




- 125 ampere rating (125A MLO, 100A MB)
- 350 kcmil loopfeed lugs (back connected)
- Single or back-to-back configurations
- Direct burial or pad mount options
- Factory installed light kit
- Factory installed photocell
- Easy to open and close receptacle cover
- Externally attached water and CATV/phone kits
- High quality Siemens loadcenter interior and breakers




Pad Mount Direct Burial

Pedestal Mount Flange Kit

TL Series Temporary Power Outlet Panels

Build Your Own Catalog Numbering System

Follow the table below to configure a custom catalog number. Contact your local Talon agent or Siemens sales office for price and lead time. User assumes all responsibility for selecting proper configuration.

Talon Temporary Power

Main Type

L	Main Lugs, 125A
D	Main Breaker, 100A

Receptacles (3 max)

1	14-50R	125/250V	50A
1F	Designates GFCI Circuit Breaker Protection		
2	14-30R	125/250V	30A
2F	Designates GFCI Circuit Breaker Protection		
3	TT30R	125V	30A
3F	Designates GFCI Circuit Breaker Protection		
4	L6-30R	250V	30A
4F	Designates GFCI Circuit Breaker Protection		
5	6-20R	250V	20A
5F	Designates GFCI Circuit Breaker Protection		
6	L5-20R	125V	20A
6F	Designates GFCI Circuit Breaker Protection		
7	5-20R2GFI	125V	20A
7X	Designates non-weather-resistant GFCI receptacle		
8	5-20R2	125V	20A
8F	Designates GFCI Circuit Breaker Protection		
8G	Designates weather resistant receptacle with GFCI Circuit Breaker Protection		
9	L-530R	125V	30A
9F	Designates GFCI Circuit Breaker Protection		

Meter/Bypass

U	Unmetered
R	Ringless, No Bypass
N	Ring, No Bypass
L*	Ringless, Lever Bypass
H	Ringless, Horn Bypass

*Lever bypass available only in surface mount, topfeed configurations

Enclosure Type

S	Surface mount, un-metered
S2 ^②	Surface mount, un-metered, loop feed lugs
T	surface mount, top feed-metered
B	surface mount, bottom feed-metered
P	Direct burial pedestal
M	Pad mount pedestal
2P	Direct burial pedestal, double-sided
2M	Pad mount pedestal, double sided
C	MEG approved surface mount, UG only

Custom Options^②

L ^⑥	Light kit factory installed
LP ^⑥	Light kit with photocell factory installed
X ^⑥	Alternate receptacle configuration on double-sided pedestal
Cx	Custom color configuration
F	Meter Equipment Group Approved

Custom Color Guidelines:

- "Cx" designates custom color. Contact sales office for color code to insert into part number to replace the "x" in this designation.
- Additional charges apply and depend on the color needed.
- Custom color matching available: Customer must signoff on painted sample prior to production of order.
- Order cancellations will involve a fee after custom paint is ordered.

① Required fields.
② A minimum of 1 receptacle must be selected. A maximum of 3 receptacles, with up to 125amps total, may be selected. UL does not allow field installation of receptacle kits.
③ Two receptacle devices ship in a 7" wide enclosure and are wired with a 4 circuit interior. Depending on the receptacle configuration selected an additional circuit may or may not be available.
④ Enclosure includes same loop feed lugs as the pedestal devices. Enclosure is larger. Please see knockout diagrams for details.
⑤ Dash is only present if one of the options listed after the dash is needed.
⑥ Light kits are installed by the factory and require either a 120V GFCI breaker or 5-20R2GFI receptacle to power the light fixture.
⑦ Cable TV, phone, & water accessories are purchased separately and are not configured as part of the device.
⑧ Photocell is factory wired and is mounted internally. 120V AC photocell only.
⑨ "X" designates alternate receptacle configuration on each side. Contact sales office for pricing.

Example: Catalog Number: TL1F37NT-LP

Given specifications:

- 125A Main Lugs
- 50A, 125/250V receptacle with GFCI circuit breaker
- 30A, 125V receptacle with a standard circuit breaker
- 20A, 125V GFCI weather resistant receptacle
- Ring type meter at the top
- Pedestal mount device
- Light option with photocell

Step 1
Start with the power receptacle product line prefix identifier and choose the main type: (TL)

Step 2
Choose the first receptacle and its circuit breaker type: (1F)

Step 3
Choose the second receptacle and its circuit breaker type: (3)

Step 4
Choose the third receptacle and its circuit breaker type: (7)

Step 5
Choose utility meter & bypass type required: (N)

Step 6
Choose enclosure type: (T)

Step 7
Add dash and select light option with photocell: (-LP)

INSTALLER RESPONSIBLE FOR ENSURING UTILITY AND LOCAL CODE ACCEPTANCE

TL Series Temporary Power Outlet Panels

Most common items –See previous page to build your own catalog number

New Catalog Number	Mains Type	Enclosure Type	Meter Provision	Receptacle #1 ^②	Receptacle #2 ^②	Receptacle #3 ^②	Options
--------------------	------------	----------------	-----------------	----------------------------	----------------------------	----------------------------	---------

Surface Mount, Un-Metered

TL17US ^①	125A Main Lug	Surface Mount	Un-Metered	14-50R	5-20R2 GFI W.R.	N/A	N/A
TL37US ^①	125A Main Lug	Surface Mount	Un-Metered	TT30R	5-20R2 GFI W.R.	N/A	N/A
TL77US ^①	125A Main Lug	Surface Mount	Un-Metered	5-20R2GFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL137US ^①	125A Main Lug	Surface Mount	Un-Metered	14-50R	TT30R	5-20R2 GFI W.R.	N/A
TL577US ^①	125A Main Lug	Surface Mount	Un-Metered	6-20R	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL1F7US	125A Main Lug	Surface Mount	Un-Metered	14-50R, GFCI Brkr	5-20R2 GFI W.R.	N/A	N/A
TL1F3F7US	125A Main Lug	Surface Mount	Un-Metered	14-50R, GFCI Brkr	TT30R, GFCI Brkr	5-20R2 GFI W.R.	N/A
TL5F8G8GUS	125A Main Lug	Surface Mount	Un-Metered	6-20R, GFCI Brkr	5-20R2, GFCI Brkr, W.R.	5-20R2, GFCI Brkr, W.R.	N/A
TL1F3F7US2	125A Main Lug	Surface Mount	Un-Metered	14-50R, GFCI Brkr	TT30R, GFCI Brkr	5-20R2 GFI W.R.	Loop Feed Lugs

Surface Mount, Metered

TL77NT ^①	125A Main Lug	Top Feed	Metered- Ring	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL77NB ^①	125A Main Lug	Bottom Feed	Metered- Ring	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL77RT ^①	125A Main Lug	Top Feed	Metered- Ringless	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL77RB ^①	125A Main Lug	Bottom Feed	Metered- Ringless	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL137RT ^①	125A Main Lug	Top Feed	Metered- Ringless	14-50R	TT30R	5-20R2 GFI W.R.	N/A
TL577NT	125A Main Lug	Top Feed	Metered- Ring	6-20R	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL1F77NT	125A Main Lug	Top Feed	Metered- Ring	14-50R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL1F77RB	125A Main Lug	Bottom Feed	Metered- Ringless	14-50R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL5F77NT	125A Main Lug	Top Feed	Metered- Ring	6-20R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL5F77RT	125A Main Lug	Top Feed	Metered- Ringless	6-20R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL5F77RB	125A Main Lug	Bottom Feed	Metered- Ringless	6-20R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A

Pedestal Mount, Metered & Un-Metered

TL137UP	125A Main Lug	Burial Pedestal	Un-Metered	14-50R	TT30R	5-20R2 GFI W.R.	N/A
TL137NP	125A Main Lug	Burial Pedestal	Metered-Ring	14-50R	TT30R	5-20R2 GFI W.R.	N/A
TL1F3F7UP	125A Main Lug	Burial Pedestal	Un-Metered	14-50R, GFCI Brkr	TT30R, GFCI Brkr	5-20R2 GFI W.R.	N/A
TL138GUP	125A Main Lug	Burial Pedestal	Un-Metered	14-50R	TT30R	5-20R2, GFCI Brkr, W.R.	N/A
TL137UP-LP	125A Main Lug	Burial Pedestal	Un-Metered	14-50R	TT30R	5-20R2 GFI W.R.	Light & Photocell
TL137U2P	125A Main Lug	Burial Pedestal-Double Sided	Un-Metered	14-50R	TT30R	5-20R2 GFI W.R.	N/A

Special Accessories

Catalog Number	Description	Notes
TLAWATER ^③	Water Connection Accessory	Accessories are intended to mount on each side of a direct burial or pad mount pedestal. These accessories can be used independently provided they are mounted on a flat surface. Mounting these accessories to round poles is not recommended.
TLATVP	Television & Phone Connection Accessory	
TLALFB	Loopfeed Replacement Block	Includes (1) assembly. Replacement only.
TLA0816LG	Replacement interior for 10" wide devices	Replacement Only
TLAMS200	TL Series Meter Socket	Replacement Only
TLABULB	TL Series Light Bulb	Replacement Only
TLAPC120V	TL Series Photocell	Replacement Only

- ① Stocked item. Status subject to change without notice.
- ② NEMA receptacle configurations listed.
- ③ Accessory consists of trough only. User must install pipe and water connection point.



Circuit Breakers

Features

- Plug in
- UL listed for use with Talon branded meter combinations
- 1" Frame



Single Pole



Double Pole



4-Pole



Description	Amps	Catalog Number
1-Pole 120V	15	L115
1-Pole 120V	20	L120
2-Pole 120/240V	20	L220
2-Pole 120/240V	30	L230
2-Pole 120/240V	40	L240
2-Pole 120/240V	50	L250
2-Pole 120/240V	60	L260
2-Pole 120/240V	100	L2100
2-Pole 120/240V	125	L2125
4-Pole 120/240V	150	LN2150R
4-Pole 120/240V	200	LN2200R

Accessories	Catalog Number
Single Pole Padlocking Device	ECPLD1
Double Pole Padlocking Device	ECPLD2
4-Pole Padlocking Device	ECPQLN3
Handle Blocking Device (1 & 2 Pole)	ECQL1

Connector Lugs

H55890 #6-350 kcmil	3/8" Stud	H55890-1 #6-350 kcmil	3/8" Stud	H56734 #6-250 kcmil	1/2" Stud	H37892 #4-500 kcmil	1/2" Stud
H57606-K (2) #6-350 kcmil	3/8" Stud	H56476 #3/0-800 kcmil	1/2" Stud	H60162 (1) #4-600 kcmil [or] (2) #1/0-250 kcmil	1/2" Stud	H61300 (1) #4-600 kcmil [or] (2) #1/0-250 kcmil	1/2" Stud
H58022 (2) #6-250 kcmil	3/8" Stud	H56732 (2) #4-350 kcmil	1/2" Stud	H56732-1 (2) #4-350 kcmil	1/2" Stud	H56732-2 (2) #4-350 kcmil	3/8" Stud
H56732-M (2) #4-500 kcmil	1/2" Stud	H68752-1 (3) #6-250 kcmil	1/2" Stud	H56426 (4) #6-350 kcmil	1/2" Stud	H56477 #3/0-800 kcmil	1/2" Stud
H56425 (2) #6-350 kcmil	1/2" Stud	H56425-M (2) #4-500 kcmil	1/2" Stud	H58852 #3/0-800 kcmil	1/2" Stud	H56733 #3/0-800 kcmil	1/2" Stud
H56427 (2) #6-350 kcmil	1/2" Stud	H56427-M (2) #4-500 kcmil	1/2" Stud	H58853 (2) #6-350 kcmil	1/2" Stud	H59299-1	1/2" Stud

Connector Lugs

Pressure type lugs for Talon's stud type meter mounting devices are made of 6061-T6 aluminum to provide high strength and high conductivity. All lugs are tin-plated to ensure low contact resistance and to reduce corrosion.

Allen or hex head pressure screws are furnished to provide excellent conductor spread for maximum binding action with the lug. All Talon lugs are listed with Underwriters Laboratories.


Pressure lug connectors for meter mounting devices

Device Type	Conductor Size	Stud Opening	Pressure Screw Head	Dimensions ^① (Inches)			Anti-Rotation Feature	Catalog Number
				L	W	H		
	#6-350 kcmil	13/32"	9/16" Hex	2-1/4	1-1/8	1-1/4	No	H55890
HQ-4S	#6-350 kcmil	13/32"	5/16" Allen	2-1/4	1-1/8	1-1/4	No	H55890-1
HQ-5 S	#6-350 kcmil	13/32"	3/8" Allen	2-1/4	1-1/8	1-1/4	No	H57606-K
HQ-7S	(2) #6-250 kcmil	13/32"	5/16" Allen	2-3/16	1-5/8	1-3/16	No	H58022
HQ-4D	#4-500 kcmil	9/16"	3/8" Allen	2-13/16	1-1/2	1-9/16	No	H37892
HQ-5DM HQ-7D, HQ-7DF	(1) #4-600 kcmil or (2) #1/0-250 kcmil	9/16"	1/2" Allen	2-13/16	1-3/8	1-13/16	Yes No	H60162 H61300
K-4,5,7	(2) #6-350 kcmil	9/16"	5/16" Allen	2-7/8	1-57/64	1-1/4	No	H56425
K-4,5,7	(2) #4-500 kcmil	9/16"	3/8" Allen	2-13/16	2-1/16	1-9/16	No	H56425-M
K-4	(4) #6-350 kcmil	9/16"	5/16" Allen	2-7/8	3-15/16	1-1/4	No	H56426
K-4,5,7	(2) #6-350 kcmil	9/16"	5/16" Allen	4-15/16	1-1/8	2-1/16	Yes	H56427
K-4,5,7	(2) #2-500 kcmil	9/16"	3/8" Allen	4-1/4	1-1/8	1-13/16	Yes	H56427-M
K-5,7	#3/0-800 kcmil	9/16"	1/2" Allen	3-1/4	1-5/16	1-13/16	Yes	H56476
K-4,5,7	#3/0-800 kcmil	9/16"	1/2" Allen	3-1/4	1-5/16	1-13/16	Yes	H56477
K-5,7	(2) #4-500 kcmil	9/16"	3/8" Allen	2-13/16	2-5/32	1-9/16	No	H56490
K-5,7	(2) #4-350 kcmil	9/16"	5/16" Allen	2-7/8	1-59/64	1-1/4	Yes	H56732
K-5,7	(2) #4-350 kcmil	9/16"	5/16" Allen	2-7/8	1-59/64	1-1/4	No	H56732-1
K-5,7	(2) #4-500 kcmil	9/16"	3/8" Allen	2-13/16	2-5/32	1-13/16	Yes	H56732-M
K-4,5,7	#3/0-800 kcmil	9/16"	1/2" Allen	4-3/16	1-3/4	2-3/8	Yes	H56733
K-4,5,7 (Grd.)	#6-250 kcmil	9/16"	5/16" Allen	2-9/16	1-9/32	1-3/16	No	H56734
K-4,5,7	#3/0-800 kcmil	9/16"	1/2" Allen	3-15/16	1-3/4	1-13/16	Yes	H58852
K-4,5,7	(2) #6-350 kcmil	9/16"	5/16" Allen	3-15/16	1-1/8	1-1/2	Yes	H58853
K-4,5,7	(3) #6-250 kcmil	9/16"	5/16" Allen	2-7/8	2-31/64	1-7/16	Yes	H68752-1
K-4 extender	1/2-20 x 1-7/8" Stud	9/16"	None	4-1/4	1-1/4	2-3/8	Yes	H59299-1

Lug Extender

Device type	Stud opening	Stud size	Dimensions (inches)			Catalog Number
			W	H	D	
K-4	9/16"	1/2-20 x 1-7/8"	4-1/4	1-1/4	2-3/8	H59299-1 ^②

- ① Dimensions do not include height of pressure screw with conductor installed.
- ② Includes nut and washer assembly and washer.



Accessories

Removable Hub Kits

	Conduit Size (inches)	Catalog Number
 Removable hub	RX Type Hubs Small	
	1	H38596-2
	1-1/4	H38597-2
	1-1/2	H38598-2
	2	H38599-2
	2-1/2	H38600-2
	Cover plate - steel	H38595-1
Cover plate - aluminum	H38595-2	
 Cover plate	HD Type Hubs Large	
	3	H56856-2
	3-1/2	H56857-2
	4	H56858-2
	Cover plate - steel	H56933
Cover plate - aluminum	H56933-1	
 Large to Small Adaptor	Steel HD to RX	
		H9747-1113
	Aluminum HD to RX	
		H9747-1112

K-Base Accessories

	Description	Catalog Number
	K-7 only Isolated Neutral Kit	H69685-1
	K-7 Rotary Bypass - 600 Amp rated	H69623
	K-7 Rake Type Bypass - 600 Amp rated, temp use only	H58888
	K-4 Rake Type Bypass - 600 Amp rated, temp use only	H56495
	Insulated T-Handle Wrench	H69232-1
	Magnetic Hex Socket* *For use on meter Not for use on K7	H69546-1









Connector Kits (order 2 kits per socket for line & load connections)

L&G Kit #	Milbank Equivalent	Wire Range
LK11350	K1539	up to (1) 350 kcmil per phase
LK11600	K1540	up to (1) 600 kcmil per phase
LK12350	K1350	up to (2) 350 kcmil per phase
LK31600	K3441	up to (1) 600 kcmil per phase
LK32350	K3442	up to (2) 350 kcmil per phase

Sealing Rings

	Description	Catalog Number
	Stainless Steel Snap Type	H54602
	Stainless Steel Screw Type	H9738-8002
	Black plastic meter opening cover	H39968
	Clear plastic meter opening cover (with plug-in feet)	H659-0162

UAT, UAS, MQ and HQ Accessories

	Description	Catalog Number
	Insulated 5th terminal kit - Type AS, AT only	H659-0120
	Meter-load center 5th terminal kit	EC5J2
	Grounded 5th terminal kit - Type AS, AT only	H659-0121
	Anti-Inversion Clip for HQ Sockets	H59676
	MQ 5th terminal kit - 9:00	H8059864
	HQ 5th terminal kit - 9:00 w/o wire	H35815-2
	HQ 5th terminal kit - 9:00 w/ wire	H35815-3
	HQ 5th terminal kit - 9:00 w/ 9" lead	H35815-5*
	*For use with side wired devices only.	
	Grey touch-up paint -TUP61, 12 oz. can	XPT060
	Ground strap kit, HQ-5	35566-1
	Ground lug kit, #14-2	H36503
	Add-on grounding lug for HQ/HQU	H55303
	HQ isolated neutral kit (for 200A only, not for use with 320A) *Includes neutral and isolation block	H64685-1*
	Neutral isolation kit for HQ (for 200A only, not for use with 320A) *Isolates existing neutral	H64690-1*
	Insulated Jumper	H36479
	7/8" Barrel Lock Guard	HBRLOCK
	Lug Kit (2/0 - #4) Meter Combos	ECLK1-2



Spa Panels

For use as spa/hot tub service disconnect

Features:


- UL Listed
- Factory installed, 2-pole 50A or 60A GFCI breaker for 240V ground fault protection
- NEMA Type 3R outdoor enclosure
- 2 extra spaces (4 circuits maximum) for additional circuit breakers
- 125 Amp rated interior
- Factory installed 5 position ground bar
- Closure plate included
- Compact enclosure size
- Convenient standard package of 1
- Uses reliable Siemens circuit breakers

Amperage	Catalog Number	Dimensions (inches)			Receptacle Provision
		H	W	D	
30	LGP3S	12.3	6.0	4.5	TT130
50	LGP1S	12.3	6.0	4.5	L1450R

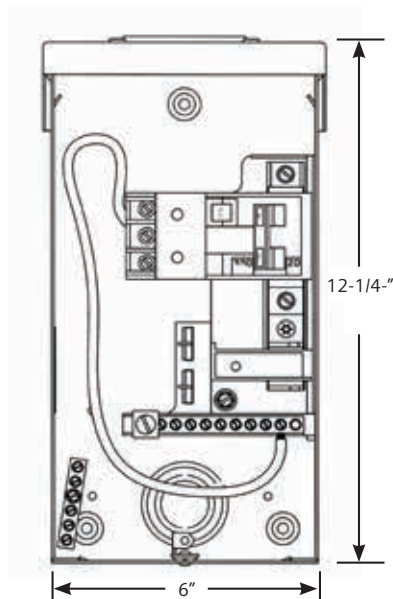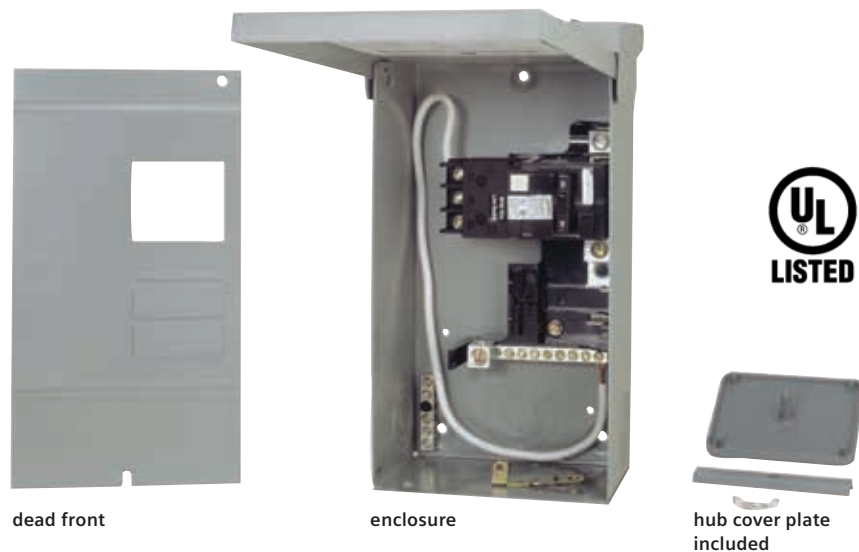

Watt-hour Meter Forms

Standard Forms /Transformer Rated or Self-Contained

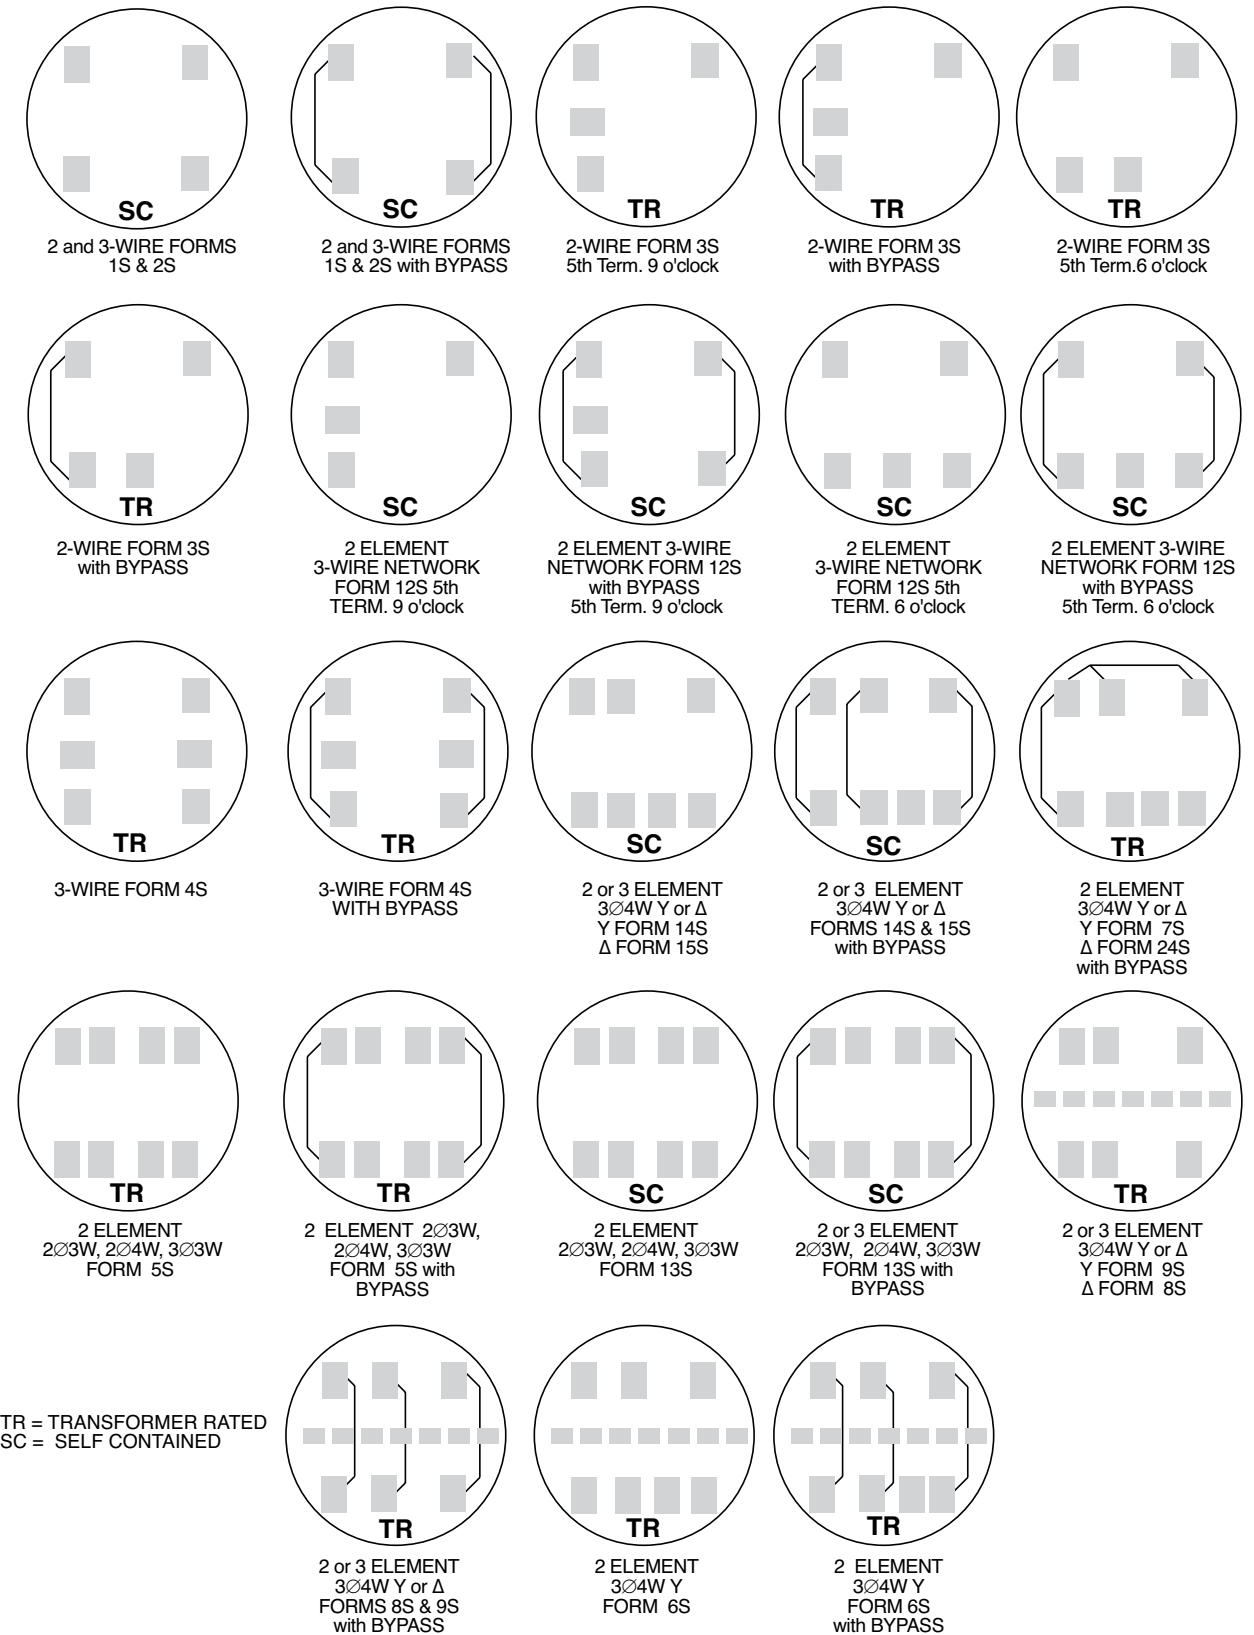

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Energization of Electrical Equipment

Important Information for Installers

Important Note

In addition to national and local electrical codes, many utilities have specific requirements for metering equipment. Always consult the serving utility for their specifications and requirements prior to ordering or installing meter mounting equipment.

Before Energizing

- A. Give equipment a thorough visual examination to determine that:
- 1) No shipping or installation damage exists.
 - 2) Proper clearances have been maintained.
 - 3) All connections have been made.
 - 4) Equipment is clean and dry.
- B. Make a thorough examination to:
- 1) Verify tightness of all bolted connections (see table below).
 - 2) Manually operate all circuit breakers, switches, relays, etc.
 - 3) Check rigidity of all mountings, bus bars and components.
 - 4) Use test equipment to check continuity of circuitry and integrity of insulation.
- C. All switches and circuit breakers should be in the "off" position.
- D. Verify that manual meter bypass (if applicable) is in non-bypass position.
- E. Install cover and/or close doors.
- F. If installation is not being energized at this time, follow "after-energizing" steps listed below. These steps will secure the installation in case of accidental energization.

When Energizing

- A. Use caution and follow established safety procedures:
- 1) Wear safety apparel.
 - 2) Use safety equipment.
 - 3) Take action to prevent injury to yourself and others in the event of failure of the installation.
 - 4) Take action to prevent/decrease damage to property in the event of failure of the installation.
 - 5) If you are unsure how to safely energize the installation, get someone who is knowledgeable to do it.

After Energizing

- A. Secure the installation:
- 1) To prevent accidental contact with energized parts, cover all openings with approved filler devices.
 - 2) To prevent unauthorized access, secure all covers and/or doors with approved security devices.
 - 3) Attach/post information to advise others of potential hazards associated with the installation.

Materials & Finishes

Reference Information

Materials

Steel Quality

The meter equipment listed in this catalog is made of galvanized steel (AISI* G90) to afford the best possible weather proofing.

*American Iron and Steel Institute.

Steel Sheet

16 gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated. (AISI G90).

14 gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated.

Aluminum Extrusion

Wire-Terminals: Alloy; 6061-T6, Tin-plated for Cu/Al wire.

Bus Bar: Alloy; 6101-O & 6063-O.

Aluminum Sheet

3000 series aluminum sheet, H14, or 5052 series aluminum sheet, H32. Where applicable thicknesses range from .064-.125.

Copper Sheet & Bus

Electrolytic copper with tin plating in most applications.

Insulating Materials

- In most units, support bases for current-carrying components are molded from fiberglass reinforced high-strength, track resistant, thermoset polyester molding compounds.
- Clear or black safety shields and polarity barriers are molded from high-strength, track resistant, polycarbonate molding compounds.
- Various sheet insulating materials, as appropriate for the application are utilized in the fabrication of flat, formed and punched component parts and barriers.

Finish

Process

ANSI 61 grey state-of-the-art electrostatically applied powder paint offers a durable, non-fading finish. For further information concerning the chemical analysis of the weather resistant finish, please contact the factory.

Metal Fasteners

Zinc-coated with a chromate dip.

Utility Approval Reference

Pg.	Amps	Term.	5th Term.	Pos.	Talon No.	Catalog	A	B	C	D	E	F	G	H	I	J	K	L
							AEC	ALE	AMER	AE	CILC	CIPS	IPC	KCPL	MAEC	NPU	PE	UE
4	135	4	avail	1	UAT111-OMSP		O/U											
4	135	4	avail	1	UAT111-OPQG		O/U								O/U			
4	135	4	avail	1	UAT111-BPQG		O/U											
4	135	4	avail	1	UAT111-XMBL					O/U				O/U				
4	135	4	avail	1	UAT111-OG										O/U			
4	135	4	avail	1	UAT111-OPZA										O/U			
5	200	4	avail	1	UAT317-OMSP			OH										
5	200	4	avail	1	UAT317-OG										O/U		O/U	
5	200	4	avail	1	UAT317-OGF												O/U	
5	200	4	avail	1	UAT317-OPCH												O/U	
5	200	4	avail	1	UAT317-OPQG			OH							O/U			
5	200	4	avail	1	UAT317-DPQG			OH										
5	200	4	avail	1	UAT417-OPQG			O/U										
5	200	4	avail	1	UAT417-PG												O/U	
5	160	4	avail	1	UAT417-PPQG													
5	200	4	avail	1	UAT417-XG												O/U	
5	200	4	avail	1	UAT417-XPQG			O/U							O/U			
5	200	4	avail	1	UAT417-XVZ			OH		OH				OH				
5	200	5	avail	1	UAT317-0FP			OH										
5	200	4	avail	1	UAT317-OPGP			OH										
5	200	5	avail	1	UAT317-DVZ			OH										
6	200	4	avail	1	UAS877-PPZA			UG										
6	200	4	avail	1	UAS877-PPGP										UG			
7	100	4	avail	2	UA2311-OP			O/U										
7	100	4	avail	2	UA2311-OPQG			O/U										
7	100	4	avail	2	UA2311-OPZA			O/U										
7	100	5	9:00	2	UA2311-XBBU					O/U				O/U				

Key
 OH = Overhead feed only
 UG = Underground feed only
 O/U = Overhead (or) underground feed approved

A) Adams Electric Coop
 B) Alliant Energy
 C) Ameren
 D) Aquila Electric
 E) Central Illinois Light Co.
 F) Central Illinois Public Service
 G) Illinois Power Co.
 H) Kansas City Power & Light
 I) MidAmerican Energy Co.
 J) Naperville Public Utilities
 K) Peru Electric
 L) Union Electric

Utility Approval Reference

Talon Catalog No.	Milbank Catalog No.	Ring vs. RL	Lugs Line Side	Lugs Load Side	BPS	Brl Lock	Description
UAT111-OMSP	N/A	RL	#14-2/0	#14-2/0	Horn	Yes	135A 5J RGLS 1POS HRNBPS MS OH/UG
UAT111-OPQG	U7487-RL-QG-KK U7487-RL-TG-KK	RL	#14-2/0	#14-2/0	Horn	No	135A 4J RGLS 1POS HRNBPS MS OH/UG
UAT111-BPQG	U7487-YL-TG-KK U8750-YL-KK	RL	#14-2/0	#14-2/0	Horn	No	135A 4J RGLS 1POS HRNBPS MS OH 1.25" HUB
UAT111-XMBL	N/A	RL	#14-2/0	#14-2/0	Horn	No	135A 5J RGLS 1POS HRNBPS MS OH/UG PSEG
UAT111-OG	U7487-RL-TG	RL	#14-2/0	#14-2/0	None	No	TALON 135A 4J RGLS 1POS NO BPS MS OH/UG
UAT111-OPZA	N/A	RL	#14-2/0	#14-2/0	Horn	7/16"	TALON 135A 4J RGLS 1POS HRNBPS MS OH/UG
UAT317-OMSP	N/A	RL	#6-350 kcmil	#6-350 kcmil	Horn	No	200A 5J RGLS 1POS HRNBPS MS OH
UAT317-OG	U7021-RL-TG	RL	#6-350 kcmil	#6-350 kcmil	None	No	200A 4J RGLS 1POS NO BPS MS OH
UAT317-OGF	N/A	RL	#6-350 kcmil	#6-350 kcmil	None	No	200A 4J RGLS 1POS NO BPS MS OH
UAT317-OPCH	N/A	RL	#6-350 kcmil	#6-350 kcmil	Horn	No	200A 4J RGLS 1POS HRNBPS MS OH CEC
UAT317-OPQG	U7021-RL-QG-KK U7021-RL-TG-KK	RL	#6-350 kcmil	#6-350 kcmil	Horn	No	135A 4J RGLS 1POS HRNBPS MS OH 1.25" HUB
UAT317-DPQG	N/A	RL	#6-350 kcmil	#6-350 kcmil	Horn	No	200A 4J RGLS 1POS HRNBPS MS OH 2" HUB
UAT417-OPQG	U7040-RL-TG-KK	RL	#6-350 kcmil	#6-350 kcmil	Horn	No	200A 4J RGLS 1POS HRNBPS MS OH/UG 2 GRD
UAT417-PG	U7040-O-TG	RL	#6-350 kcmil	#6-350 kcmil	None	No	200A 4J RGLS 1POS NO BPS MS UG ONLY
UAT417-PPQG	N/A	RL	#6-350 kcmil	#6-350 kcmil	Horn	No	200A 4J RGLS 1POS HRNBPS MS UG
UAT417-XG	U1527-XL U7040-XL-TG	RL	#6-350 kcmil	#6-350 kcmil	None	No	200A 4J RGLS 1POS NO BPS MS OH/UG
UAT417-XPQG	U7040-XL-TG-KK	RL	#6-350 kcmil	#6-350 kcmil	Horn	No	200A 4J RGLS 1POS HRNBPS MS OH/UG 2 GRD
UAT417-XVZ	N/A	RL	#6-350 kcmil	#6-350 kcmil	Horn	No	200A 5J RGLS 1POS HRNBPS MS OH/UG
UAT317-0FP	N/A	RL	#6-350kcmil	#6-350kcmil	Horn	7/8"	TALON 200A 5J RGLS 1POS HRNBPS MS OH 7/8
UAT317-OPGP	N/A	RL	#6-350kcmil	#6-350kcmil	Horn	7/8"	TALON 200A 4J RGLS 1POS HRNBPS MS OH
UAT317-DVZ	N/A	RL	#6-350kcmil	#6-350kcmil	Horn	No	TALON 200A 5J RGLS 1POS HRNBPS MS OH 2
UAS877-PPZA	U1080-O-KK-AEP U1980-O-KK-BL	RL	#6-350 kcmil	#6-350 kcmil	Horn	Yes	200A 4J RGLS 1POS HRNBPS MS UG-SW 7/16BL
UAS877-PPGP	N/A	RL	#6-350kcmil	#6-350kcmil	Horn	7/8"	TALON 200A 4J RGLS HRNBPS MS UG-SW 7/8BL
UA2311-OP	N/A	RL	#6-350 kcmil	#6-350 kcmil	Horn	No	100A 4J RGLS 2POS HRNBPS MS OH/UG
UA2311-OPQG	U8032-XL-KK	RL	#6-350 kcmil	#6-350 kcmil	Horn	No	100A 4J RGLS 2POS HRNBPS MS OH/UG 2 GRD
UA2311-OPZA	U8032-RL-TG-KK-BL	RL	#6-350 kcmil	#6-350 kcmil	Horn	Yes	100A 4J RGLS 2POS HRNBPS MS OH/UG 7/16BL
UA2311-XBBU	N/A	RL	#6-350 kcmil	#6-350 kcmil	Horn	Yes	100A 5J RGLS 2POS HRNBPS MS OH/UG 7/8BL

Utility Approval Reference

Pg.	Amps	Term.	5th Term.	Pos.	Talon No.	Catalog	A	B	C	D	E	F	G	H	I	J	K	L
							AEC	ALE	AMER	AE	CILC	CIPS	IPC	KCPL	MAEC	NPU	PE	UE
7	100	4	avail	3	UA3311-0PQG		O/U											
7	100	4	avail	3	UA3311-0PZA		O/U											
7	100	5	9:00	3	UA3311-XBBU				O/U					O/U				
7	100	4	avail	4	UA4311-0PQG		O/U											
7	100	4	avail	4	UA4311-0PZA		O/U											
7	100	5	9:00	4	UA4311-XBBU				O/U					O/U				
8	200	4	avail	2	UA2717-YPQG		O/U											
8	200	4	avail	2	UA2717-YPZA		O/U											
8	200	4	avail	3	UA3717-YPQG		O/U											
8	200	4	avail	3	UA3717-YPZA		O/U											
8	200	4	avail	4	UA4719-YPQG		O/U											
8	200	4	avail	4	UA4719-YPZA		O/U											
8	200	4	avail	5	UA5719-KPQG													
8	200	4	avail	5	UA5719-KPZA		O/U											
8	200	4	avail	6	UA6719-KPQG													
8	200	4	avail	6	UA6719-KPZA		O/U											
8	200	4	avail	2	UA2716-YG										O/U			
9	200	5	avail	1	40005-01										OH			
9	200	5	avail	1	40005-01F		OH											
9	200	5	6:00	1	40005-01QG			OH		OH	OH	OH	OH		OH			OH
9	200	4	avail	1	40404-02QG		UG	UG		UG	UG	UG			UG			UG
9	200	5	9:00	1	40405-02CO		O/U								O/U			
9	200	5	6:00	1	40405-02QG			O/U		O/U	O/U	O/U	O/U		O/U			O/U
9	200	4	avail	1	40804-01QG		O/U	OH		OH	OH	OH						OH
9	200	5	9:00	1	41005-01F			O/U		O/U	O/U	O/U						O/U
9	200	5	9:00	1	48805-0BNU		O/U											
9	200	5	6:00	1	9804-8592			O/U		O/U	O/U	O/U						O/U
9	200	5	6:00	1	40405-02MR			O/U		O/U	O/U	O/U						O/U

Key
 OH = Overhead feed only
 UG = Underground feed only
 O/U = Overhead (or) underground feed approved

A) Adams Electric Coop
 B) Alliant Energy
 C) Ameren
 D) Aquila Electric
 E) Central Illinois Light Co.
 F) Central Illinois Public Service
 G) Illinois Power Co.
 H) Kansas City Power & Light
 I) MidAmerican Energy Co.
 J) Naperville Public Utilities
 K) Peru Electric
 L) Union Electric

Utility Approval Reference

Talon Catalog No.	Milbank Catalog No.	Ring vs. RL	Lugs Line Side	Lugs Load Side	BPS	Brl Lock	Description
UA3311-0PQG	U8033-XL-KK	RL	#6-350 kcmil	#6-350 kcmil	Horn	No	100A 4J RGLS 3POS HRNBPS MS OH/UG 2 GRD
UA3311-0PZA	U8033-RL-TG-KK-BL	RL	#6-350 kcmil	#6-350 kcmil	Horn	Yes	100A 4J RGLS 3POS HRNBPS MS OH/UG 7/16BL
UA3311-XBBU	N/A	RL	#6-350 kcmil	#6-350 kcmil	Horn	Yes	100A 5J RGLS 3POS HRNBPS MS OH/UG 7/8BL
UA4311-0PQG	U8034-XL-KK	RL	#6-350 kcmil	#6-350 kcmil	Horn	No	100A 4J RGLS 4POS HRNBPS MS OH/UG 2GRD
UA4311-0PZA	U8034-RL-TG-KK-BL	RL	#6-350 kcmil	#6-350 kcmil	Horn	Yes	100A 4J RGLS 4POS HRNBPS MS OH/UG 7/16BL
UA4311-XBBU	N/A	RL	#6-350 kcmil	#6-350 kcmil	Horn	Yes	100A 5J RGLS 4POS HRNBPS MS OH/UG 7/8BL
UA2717-YPQG	U1252-RRL-KK-K1 U1252-R-TG-KK	RL	1/0-600 kcmil	#6-350 kcmil	Horn	No	200A 4J RGLS 2POS HRNBPS MS OH/UG 2 GRD
UA2717-YPZA	U1252-R-TG-KK-BL U1252-X-KK-K3-BL	RL	1/0-600 kcmil	#6-350 kcmil	Horn	Yes	200A 4J RGLS 2POS HRNBPS MS OH/UG 7/16BL
UA3717-YPQG	U1253-RRL-KK-KI U1253-R-TG-KK	RL	1/0-600 kcmil	#6-350 kcmil	Horn	No	200A 4J RGLS 3POS HRNBPS MS OH/UG 2 GRD
UA3717-YPZA	U1253-R-TG-KK-BL U1253-X-KK-K3-BL	RL	1/0-600 kcmil	#6-350 kcmil	Horn	Yes	200A 4J RGLS 3POS HRNBPS MS OH/UG 7/16BL
UA4719-YPQG	U1254-R-TG-KK	RL	(2) 1/0-600 kcmil	#6-350 kcmil	Horn	No	200A 4J RGLS 4POS HRNBPS MS OH/UG 2 GRD
UA4719-YPZA	U1254-R-TG-KK-BL U1254-X-KK-K3-BL	RL	(2) 1/0-600 kcmil	#6-350 kcmil	Horn	Yes	200A 4J RGLS 4POS HRNBPS MS OH/UG 7/16BL
UA5719-KPQG	U1255-R-TG-KK	RL	(2) 1/0-600 kcmil	#6-350 kcmil	Horn	No	200A 4J RGLS 5POS HRNBPS MS OH/UG 2 GRD
UA5719-KPZA	U1255-R-TG-KK-BL U1255-X-KK-K3-BL	RL	(2) 1/0-600 kcmil	#6-350 kcmil	Horn	Yes	200A 4J RGLS 5POS HRNBPS MS OH/UG 7/16BL
UA6719-KPQG	U1256-R-TG-KK	RL	(2) 1/0-600 kcmil	#6-350 kcmil	Horn	No	200A 4J RGLS 6POS HRNBPS MS OH/UG 2 GRD
UA6719-KPZA	U1256-R-TG-KK-BL U1256-X-KK-K3-BL	RL	(2) 1/0-600 kcmil	#6-350 kcmil	Horn	Yes	200A 4J RGLS 6POS HRNBPS MS OH/UG 7/16BL
UA2716-YG	N/A	RL	#6-350kcmil	#6-350kcmil	None	No	TALON 200A 4J RGLS 2POS NO BPS MS OH/UG
40005-01	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	TALON 200A HQ-5 MS LVR BPS
40005-01F	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	TALON 200A 5J RGLS 1POS LVRBPS MS OH
40005-01QG	U9550-RL-QG	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 5J RGLS 1POS LVRBPS MS OH 2 GRD
40404-02QG	U9801-RXL-QG U9800-RRL-QG	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 4J RGLS 1POS LVRBPS MS OH/UG 2GRD
40405-02CO	U4451-RXL-5T9	RL	#6-350 kcmil	#6-350 kcmil	Lever	Yes	200A 5J RGLS 1POS LVRBPS MS OH/UG 7/8BL
40405-02QG	U9581-RL-QG-AEP	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 5J RGLS 1POS LVRBPS MS OH/UG 2 GRD
40804-01QG	U9800-RRL	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 4J RGLS 1POS LVRBPS MS OH/UG
41005-01F	UAP9550-RL-TG-5T9-HSP	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 5J RGLS 1POS LVRBPS MS OH
48805-0BNU	N/A	RL	#6-350 kcmil	#6-350 kcmil	Lever	Yes	200A 5J RGLS 1POS LVRBPS MS OH/UG 7/16BL
9804-8592	U9581-RXL-QG	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 5J RGLS 1POS LVRBPS MS OH/UG
40405-02MR	U9551-RXL-QG-AMS	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 5J RGLS 1POS LVRBPS MS OH/UG

Utility Approval Reference

Pg.	Amps	Term.	5th Term.	Pos.	Talon No.	Catalog	A	B	C	D	E	F	G	H	I	J	K	L
							AEC	ALE	AMER	AE	CILC	CIPS	IPC	KCPL	MAEC	NPU	PE	UE
9	200	5	6:00	1	41405-02MR			O/U		O/U	O/U	O/U						O/U
9	125	5	6:00	1	42305-02MR			OH		OH	OH	OH						OH
9	125	5	6:00	1	42395-02MR			OH		OH	OH	OH						OH
9	200	5	6:00	1	42405-01MR			OH		OH	OH	OH						OH
9	200	5	6:00	1	42425-02MR			OH		OH	OH	OH						OH
9	200	5	6:00	1	42705-02MR			O/U		O/U	O/U	O/U						O/U
9	200	5	6:00	1	44305-02MR			O/U		O/U	O/U	O/U						O/U
9	200	4	avail	1	40404-025										O/U			
9	200	5	avail	1	40405-025										O/U			
10	200	7	n/a	1	40607-02BU			O/U										
10	200	7	N/A	1	40007-01			OH							OH			
10	200	7	N/A	1	40007-01QG			OH	OH		OH	OH	OH		OH			OH
10	200	7	N/A	1	40407-015			O/U										
10	200	7	N/A	1	40407-01NU			O/U										
10	200	7	N/A	1	40407-025			O/U							O/U			
10	200	7	N/A	1	40407-0250		O/U											
10	200	7	N/A	1	40407-02CH											O/U		
10	200	7	N/A	1	40407-02CO			OH							OH			
10	200	7	N/A	1	40407-02QG			O/U	O/U		O/U	O/U	O/U		O/U			O/U
10	200	7	N/A	1	48807-02NU			O/U										
10	200	7	N/A	1	42407-01MR			OH		OH	OH	OH						OH
10	200	7	N/A	1	44307-02MR			O/U		O/U	O/U	O/U						O/U
10	200	7	avail	1	40607-025					O/U				O/U				
11	320	7	N/A	1	44707-02PP			O/U										
11	320	4	avail	1	47604-82			O/U							O/U			

Key
 OH = Overhead feed only
 UG = Underground feed only
 O/U = Overhead (or) underground feed approved

A) Adams Electric Coop
 B) Alliant Energy
 C) Ameren
 D) Aquila Electric
 E) Central Illinois Light Co.
 F) Central Illinois Public Service
 G) Illinois Power Co.
 H) Kansas City Power & Light
 I) MidAmerican Energy Co.
 J) Naperville Public Utilities
 K) Peru Electric
 L) Union Electric

Utility Approval Reference

Talon Catalog No.	Milbank Catalog No.	Ring vs. RL	Lugs Line Side	Lugs Load Side	BPS	Brl Lock	Description
41405-02MR	UAP9551-XL-QG-HSP	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 5J RGLS 1POS LVRBPS MS OH/UG
42305-02MR	U6193-RL-QG-AMS	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	125A 5J RGLS 1POS LVRBPS MS OH
42395-02MR	U6193-YL-QG-AMS	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	125A 5J RGLS 1POS LVRBPS MS OH
42405-01MR	U9550-RRL-QG-AMS	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 5J RGLS 1POS LVRBPS MS OH
42425-02MR	U9550-RDL-QG-AMS	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 5J RGLS 1POS LVRBPS MS OH
42705-02MR	U9581-RXL-QG-AMS	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 5J RGLS 1POS LVRBPS MS OH/UG
44305-02MR	U9551-RXL-QG-AMS	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 5J RGLS 1POS LVRBPS MS OH/UG
40404-025	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	TALON 200A 4J RGLS 1POS LVRBPS MS OH/UG
40405-025	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	TALON A 5J RGLS 1POS LVRBPS MS OH/UG
40607-02BU	U7423-RXL	RL	#6-350 kcmil	#6-350 kcmil	Lever	Yes	200A 7J RGLS CQ LVRBPS MS OH/UG 7/8BL
40007-01	U9700-RRL	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 7J RGLS 1POS LVRBPS MS OH
40007-01QG	U9700-RRL	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 7J RGLS 1POS LVRBPS MS OH 2GRD
40407-015	N/A	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 7J RGLS 1POS LVRBPS MS OH/UG
40407-01NU	N/A	RL	#6-350 kcmil	#6-350 kcmil	Lever	Yes	200A 7J RGLS 1POS LVRBPS MS OH/UG 7/16BL
40407-025	U4701-RL U4701-RRL U9701-XL-TG U4701-RXL U4701 U9701-RRL U9701-RXL	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 7J RGLS 1POS LVRBPS MS OH/UG NO GRD
40407-0250	N/A	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 7J RGLS 1POS LVRBPS MS OH/UG
40407-02CH	N/A	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 7J RGLS 1POS LVRBPS MS OH/UG
40407-02CO	U4701-XL	RL	#6-350 kcmil	#6-350 kcmil	Lever	Yes	200A 7J RGLS 1POS LVRBPS MS OH/UG 7/8BL
40407-02QG	U4701-RL-TG U9701-XL-TG-QG U9701-RXL-QG U9701-X-QG-AEP	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 7J RGLS 1POS LVRBPS MS OH/UG 2 GRD
48807-02NU	N/A	RL	#6-350 kcmil	#6-350 kcmil	Lever	Yes	200A 7J RGLS 1POS LVRBPS MS OH/UG 7/16BL
42407-01MR	U9700-RRL-QG-AMS	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 7J RGLS 1POS LVRBPS MS OH
44307-02MR	U9701-RXL-QG-AMS	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 7J RGLS 1POS LVRBPS MS OH/UG
40607-025	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	N/A
44707-02PP	N/A	RL	3/0-800 kcmil	1/2"-20 stud	Lever	No	320A 7J RGLS 1POS LVRBPS MS OH/UG-SW LUG
47604-82	U4363-X-QG-K3-K2 U1779-R-K3-BLG U1079-X-K3-K2	RL	#4-600 kcmil	#4-600 kcmil	Lever	No	320A 4J RGLS 1POS LVRBPS MS OH/UG W/LUGS

Utility Approval Reference

Pg.	Amps	Term.	5th Term.	Pos.	Talon No.	Catalog	A	B	C	D	E	F	G	H	I	J	K	L	
							AEC	ALE	AMER	AE	CILC	CIPS	IPC	KCPL	MAEC	NPU	PE	UE	
11	320	4	avail	1	48004-82			O/U										O/U	
11	320	4	avail	1	48104-02					O/U				O/U	O/U				
11	320	4	avail	1	48104-82WI			O/U	O/U		O/U	O/U	O/U						O/U
11	320	4	avail	1	48704-82GP			O/U							O/U				
11	320	7	N/A	1	48707-82			O/U							O/U				
11	320	7	N/A	1	49807-026				OH		OH	OH	OH						OH
11	320	5	6:00	1	49905-026				OH		OH	OH	OH						OH
11	320	7	N/A	1	9804-9109				O/U		O/U	O/U	O/U						O/U
11	320	5	6:00	1	42805-42MR				O/U		O/U	O/U	O/U						O/U
11	320	7	N/A	1	42807-02MR				O/U		O/U	O/U	O/U						O/U
11	320	5	6:00	1	43005-42MR				O/U		O/U	O/U	O/U						O/U
11	320	5	6:00	1	47605-82MR				OH		OH	OH	OH						OH
11	320	7	avail	1	44707-02										O/U				
11	320	4	avail	1	47604-02QG				O/U		O/U	O/U	O/U						O/U
11	320	7	avail	1	48707-02										O/U				
11	320	7	avail	1	48707-029										O/U				
11	320	7	avail	1	49007-02FL				O/U		O/U	O/U	O/U						O/U
12	200	5	9:00	2	404052-023NU			O/U	O/U		O/U	O/U	O/U						O/U
12	200	5	9:00	3	404053-023NU			O/U	O/U		O/U	O/U	O/U						O/U
12	200	5	9:00	4	404054-223NU				O/U		O/U	O/U	O/U						O/U
12	200	5	9:00	5	404055-223NU				O/U		O/U	O/U	O/U						O/U
12	200	5	9:00	6	404056-223NU				O/U		O/U	O/U	O/U						O/U

Key
 OH = Overhead feed only
 UG = Underground feed only
 O/U = Overhead (or) underground feed approved

A) Adams Electric Coop
 B) Alliant Energy
 C) Ameren
 D) Aquila Electric
 E) Central Illinois Light Co.
 F) Central Illinois Public Service
 G) Illinois Power Co.
 H) Kansas City Power & Light
 I) MidAmerican Energy Co.
 J) Naperville Public Utilities
 K) Peru Electric
 L) Union Electric

Utility Approval Reference

Talon Catalog No.	Milbank Catalog No.	Ring vs. RL	Lugs Line Side	Lugs Load Side	BPS	Brl Lock	Description
48004-82	U3000-O-2/K3L-BL U3000-O-2/K3L	RL	#4-600 kcmil	#4-600 kcmil	Lever	No	320A 4J RGLS 1POS LVRBPS MS UG-SW W/LUGS
48104-02	U1432-O U1797-X-TG U2448-X U4702-X-TG U4363-R U4905-X	RL	3/8"-24 stud	3/8"-24 stud	Lever	No	320A 4J RGLS 1POS LVRBPS MS OH/UG-SW
48104-82WI	U4257-X-2/K2	RL	3/8"-24 stud	3/8"-24 stud	Lever	No	320A 4J RGLS 1POS LVRBPS MS OH/UG-SW
48704-82GP	U4912-X-K3BLG	RL	#4-600 kcmil	#4-600 kcmil	Lever	Yes	320A 4J RGLS 1POS LVRBPS MS OH/UG-SW
48707-82	N/A	RL	(2) #4-350 kcmil	(2) #6-250 kcmil	Lever	No	320A 7J RGLS 1POS LVRBPS MS OH/UG-SW W/ LUGS
49807-026	N/A	RL	0	0	Lever	No	320A 7J RGLS 1POS LVRBPS MS OH/UG
49905-026	N/A	RL	0	0	Lever	No	320A 5J RGLS 1POS LVRBPS MS OH/UG
9804-9109	N/A	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	320A 7J RGLS 1POS LVRBPS MS OH/UG
42805-42MR	U5786-X-K3-K2-5T6-BL-AMS	RL	(2) #4-350 kcmil	(2) #6-350 kcmil	Lever	No	320A 5J RGLS 1POS LVRBPS MS OH/UG 2 GRD
42807-02MR	U4911-X-QG-BL-AMS	RL	(2) #4-350 kcmil	(2) #6-350 kcmil	Lever	No	320A 7J RGLS 1POS LVRBPS MS OH/UG 2 GRD
43005-42MR	U5740-X-K3L-K2L-5T6-AMS	RL	#4-600 kcmil (2) #1/0-250 kcmil	(2) #6-350 kcmil	Lever	No	320A 5J RGLS 1POS LVRBPS MS OH/UG 2 GRD
47605-82MR	U4363-X-QG-K3-K2-5T6-AMS	RL	#4-600 kcmil (2) #1/0-250 kcmil	(2) #6-350 kcmil	Lever	No	320A 5J RGLS 1POS LVRBPS MS OH/UG 2 GRD
44707-02	N/A	RL	1/2"-20 stud	1/2"-20 stud	Lever	No	TALON HQ-7D/SW 320AMP W/C.P.
47604-02QG	N/A	RL	3/8"-24 stud	3/8"-24 stud	Lever	No	TALON 320A 4J RGLS 1POS LVRBPS MS OH/UG
48707-02	N/A	RL	3/8"-24 stud	3/8"-24 stud	Lever	No	TALON 320A 7J RGLS 1POS LVRBPS MS OH/UG
48707-029	N/A	RL	3/8"-24 stud	3/8"-24 stud	Lever	No	TALON 320A 7J RGLS HQ7S SW CP NO-GR 7/16
49007-02FL	N/A	RL	1/2"-20 stud	1/2"-20 stud	Lever	No	TALON 320A 7J RGLS 1POS LVRBPS MS OH/UG
404052-023NU	U2872-XT-5T9	RL	1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 5J RGLS 2POS LVRBPS MS OH/UG B.L.
404053-023NU	U2873-XT-5T9	RL	1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 5J RGLS 3POS LVRBPS MS OH/UG B.L.
404054-223NU	U2874-XT-5T9	RL	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 5J RGLS 4POS LVRBPS MS OH/UG B.L.
404055-223NU	U2875-XT-5T9	RL	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 5J RGLS 5POS LVRBPS MS OH/UG B.L.
404056-223NU	U2876-XT-5T9	RL	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 5J RGLS 6POS LVRBPS MS OH/UG B.L.

Utility Approval Reference

Pg.	Amps	Term.	5th Term.	Pos.	Talon No.	Catalog											
						A	B	C	D	E	F	G	H	I	J	K	L
						AEC	ALE	AMER	AE	CILC	CIPS	IPC	KCPL	MAEC	NPU	PE	UE
12	200	7	N/A	2	404072-023NU		O/U										
12	200	7	N/A	3	404073-023NU		O/U										
12	200	7	N/A	4	404074-223NU		O/U										
12	200	5	avail	4	404054-023NU		O/U										
12	200	5	avail	5	404055-023NU		O/U										
12	200	5	avail	6	404056-023NU		O/U										
12	200	7	avail	5	404075-223NU		O/U										
12	200	7	avail	6	404076-223NU		O/U										
13	100/200	4	avail	1	UAP317-PPCH										UG		
13	100/200	4	avail	1	UAP317-PPWI		UG										
13	100/200	4	avail	1	UAPB317-PPCH										UG		
14	200	5	6:00	1	40405P-9WI		UG										
14	200	7	N/A	1	40407P-9CH										UG		
14	200	7	N/A	1	40407P-9WI		UG										
14	320	4	avail	1	47604P-9WI		UG										
14	320	4	avail	1	47604PB-9CH										UG		
15	20	13	N/A	1	9837-0354	O/U											
15	20	8	N/A	1	9837-0930		O/U										
15	20	8	N/A	1	9837-0931		O/U										
15	20	13	N/A	1	9837-0932		O/U										
15	20	13	N/A	1	9837-0933		O/U										
15	20	8	N/A	1	9837-8403		O/U										
15	20	13	N/A	1	9837-8503		O/U										
15	20	8	N/A	1	9837-0914												
15	20	13	N/A	1	9837-0915												
15	20	6	N/A	1	9837-0934		O/U										

Key
 OH = Overhead feed only
 UG = Underground feed only
 O/U = Overhead (or) underground feed approved

- A) Adams Electric Coop
- B) Alliant Energy
- C) Ameren
- D) Aquila Electric
- E) Central Illinois Light Co.
- F) Central Illinois Public Service
- G) Illinois Power Co.
- H) Kansas City Power & Light
- I) MidAmerican Energy Co.
- J) Naperville Public Utilities
- K) Peru Electric
- L) Union Electric

Utility Approval Reference

Talon Catalog No.	Milbank Catalog No.	Ring vs. RL	Lugs Line Side	Lugs Load Side	BPS	Brl Lock	Description
404072-023NU	N/A	RL	1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 7J RGLS 2POS LVRBPS MS OH/UG B.L.
404073-023NU	N/A	RL	1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 7J RGLS 3POS LVRBPS MS OH/UG B.L.
404074-223NU	N/A	RL	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 7J RGLS 4POS LVRBPS MS OH/UG B.L.
404054-023NU	N/A	RL	(2) 1/0-500kcmil	#6-350kcmil	Lever	No	N/A
404055-023NU	N/A	RL	(2) 1/0-500kcmil	#6-350kcmil	Lever	No	N/A
404056-023NU	N/A	RL	(2) 1/0-500kcmil	#6-350kcmil	Lever	No	N/A
404075-223NU	N/A	RL	(2) 1/0-500kcmil	#6-350kcmil	Lever	No	TALON 200A 7J RGLS 5POS LVRBPS MS OH/UG
404076-223NU	N/A	RL	(2) 1/0-500kcmil	#6-350kcmil	Lever	No	TALON 200A 7J RGLS 6POS LVRBPS MS OH/UG
UAP317-PPCH	N/A	RL	4/0-comp. lug	#6-350 kcmil	Horn	No	200A 4J RGLS HRNBPS PDSTL UG
UAP317-PPWI	N/A	RL	#6-350 kcmil	#6-350 kcmil	Horn	No	200A 4J RGLS HRNBPS PDSTL UG
UAPB317-PPCH	N/A	RL	4/0-comp. lug	See Breaker	Horn	No	200A 4J RGLS HRNBPS PDSTL UG BRKR PROV.
40405P-9WI	N/A	RL	#6-350 kcmil	#6-350 kcmil	Lever	No	200A 5J RGLS LVRBPS PDSTL UG HQP5-2
40407P-9CH	N/A	RL	(2) 1/0-500kcmil	#6-350kcmil	Lever	No	TALON 200A 7J RGLS LVRBPS PDSTL UG COMP
40407P-9WI	N/A	RL	(2) #4-350 kcmil	(2) #4-350 kcmil	Lever	No	200A 7J RGLS LVRBPS PDSTL UG
47604P-9WI	N/A	RL	1/0-600 kcmil	#6-350 kcmil	Lever	No	320A 4J RGLS LVRBPS PDSTL UG
47604PB-9CH	N/A	RL	3/8"-24 stud	#6-350 kcmil	Lever	No	320A 4J RGLS LVRBPS PDSTL UG 2-200A BRKR
9837-0354	N/A	RL	#4-14	#8-14	None	No	20A 13J RGLS SPTCVR CT SKT PW-9S OH/UG
9837-0930	N/A	RL	#4-14	#8-14	None	No	20A 8J RGLS 1POS SKT SW FW OH/UG
9837-0931	N/A	RL	#4-14	#8-14	None	No	20A 8J RGLS 1POS SKT SW FW OH/UG
9837-0932	N/A	RL	#4-14	#8-14	None	No	20A 13J RGLS 1POS SKT SW FW OH/UG
9837-0933	N/A	RL	#4-14	#4-14	None	No	TALON SKT SW 20A 13J RGLS FW HCP
9837-8403	UC7448-XL	RL	#4-14	#8-14	None	No	20A 8J RGLS 1POS NO BPS OH/UG
9837-8503	UC7449-XL	RL	#4-14	#8-14	None	No	20A 13J RGLS 1POS NO BPS OH/UG W/CVR
9837-0914	U4496-XL-WC-41-AMS	RL	#4-14	#8-14	Lever	No	20A 8J RGLS 1POS LVRBPS CT SKT OH/UG
9837-0915	U4497-XL-WC-61-AMS	RL	#4-14	#8-14	Lever	No	20A 13J RGLS 1POS LVRBPS CT SKT OH/UG
9837-0934	N/A	RL	#4-14	#4-14	None	No	TALON 6J RGLS 2 PC COVER SKT PW ALLIANT

Utility Approval Reference

Pg.	Amps	Term.	5th Term.	Pos.	Talon Catalog No.	A	B	C	D	E	F	G	H	I	J	K	L
						AEC	ALE	AMER	AE	CILC	CIPS	IPC	KCPL	MAEC	NPU	PE	UE
15	20	6	N/A	1	9837-0935		O/U										
15	20	6	N/A	1	9837-8201									O/U			
15	20	13	N/A	1	9837-8501									O/U			
16	400	4	avail	1	9810-8502											O/U	
16	400	4	avail	1	9810-8523											O/U	
17	400	7	N/A	1	9817-8511											O/U	
17	400	7	N/A	1	9817-8512											O/U	
17	400	7	N/A	1	9817-8532											O/U	
18	125	5	9:00	1	LGMM0202B1125RJBX		O/U							O/U			
18	150	5	9:00	1	LGMM0202B1150RJBX		O/U							O/U			
18	200	5	9:00	1	LGMM0202B1200RJBX		O/U							O/U			
18	100	4	avail	1	UAB111-OPCH										OH		
18	200	4	avail	1	UAB317-OPCH												
18	100	5	9:00	1	LG0202B1100JLC												
18	200	5	9:00	1	LG0202B1200JLC			O/U		O/U	O/U	O/U					O/U
18	125	5	9:00	1	LG0202L1125JLC												
18	320	5	9:00	1	LG0404B1400RLC												
18	320	5	9:00	1	LG0404B1400RLM												
18	320	5	9:00	1	LG1224B1400RLM												
18	320	5	9:00	1	LG2440B1400RLM												
18	200	5	avail	1	LG0202B1200JL6			O/U		O/U	O/U	O/U					O/U
18	200	5	avail	1	LG0202L1200JL6			O/U		O/U	O/U	O/U					O/U
18	200	5	avail	1	LG0202L1200JLC			O/U		O/U	O/U	O/U					O/U
19	100	5	9:00	1	LG0816B1100JLT												
19	200	5	9:00	1	LG0816B1200JLT												
19	100	4	avail	1	LG0816B1100RBT		O/U										
19	125	4	avail	1	LG0816B1125RBT		O/U										
19	150	4	avail	1	LG0816B1150RBT		O/U							O/U			
19	150	5	avail	1	T0816B1150RBT		O/U										
19	200	4	avail	1	LG0816B1200RBT		O/U										
19	200	5	avail	1	T0816B1200RBT		O/U							O/U			

Key
OH = Overhead feed only
UG = Underground feed only
O/U = Overhead (or) underground feed approved

- A) Adams Electric Coop
- B) Alliant Energy
- C) Ameren
- D) Aquila Electric
- E) Central Illinois Light Co.
- F) Central Illinois Public Service
- G) Illinois Power Co.
- H) Kansas City Power & Light
- I) MidAmerican Energy Co.
- J) Naperville Public Utilities
- K) Peru Electric
- L) Union Electric

Utility Approval Reference

Talon Catalog No.	Milbank Catalog No.	Ring vs. RL	Lugs Line Side	Lugs Load Side	BPS	Brl Lock	Description
9837-0935	N/A	RL	#4-14	#4-14	None	No	TALON 5J RGLS 2 PC COVER SKT PW ALLIANT
9837-8201	N/A	RL	#4-14	#4-14	None	No	TALON PTS-6 SOCKET, STEEL, RINGLESS
9837-8501	N/A	RL	#4-14	#4-14	None	No	TALON PTS-13 MTG DEV W/CP
9810-8502	U4664-X-8502	RL	(2) #6-350 kcmil	(2) #6-350 kcmil	H56495	No	400A 4J RGLS 1POS K4UT MS OH/UG
9810-8523	U4664-X-8523	RL	1/2"-20 stud	1/2"-20 stud	H56495	No	400A 4J RGLS 1POS K4UT MS OH/UG
9817-8511	N/A	RL	1/2"-20 stud	1/2"-20 stud	H58888	No	400A 7J RGLS 1POS K7T MS OH/UG
9817-8512	N/A	RL	1/2"-20 stud	1/2"-20 stud	H58888	No	400A 7J RGLS 1POS K7T MS OH/UG
9817-8532	N/A	RL	1/2"-20 stud	1/2"-20 stud	H58888	No	400A 7J RGLS 1POS K7T MS OH/UG
LGMM0202B1125RJBX	U2351-RXL	RL	#6-250 kcmil	#2-1/0 CU,2/0 AL	Horn	No	200A 5J RGLS HRNBPS MTRMAIN OH/UG W/BRKR
LGMM0202B1150RJBX	No Equivalent	RL	#6-250 kcmil	#1-300 kcmil	Horn	No	150A 5J RGLS HRNBPS MTRMAIN OH/UG W/BRKR
LGMM0202B1200RJBX	No Equivalent	RL	#6-250 kcmil	#1-300 kcmil	Horn	No	200A 5J RGLS HRNBPS MTRMAIN OH/UG W/BRKR
UAB111-OPCH	N/A	RL	#14-2/0	See Breaker	Horn	No	100A 4J RGLS 1POS HRNBPS MTRMAIN OH
UAB317-OPCH	N/A	Ring	#6-350 kcmil	#6-300 kcmil	Horn	No	200A 4J RING 1POS HRNBPS MTRMAIN OH
LG0202B1100JLC	U3791N-RXL-100-5T9-AMS	RL	#6-350 kcmil	See Breaker	Lever	0	100A 4J 1POS RGLS LVRBPS MM OH
LG0202B1200JLC	U3791N-RXL-200-5T9-AMS	RL	#6-350 kcmil	See Breaker	Lever	0	200A 4J 1POS RGLS LVRBPS MM OH
LG0202L1125JLC	n/a	RL	#6-350 kcmil	See Breaker	Lever	0	125A 4J 1POS RGLS LVRBPS MM OH
LG0404B1400RLC	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	TALON 320A 4J RGLS LVRBPS MTR MAIN MB
LG0404B1400RLM	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	TALON 320A 4J RGLS LVRBPS MTR MAIN MB
LG1224B1400RLM	U5891-X-2/200-K3L-5T6-MLK-AMS	RL	0	0	Lever	0	320A 5J RGLS 1POS LVRBPS MTRMAIN OH/UG 2MB
LG2440B1400RLM	U5892-X-2/200-5T6-K3L-MLK-AMS	RL	0	0	Lever	0	320A 5J RGLS 1POS LVRBPS MTRMAIN OH/UG 2MB
LG0202B1200JL6	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	TALON 200A 2S/2C MTR MAIN OH/UG LVR BPS
LG0202L1200JL6	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	N/A
LG0202L1200JLC	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	N/A
LG0816B1100JLT	U5871-XL-100-5T9-AMS	RL	#4-250 kcmil	#4-250 kcmil	Lever	Yes	100A 5J RGLS LVRBPS MTRMAIN OH/UG 7/8BL
LG0816B1200JLT	U5871-XL-200-5T9-AMS	RL	#4-250 kcmil	#4-250 kcmil	Lever	Yes	200A 5J RGLS LVRBPS MTRMAIN OH/UG 7/8BL
LG0816B1100RBT	N/A	RL	#6-350kcmil	#6-350kcmil	Horn	No	TALON 100A 8S/16C MTR COMB OH/UG HRNBPS
LG0816B1125RBT	N/A	RL	#6-350kcmil	#6-350kcmil	Horn	No	TALON 125A 8S/16C MTR COMB OH/UG HRNBPS
LG0816B1150RBT	N/A	RL	#6-350kcmil	#6-350kcmil	Horn	No	TALON 200A 8S/16C MTR COMB OH/UG HRNBPS
T0816B1150RBT	N/A	RL	#6-350kcmil	#6-350kcmil	Horn	No	TALON MC 150A RGLS 5J HRNBPS 8 CKT
LG0816B1200RBT	N/A	RL	#6-350kcmil	#6-350kcmil	Horn	No	TALON 150A 8S/16C MTR COMB OH/UG HRNBPS
T0816B1200RBT	N/A	RL	#6-350kcmil	#6-350kcmil	Horn	No	TALON MC 200A RGLS 5J HRNBPS 8 CKT

Utility Approval Reference

Pg.	Amps	Term.	5th Term.	Pos.	Talon Catalog No.	A	B	C	D	E	F	G	H	I	J	K	L
						AEC	ALE	AMER	AE	CILC	CIPS	IPC	KCPL	MAEC	NPU	PE	UE
19	320	4	avail	1	LG0816B1400RLT			O/U		O/U	O/U	O/U					O/U
20	200	7	N/A	1	LG0303B3200JLC			O/U		O/U	O/U	O/U					O/U
20	200	7	N/A	1	LG0303CS3200R			O/U		O/U	O/U	O/U					O/U
20	200	7	N/A	1	LG0303CS3200RD			UG		UG	UG	UG					UG
24	200	5	avail	1	MPS0406B1200RJL			UG		UG	UG	UG					UG
24	200	5	6:00	1	MP0406B1200RJL			UG		UG	UG	UG					UG
24	100	5	6:00	1	MPS0406B1100JL												
24	200	5	6:00	1	MPS0406B1200JL			UG		UG	UG	UG					UG
28	200	5	9:00	2	404052-223MR			O/U		O/U	O/U	O/U					O/U
28	200	5	9:00	3	404053-223MR			O/U		O/U	O/U	O/U					O/U
28	200	5	9:00	4	404054-223MR			O/U		O/U	O/U	O/U					O/U
28	200	5	9:00	5	404055-223MR			O/U		O/U	O/U	O/U					O/U
28	200	5	9:00	6	404056-223MR			O/U		O/U	O/U	O/U					O/U
28	125	N/A	N/A	N/A	TLXXXH2M									UG			
28	125	N/A	N/A	N/A	TLXXXH2P		UG							UG			
28	125	N/A	N/A	N/A	TLXXXHB		UG							UG			
28	125	N/A	N/A	N/A	TLXXXHM		UG							UG			
28	125	N/A	N/A	N/A	TLXXXHP		UG							UG			
28	125	N/A	N/A	N/A	TLXXXHT		OH							OH			
28	125	N/A	N/A	N/A	TLXXXLT		OH							OH			
N/A	200	7	N/A	2	404072-023MR			O/U		O/U	O/U	O/U					O/U
N/A	200	7	N/A	3	404073-023MR			O/U		O/U	O/U	O/U					O/U
N/A	200	7	N/A	4	404074-223MR			O/U		O/U	O/U	O/U					O/U
N/A	200	7	N/A	5	404075-223MR			O/U		O/U	O/U	O/U					O/U
N/A	200	7	N/A	6	404076-223MR			O/U		O/U	O/U	O/U					O/U
0	0	0	0:00	0	9804-8947		O/U										
0	0	0	0:00	0	LG0404L1400RLT			O/U		O/U	O/U	O/U					O/U

Key
OH = Overhead feed only
UG = Underground feed only
O/U = Overhead (or) underground feed approved

- A) Adams Electric Coop
- B) Alliant Energy
- C) Ameren
- D) Aquila Electric
- E) Central Illinois Light Co.
- F) Central Illinois Public Service
- G) Illinois Power Co.
- H) Kansas City Power & Light
- I) MidAmerican Energy Co.
- J) Naperville Public Utilities
- K) Peru Electric
- L) Union Electric

Utility Approval Reference

Talon Catalog No.	Milbank Catalog No.	Ring vs. RL	Lugs Line Side	Lugs Load Side	BPS	Brl Lock	Description
LG0816B1400RLT	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	TALON 400A 4J RGLS 8S/16C MTRCMB OH/UG
LG0303B3200JLC	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	N/A
LG0303CS3200R	N/A	RL	#6-350kcmil	#6-350kcmil	None	No	TALON 200A CS MTR MAIN OH/UG LVR BPS
LG0303CS3200RD	N/A	RL	#6-350kcmil	#6-350kcmil	None	No	TALON 200A CS MTR MAIN UG ONLY LVR BPS
MPS0406B1200RJL	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	N/A
MP0406B1200RJL	N/A	RL	(2) #6-350 kcmil	#8-250 kcmil	Lever	Yes	200A 5J 04/06 RGLS 1POS MTRPED LVRBPS UG 7/16BL
MPS0406B1100JL	U5701-0-1005-5T9-AMS	RL	(2) #6-350 kcmil	#8-250 kcmil	Lever	Yes	100A 4SP/6CIR RGLS 1POS MTRPED LVR BPS UG 7/16BL
MPS0406B1200JL	U5701-0-2005-5T9-AMS	RL	(2) #6-350 kcmil	#8-250 kcmil	Lever	Yes	200A 4SP/6CIR RGLS 1POS MTRPED LVR BPS UG 7/16BL
404052-223MR	U2872-XT-QG-AMS	RL	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 5J RGLS 2POS LVRBPS MS OH/UG 7/16BL
404053-223MR	U2873-XT-QG-AMS	RL	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 5J RGLS 3POS LVRBPS MS OH/UG 7/16BL
404054-223MR	U2874-XT-QG-AMS	RL	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 5J RGLS 4POS LVRBPS MS OH/UG 7/16BL
404055-223MR	U2875-XT-QG-AMS	RL	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 5J RGLS 5POS LVRBPS MS OH/UG 7/16BL
404056-223MR	U2876-XT-QG-AMS	RL	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 5J RGLS 6POS LVRBPS MS OH/UG 7/16BL
TLXXXH2M	N/A	RL	See Table	See Table	Horn	No	Metered Ringless Pad Mount Double Sided Horn Bypass
TLXXXH2P	N/A	RL	See Table	See Table	Horn	No	Metered Ringless Direct Burial Double Sided Horn Bypass
TLXXXHB	N/A	RL	See Table	See Table	Horn	No	Metered Ringless Bottom Feed Horn Bypass
TLXXXHM	N/A	RL	See Table	See Table	Horn	No	Metered Ringless Pad Mount Horn Bypass
TLXXXHP	N/A	RL	See Table	See Table	Horn	No	Metered Ringless Direct Burial Horn Bypass
TLXXXHT	N/A	RL	See Table	See Table	Horn	No	Metered Ringless Top Feed Horn Bypass
TLXXXLT	N/A	RL	See Table	See Table	Lever	No	Metered Ringless Top Feed Lever Bypass
404072-223MR	U2732-XT	RL	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 7J RGLS 2POS LVRBPS MS OH/UG 7/16BL
404073-223MR	U2733-XT	RL	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 7J RGLS 3POS LVRBPS MS OH/UG 7/16BL
404074-223MR	U2734-XT	RL	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 7J RGLS 4POS LVRBPS MS OH/UG 7/16BL
404075-223MR	U2735-XT	RL	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 7J RGLS 5POS LVRBPS MS OH/UG 7/16BL
404076-223MR	U2736-XT	RL	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	Yes	200A 7J RGLS 6POS LVRBPS MS OH/UG 7/16BL
9804-8947	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	N/A
LG0404L1400RLT	N/A	RL	#6-350kcmil	#6-350kcmil	Lever	No	N/A



Represented by:

CBM, Inc.
6220 Blue Ridge Cut-Off
Suite 100
Kansas City, MO 64133
Telephone: 816-353-6011
FAX: 816-353-7277

**Published by
Siemens 2018**

Talon Meter Mounting Devices
Siemens Industry, Inc.
5400 Triangle Parkway
Norcross, GA 30092

1-800-241-4453
info.us@siemens.com

Order No. RPSA-LG027-0118
Printed in USA
All Rights Reserved
© 2018, Siemens Industry, Inc.
www.talonmetering.com

The technical data presented in this document is based on an actual case or on as-designed parameters, and therefore should not be relied upon for any specific application and does not constitute a performance guarantee for any projects. Actual results are dependent on variable conditions. Accordingly, Siemens does not make representations, warranties, or assurances as to the accuracy, currency or completeness of the content contained herein. If requested, we will provide specific technical data or specifications with respect to any customer's particular applications. Our company is constantly involved in engineering and development. For that reason, we reserve the right to modify, at any time, the technology and product specifications contained herein.