

ET 200pro DSE ST DOL starter Standard Mechanical switching  
 Electronic overload protection AC-3, 0.9 kW / 400 V 0.15 A...2.00 A  
 Brake contact 400 V AC Han Q4/2 - Han Q8/0



Figure similar

Product brand name	SIMATIC
Product designation	Motor starters
Design of the product	direct starter
Product type designation	ET 200pro

General technical data	
Trip class	CLASS 10
Product function	
• on-site operation	Yes
Insulation voltage	
• rated value	400 V
Degree of pollution	3
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	400 V
Protection class IP	IP65
Shock resistance	15g / 11 ms
Vibration resistance	2g
Mechanical service life (switching cycles)	

• of the main contacts typical	30 000 000
<b>Type of assignment</b>	1
<b>Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750</b>	A
<b>Reference code acc. to DIN EN 81346-2</b>	Q
<b>Reference code acc. to DIN EN 61346-2</b>	Q
<b>Product function</b>	
• direct start	Yes
• reverse starting	No
<b>Product component Motor brake output</b>	Yes
<b>Product feature</b>	
• brake control with 230 V AC	No
• brake control with 400 V AC	Yes
• brake control with 24 V DC	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No
<b>Type of voltage of the supply voltage for brake control required</b>	AC
<b>Supply voltage for brake control required</b>	400 V
<b>Product function Short circuit protection</b>	Yes
<b>Design of short-circuit protection</b>	fuse
<b>Maximum short-circuit current breaking capacity (Icu)</b>	
• at 400 V rated value	100 000 A

#### Safety related data

<b>B10 value</b>	
• with high demand rate acc. to SN 31920	1 000 000
<b>Proportion of dangerous failures</b>	
• with low demand rate acc. to SN 31920	50 %
• with high demand rate acc. to SN 31920	75 %
<b>Failure rate [FIT]</b>	
• with low demand rate acc. to SN 31920	100 FIT
<b>T1 value for proof test interval or service life acc. to IEC 61508</b>	20 y
<b>Protection against electrical shock</b>	finger-safe

#### Main circuit

<b>Number of poles for main current circuit</b>	3
<b>Design of the switching contact</b>	electromechanical
<b>Adjustable pick-up value current of the current-dependent overload release</b>	0.15 ... 2 A
<b>Type of the motor protection</b>	solid-state
<b>Type of voltage</b>	AC
<b>Operating voltage</b>	

• rated value	200 ... 400 V
<b>Operating range relative to the operating voltage at AC</b>	
• at 50 Hz	200 ... 440 V
<b>Operating current</b>	
• at AC at 400 V rated value	2 A
• at AC-3	
— at 400 V rated value	2 A
<b>Operating power</b>	
• at AC-3	
— at 400 V rated value	900 W
Operating power for three-phase motors at 400 V at 50 Hz	70 ... 900 W

### Inputs/ Outputs

<b>Product function</b>	
• digital inputs parameterizable	No
• digital outputs parameterizable	No
<b>Number of digital inputs</b>	0
<b>Number of sockets</b>	
• for digital output signals	0
• for digital input signals	0

### Supply voltage

<b>Type of voltage of the supply voltage</b>	DC
<b>Supply voltage 1 at DC</b>	24 ... 24 V
<b>Supply voltage 1 at DC rated value</b>	
• minimum permissible	20.4 V
• maximum permissible	28.8 V

### Control circuit/ Control

<b>Type of voltage of the control supply voltage</b>	DC
<b>Control supply voltage at DC</b>	
• rated value	20.4 ... 28.8 V
<b>Control supply voltage 1</b>	
• at DC rated value	20.4 ... 28.8 V
• at DC	24 ... 24 V
<b>Power loss [W] in auxiliary and control circuit</b>	
• <b>in switching state OFF</b>	
— with bypass circuit	1.6416 W
— without bypass circuit	1.6416 W
• <b>in switching state ON</b>	
— with bypass circuit	3.888 W
— without bypass circuit	3.888 W

Installation/ mounting/ dimensions	
<b>Mounting position</b>	vertical, horizontal
<b>Mounting type</b>	screw fixing
<b>Height</b>	230 mm
<b>Width</b>	110 mm
<b>Depth</b>	150 mm

Ambient conditions	
<b>Installation altitude at height above sea level</b>	
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	3 500 m
<b>Ambient temperature</b>	
<ul style="list-style-type: none"> <li>• during operation</li> </ul>	-25 ... +55 °C
<ul style="list-style-type: none"> <li>• during storage</li> </ul>	-40 ... +70 °C
<ul style="list-style-type: none"> <li>• during transport</li> </ul>	-40 ... +70 °C
Relative humidity during operation	5 ... 95 %

Communication/ Protocol	
<b>Protocol is supported</b>	
<ul style="list-style-type: none"> <li>• PROFIBUS DP protocol</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• PROFINET protocol</li> </ul>	Yes
<b>Design of the interface</b>	
<ul style="list-style-type: none"> <li>• PROFINET protocol</li> </ul>	Yes
<b>Product function Bus communication</b>	Yes
<b>Protocol is supported</b>	
<ul style="list-style-type: none"> <li>• AS-Interface protocol</li> </ul>	No
<b>Product function</b>	
<ul style="list-style-type: none"> <li>• supports PROFIenergy measured values</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• supports PROFIenergy shutdown</li> </ul>	Yes
<b>address range memory of address range</b>	
<ul style="list-style-type: none"> <li>• of the inputs</li> </ul>	2 byte
<ul style="list-style-type: none"> <li>• of the outputs</li> </ul>	2 byte
<b>Type of electrical connection</b>	
<ul style="list-style-type: none"> <li>• of the communication interface</li> </ul>	via backplane bus

Connections/ Terminals	
<b>Type of electrical connection</b>	
<ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>	tab terminals
<b>Type of electrical connection</b>	
<ul style="list-style-type: none"> <li>• 1 for digital input signals</li> </ul>	M12 socket
<ul style="list-style-type: none"> <li>• 2 for digital input signals</li> </ul>	M12 socket
<ul style="list-style-type: none"> <li>• 3 for digital input signals</li> </ul>	M12 socket
<ul style="list-style-type: none"> <li>• 4 for digital input signals</li> </ul>	M12 socket
<b>Type of electrical connection</b>	
<ul style="list-style-type: none"> <li>• at the manufacturer-specific device interface</li> </ul>	optical interface

- for main energy infeed
- for load-side outgoing feeder
- for main energy transmission
- for supply voltage line-side
- for supply voltage transmission

socket according to ISO23570  
 socket according to ISO23570  
 socket according to ISO23570  
 via backplane bus  
 via backplane bus

### UL/CSA ratings

#### Operating voltage

- at AC at 60 Hz acc. to CSA and UL rated value 600 V

### Certificates/ approvals

General Product Approval		EMC	Declaration of Conformity
 CCC	 CSA	 UL	 EAC
		 RCM	 EG-Konf.

Declaration of Conformity	Test Certificates	other
<a href="#">Miscellaneous</a>	<a href="#">Type Test Certificates/Test Report</a>	<a href="#">Confirmation</a>

### Further information

#### Information- and Downloadcenter (Catalogs, Brochures,...)

[www.siemens.com/sirius/catalogs](http://www.siemens.com/sirius/catalogs)

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-5KS40-4AA3>

#### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1304-5KS40-4AA3>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-5KS40-4AA3>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK1304-5KS40-4AA3&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1304-5KS40-4AA3&lang=en)

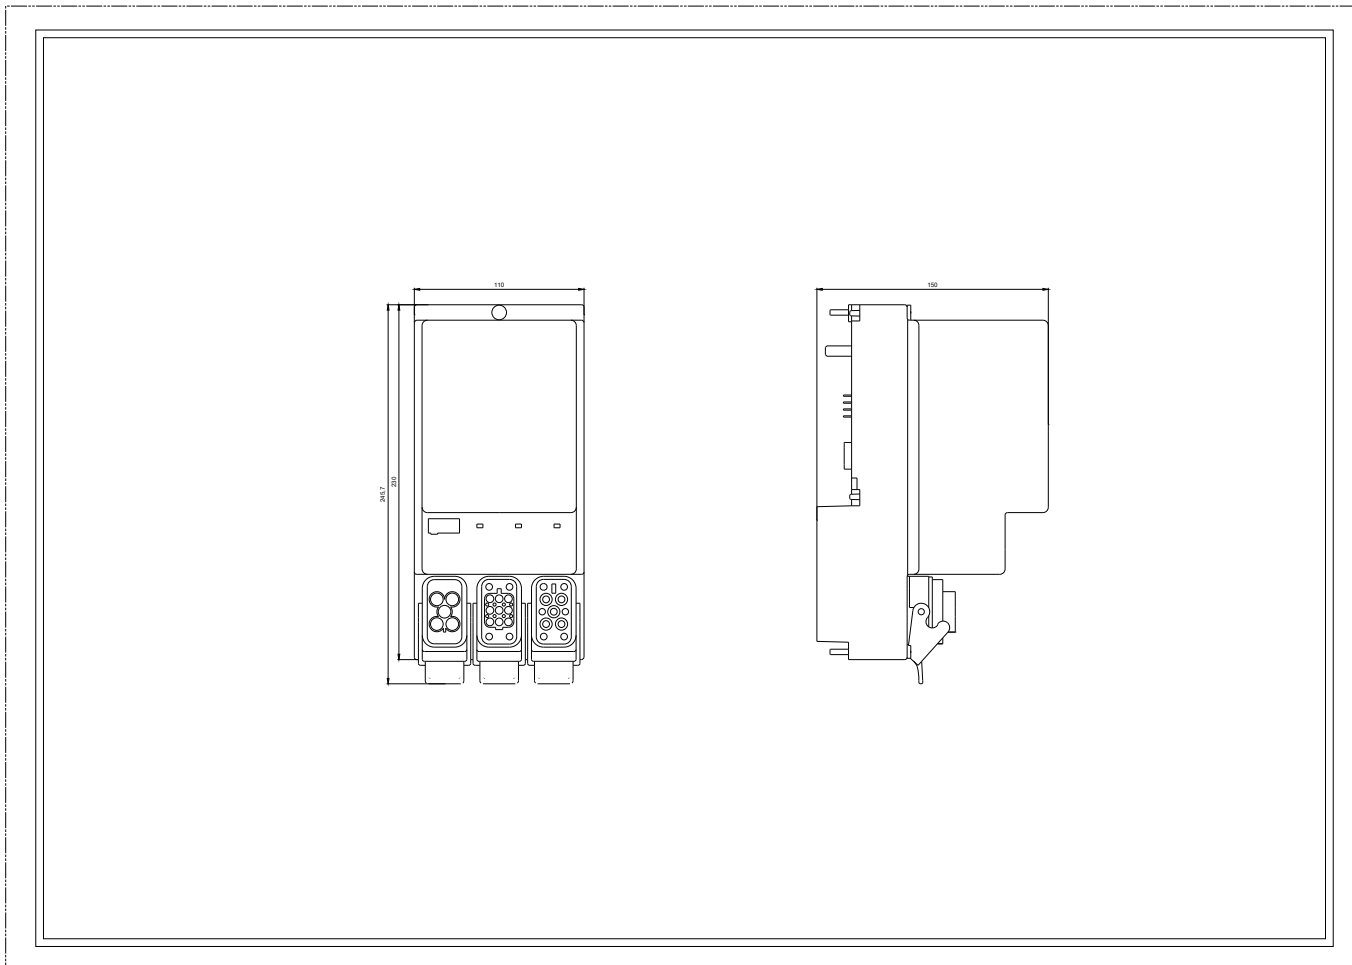

last modified:

11/15/2019