

ET 200pro DSE HF DOL starter High Feature Mechanical switching
 Electronic overload protection AC-3, 5.5 kW / 400 V 1.50 A...12.00 A
 Brake contact 400 V AC 4 DI Han Q4/2 - Han Q8/0



Figure similar

Product brand name	SIMATIC
Product designation	Motor starters
Design of the product	direct starter
Product type designation	ET 200pro

General technical data	
Trip class	CLASS 10
Product function	
• on-site operation	Yes
Insulation voltage	
• rated value	400 V
Degree of pollution	3
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	400 V
Protection class IP	IP65
Shock resistance	15g / 11 ms
Vibration resistance	2g
Mechanical service life (switching cycles)	

• of the main contacts typical	30 000 000
Type of assignment	1
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	A
Reference code acc. to DIN EN 81346-2	Q
Reference code acc. to DIN EN 61346-2	Q
Product function	
• direct start	Yes
• reverse starting	No
Product component Motor brake output	Yes
Product feature	
• brake control with 230 V AC	No
• brake control with 400 V AC	Yes
• brake control with 24 V DC	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No
Type of voltage of the supply voltage for brake control required	AC
Supply voltage for brake control required	400 V
Product function Short circuit protection	Yes
Design of short-circuit protection	fuse
Maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	100 000 A

Safety related data

B10 value	
• with high demand rate acc. to SN 31920	1 000 000
Proportion of dangerous failures	
• with low demand rate acc. to SN 31920	50 %
• with high demand rate acc. to SN 31920	75 %
Failure rate [FIT]	
• with low demand rate acc. to SN 31920	100 FIT
T1 value for proof test interval or service life acc. to IEC 61508	20 y
Protection against electrical shock	finger-safe

Main circuit

Number of poles for main current circuit	3
Design of the switching contact	electromechanical
Adjustable pick-up value current of the current-dependent overload release	1.5 ... 12 A
Type of the motor protection	solid-state
Type of voltage	AC
Operating voltage	

• rated value	200 ... 400 V
Operating range relative to the operating voltage at AC	
• at 50 Hz	200 ... 440 V
Operating current	
• at AC at 400 V rated value	12 A
• at AC-3	
— at 400 V rated value	12 A
Operating power	
• at AC-3	
— at 400 V rated value	5 500 W
Operating power for three-phase motors at 400 V at 50 Hz	700 ... 5 500 W

Inputs/ Outputs

Product function	
• digital inputs parameterizable	Yes
• digital outputs parameterizable	No
Number of digital inputs	4
Number of sockets	
• for digital output signals	0
• for digital input signals	4

Supply voltage

Type of voltage of the supply voltage	DC
Supply voltage 1 at DC	24 ... 24 V
Supply voltage 1 at DC rated value	
• minimum permissible	20.4 V
• maximum permissible	28.8 V

Control circuit/ Control

Type of voltage of the control supply voltage	DC
Control supply voltage at DC	
• rated value	20.4 ... 28.8 V
Control supply voltage 1	
• at DC rated value	20.4 ... 28.8 V
• at DC	24 ... 24 V
Power loss [W] in auxiliary and control circuit	
• in switching state OFF	
— with bypass circuit	1.6416 W
— without bypass circuit	1.656 W
• in switching state ON	
— with bypass circuit	3.888 W
— without bypass circuit	3.888 W

Installation/ mounting/ dimensions	
Mounting position	vertical, horizontal
Mounting type	screw fixing
Height	230 mm
Width	110 mm
Depth	150 mm

Ambient conditions	
Installation altitude at height above sea level	
<ul style="list-style-type: none"> • maximum 	3 500 m
Ambient temperature	
<ul style="list-style-type: none"> • during operation 	-25 ... +55 °C
<ul style="list-style-type: none"> • during storage 	-40 ... +70 °C
<ul style="list-style-type: none"> • during transport 	-40 ... +70 °C
Relative humidity during operation	5 ... 95 %

Communication/ Protocol	
Protocol is supported	
<ul style="list-style-type: none"> • PROFIBUS DP protocol 	Yes
<ul style="list-style-type: none"> • PROFINET protocol 	Yes
Design of the interface	
<ul style="list-style-type: none"> • PROFINET protocol 	Yes
Product function Bus communication	Yes
Protocol is supported	
<ul style="list-style-type: none"> • AS-Interface protocol 	No
Product function	
<ul style="list-style-type: none"> • supports PROFIenergy measured values 	Yes
<ul style="list-style-type: none"> • supports PROFIenergy shutdown 	Yes
address range memory of address range	
<ul style="list-style-type: none"> • of the inputs 	2 byte
<ul style="list-style-type: none"> • of the outputs 	2 byte
Type of electrical connection	
<ul style="list-style-type: none"> • of the communication interface 	via backplane bus

Connections/ Terminals	
Type of electrical connection	
<ul style="list-style-type: none"> • for main current circuit 	tab terminals
Type of electrical connection	
<ul style="list-style-type: none"> • 1 for digital input signals 	M12 socket
<ul style="list-style-type: none"> • 2 for digital input signals 	M12 socket
<ul style="list-style-type: none"> • 3 for digital input signals 	M12 socket
<ul style="list-style-type: none"> • 4 for digital input signals 	M12 socket
Type of electrical connection	
<ul style="list-style-type: none"> • at the manufacturer-specific device interface 	optical interface

- for main energy infeed
- for load-side outgoing feeder
- for main energy transmission
- for supply voltage line-side
- for supply voltage transmission

socket according to ISO23570
 socket according to ISO23570
 socket according to ISO23570
 via backplane bus
 via backplane bus

UL/CSA ratings

Operating voltage

- at AC at 60 Hz acc. to CSA and UL rated value 600 V

Certificates/ approvals

General Product Approval			EMC	Declaration of Conformity
 CCC	 CSA	 UL	 EAC	 RCM
			 EG-Konf.	

Declaration of Conformity	Test Certificates	other
Miscellaneous	Type Test Certificates/Test Report	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-5LS40-2AA3>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1304-5LS40-2AA3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-5LS40-2AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1304-5LS40-2AA3&lang=en

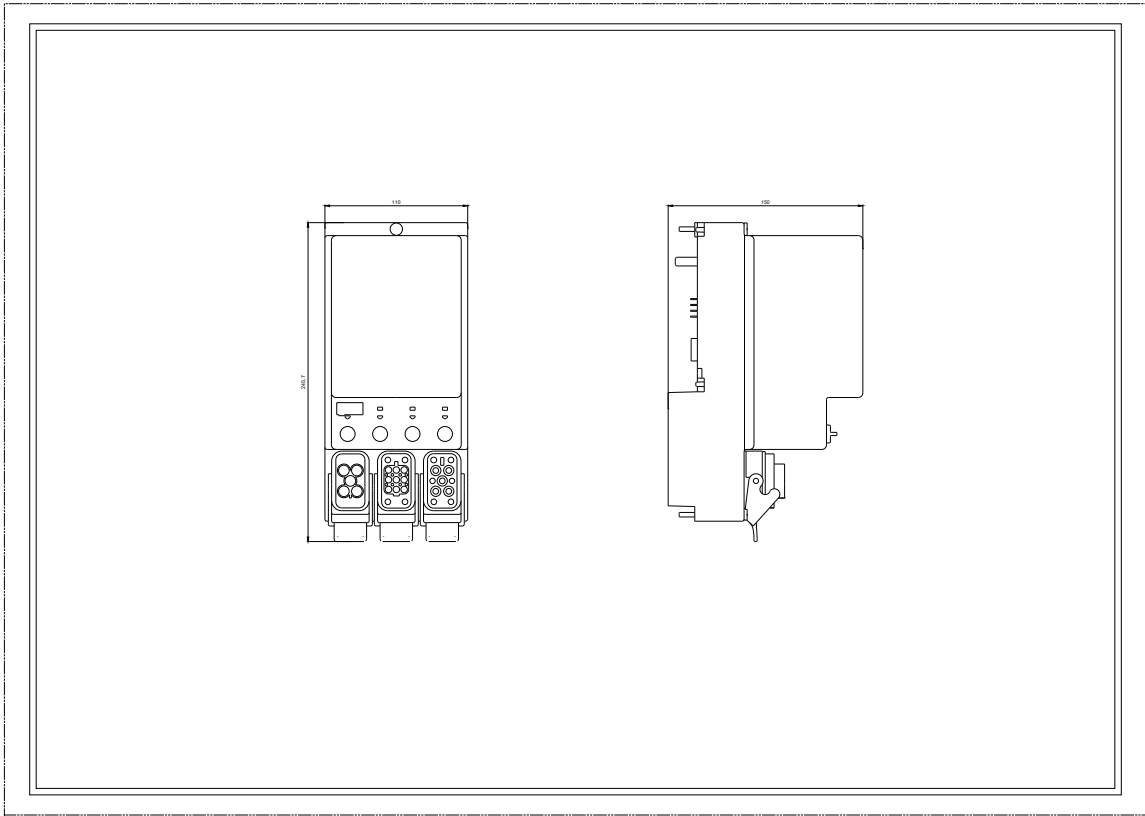

last modified:

11/15/2019