

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P36F15M-XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD:
UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:
- MONITORED OUTLET
VERTICAL, 0U FULL
(30) C13, (6) C19
200-240VAC
30A (24A DERATED)
(2) 20AMP, DOUBLE-POLE
SINGLE-PHASE
5.0 kVA
NEMA L6-30P
SEE SHEET 2 FOR PART NUMBER TABLE
RoHS COMPLIANT


2. ADDITIONAL:
NONE
3. ACCESSORIES:
(1) QUICK-START GUIDE

NOTES:


1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P36F15M-XX Y Z

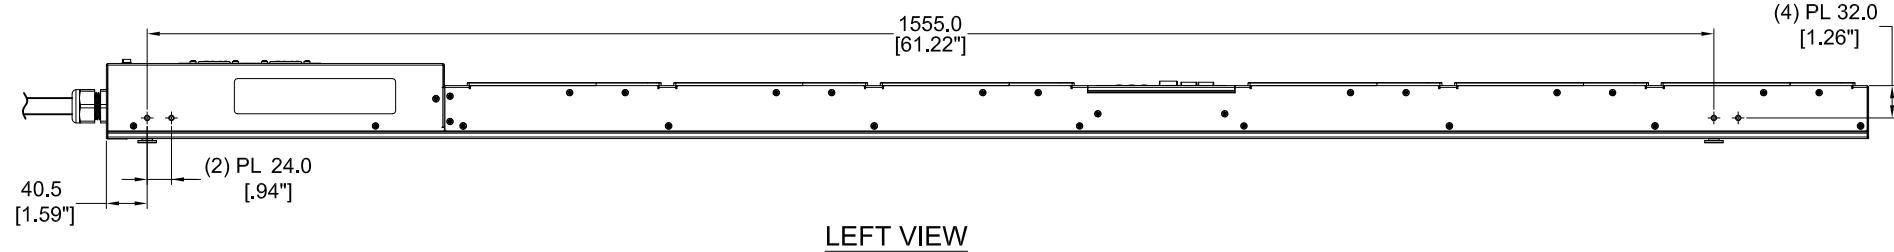


LEFT VIEW

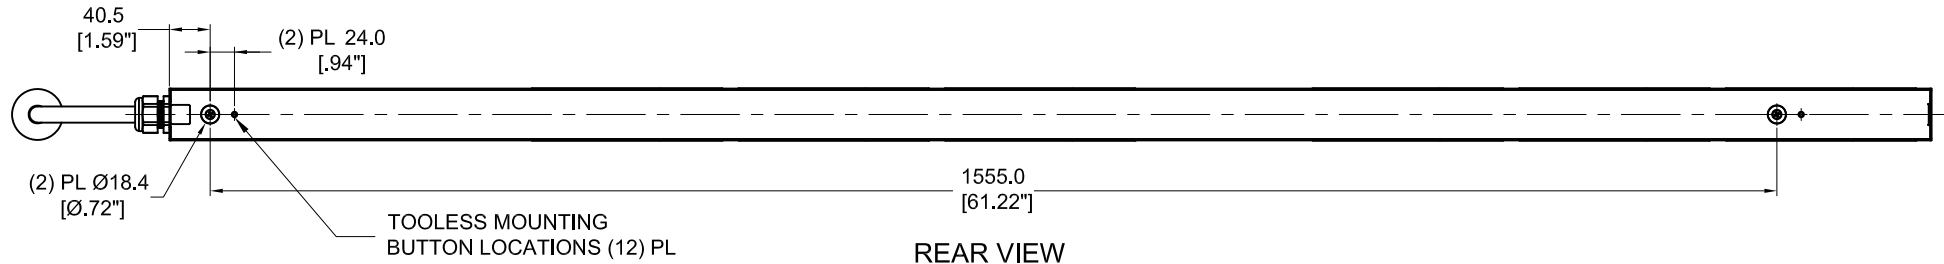


REAR VIEW

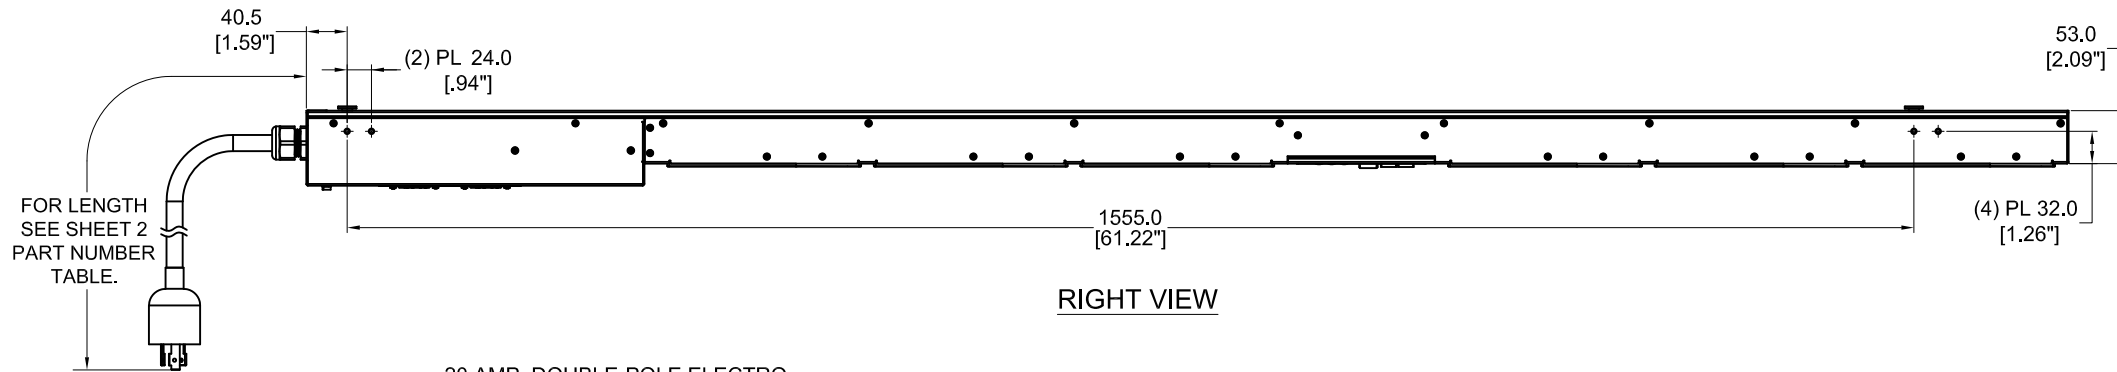

RIGHT VIEW

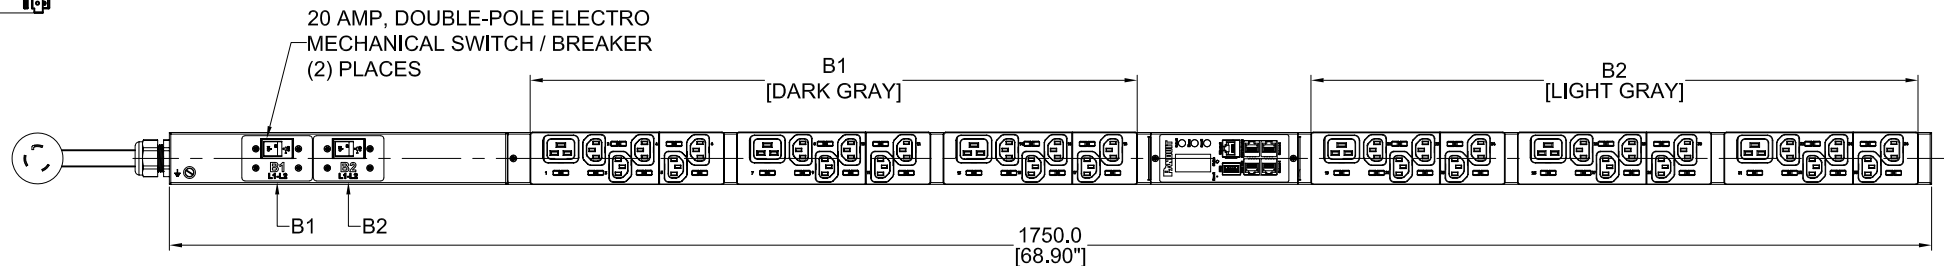

FRONT VIEW



BOTTOM VIEW

XX: FINISHED GOOD COLOR
BL =BLACK
RD =RED
WH =WHITE
YL =YELLOW
BU =BLUE
GN =GREEN

Y: INPUT FEED TYPE
1 =TOP-END FED
2 =BOTTOM-END FED

Z: INPUT CORD LENGTH
A =1 METER
B =2 METER
C =3 METER

PLUG/RECEPTACLE BLOCK



PLUG
NEMA L6 - 30P, 2P 3W
30A, 250V MAX RATED INPUT
24A DERATED



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36F15M
01A	10/18/2017	WSJ	MIM	EDM	INITIAL RELEASE	P36F15M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P36F15M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME		PANDUIT	
DATASHEET FILE NAME:		MATERIAL/COLOR: N/A	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P36F15M_DC	
DRAWN BY WSJ	DATE 10/18/2017	CHK SEAN	SCALE NONE
SHT 1 OF 2		SCALE B	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

[illegible]

WE ASK THAT YOU CHECK FULLY THE
DIMENSIONS, NOTES, AND SIGN THE CLIENT
SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT
SIGNED APPROVAL. PLEASE DO NOT DELAY
IN RETURNING PROOF AS IT WILL AFFECT
DELIVERY

SIGN

DATE _____

PRINT

TITLE

INTELLIGENT SERIES PDU
P36F15M-XXYZ

CUSTOMER DRAWING

ITEM	REVISION	NAME
1	1	1

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

	MATERIAL/COLOR:
--	-----------------

N/A

DRAWING NUMBER:

P36F15M DC

	DRAWN BY	DATE
--	----------	------

BY	DATE
----	------

CHK

CHK

	SCA
--	-----

	SCALE
--	-------

SHT 2 OF 2

SCA

02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36F15M
01A	10/18/2017	WSJ	MIM	EDM	INITIAL RELEASE	P36F15M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN