

CONTACTOR, AC-3 37 KW/400 V, AC 480 V, 60 HZ, 3-POLE, SIZE S3, SCREW CONNECTION



Figure similar

| | |
|---|-------------------------|
| product brandname | SIRIUS |
| Product designation | power contactor |
| General technical data | |
| Size of contactor | S3 |
| Insulation voltage | |
| • rated value | 1 000 V |
| Degree of pollution | 3 |
| Surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for safe isolation | |
| • between coil and main contacts acc. to EN 60947-1 | 690 V |
| Protection class IP | |
| • on the front | IP00 |
| • of the terminal | IP00 |
| Shock resistance | |
| • at rectangular impulse | |
| — at AC | 6,8g / 5 ms, 4g / 10 ms |

| | |
|---|--|
| <ul style="list-style-type: none"> • with sine pulse <ul style="list-style-type: none"> — at AC | 10,6g / 5 ms, 6,2g / 10 ms |
| Mechanical service life (switching cycles) | |
| <ul style="list-style-type: none"> • of contactor typical | 10 000 000 |
| <ul style="list-style-type: none"> • of the contactor with added electronics-compatible auxiliary switch block typical | 5 000 000 |
| <ul style="list-style-type: none"> • of the contactor with added auxiliary switch block typical | 10 000 000 |
| Ambient conditions | |
| Installation altitude at height above sea level maximum | 2 000 m |
| Ambient temperature | |
| <ul style="list-style-type: none"> • during operation | -25 ... +60 °C |
| <ul style="list-style-type: none"> • during storage | -55 ... +80 °C |
| Main circuit | |
| Number of poles for main current circuit | 3 |
| Number of NO contacts for main contacts | 3 |
| Number of NC contacts for main contacts | 0 |
| Operating current | |
| <ul style="list-style-type: none"> • at AC-1 at 400 V <ul style="list-style-type: none"> — at ambient temperature 40 °C rated value | 120 A |
| <ul style="list-style-type: none"> • at AC-1 <ul style="list-style-type: none"> — up to 690 V at ambient temperature 40 °C rated value — up to 690 V at ambient temperature 60 °C rated value — up to 1000 V at ambient temperature 40 °C rated value — up to 1000 V at ambient temperature 60 °C rated value | 120 A 100 A 60 A 50 A |
| <ul style="list-style-type: none"> • at AC-3 <ul style="list-style-type: none"> — at 400 V rated value — at 690 V rated value — at 1000 V rated value | 80 A 58 A 30 A |
| Connectable conductor cross-section in main circuit at AC-1 | |
| <ul style="list-style-type: none"> • at 60 °C minimum permissible • at 40 °C minimum permissible | 35 mm ² 50 mm ² |
| Operating current for approx. 200000 operating cycles at AC-4 | |
| <ul style="list-style-type: none"> • at 400 V rated value • at 690 V rated value | 34 A 22 A |
| Operating current | |

| | |
|---|--|
| <ul style="list-style-type: none"> • at 1 current path at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value • with 2 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value • with 3 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value | <p>100 A</p> <p>9 A</p> <p>100 A</p> <p>100 A</p> <p>100 A</p> <p>100 A</p> |
| <p>Operating current</p> <ul style="list-style-type: none"> • at 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value • with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 110 V rated value — at 24 V rated value • with 3 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 110 V rated value — at 24 V rated value | <p>40 A</p> <p>2.5 A</p> <p>100 A</p> <p>100 A</p> <p>100 A</p> <p>100 A</p> |
| <p>Operating power</p> <ul style="list-style-type: none"> • at AC-1 <ul style="list-style-type: none"> — at 230 V at 60 °C rated value — at 400 V rated value — at 690 V rated value — at 690 V at 60 °C rated value — at 1000 V at 60 °C rated value • at AC-2 at 400 V rated value • at AC-3 <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 1000 V rated value | <p>38 kW</p> <p>66 kW</p> <p>114 kW</p> <p>114 kW</p> <p>82 W</p> <p>37 kW</p> <p>22 kW</p> <p>37 kW</p> <p>45 kW</p> <p>55 kW</p> <p>37 W</p> |
| <p>Operating power for approx. 200000 operating cycles at AC-4</p> <ul style="list-style-type: none"> • at 400 V rated value • at 690 V rated value | <p>17.9 kW</p> <p>21.1 kW</p> |
| <p>Thermal short-time current limited to 10 s</p> | <p>760 A</p> |
| <p>Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor</p> | <p>7.7 W</p> |
| <p>No-load switching frequency</p> <ul style="list-style-type: none"> • at AC | <p>5 000 1/h</p> |

| | |
|----------------------------|-----------|
| Operating frequency | |
| • at AC-1 maximum | 900 1/h |
| • at AC-2 maximum | 400 1/h |
| • at AC-3 maximum | 1 000 1/h |
| • at AC-4 maximum | 300 1/h |

Control circuit/ Control






| | |
|---|--------------|
| Type of voltage of the control supply voltage | AC |
| Control supply voltage at AC | |
| • at 60 Hz rated value | 480 V |
| Control supply voltage frequency 1 rated value | 60 Hz |
| Operating range factor control supply voltage rated value of magnet coil at AC | |
| • at 60 Hz | 0.8 ... 1.1 |
| Apparent pick-up power of magnet coil at AC | 300 V·A |
| Inductive power factor with closing power of the coil | 0.52 |
| Apparent holding power of magnet coil at AC | 21 V·A |
| Inductive power factor with the holding power of the coil | 0.29 |
| Closing delay | |
| • at AC | 17 ... 90 ms |
| Opening delay | |
| • at AC | 10 ... 25 ms |
| Arcing time | 10 ... 15 ms |

Auxiliary circuit

| | |
|---|------|
| Number of NC contacts | |
| • for auxiliary contacts | |
| — instantaneous contact | 0 |
| Number of NO contacts | |
| • for auxiliary contacts | |
| — instantaneous contact | 0 |
| Operating current at AC-12 maximum | 10 A |
| Operating current at AC-15 | |
| • at 230 V rated value | 6 A |
| • at 400 V rated value | 3 A |
| Operating current at DC-12 | |
| • at 60 V rated value | 6 A |
| • at 110 V rated value | 3 A |
| • at 220 V rated value | 1 A |
| Operating current at DC-13 | |
| • at 24 V rated value | 10 A |
| • at 60 V rated value | 2 A |
| • at 110 V rated value | 1 A |

| | |
|--|---|
| <ul style="list-style-type: none"> • at 220 V rated value | 0.3 A |
| Contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |
| UL/CSA ratings | |
| Contact rating of auxiliary contacts according to UL | A600 / Q600 |
| Short-circuit protection | |
| Design of the fuse link | |
| <ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required | <p>fuse gL/gG: 250 A</p> <p>fuse gL/gG: 160 A</p> <p>fuse gL/gG: 10 A</p> |
| Installation/ mounting/ dimensions | |
| Mounting type | screw and snap-on mounting onto 35 mm and 75 mm standard mounting rail |
| <ul style="list-style-type: none"> • Side-by-side mounting | Yes |
| Height | 146 mm |
| Width | 70 mm |
| Depth | 139 mm |
| Required spacing | |
| <ul style="list-style-type: none"> • for grounded parts <ul style="list-style-type: none"> — at the side | 6 mm |
| Connections/Terminals | |
| Type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit • for auxiliary and control current circuit | <p>screw-type terminals</p> <p>screw-type terminals</p> |
| Type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — solid — stranded — single or multi-stranded — finely stranded with core end processing — finely stranded without core end processing • at AWG conductors for main contacts | <p>2x (2.5 ... 16 mm²)</p> <p>2x (10 ... 50 mm²)</p> <p>2x (2,5 ... 16 mm²)</p> <p>2x (2.5 ... 35 mm²)</p> <p>2x (10 ... 35 mm²)</p> <p>2x (10 ... 1/0)</p> |
| Type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing • at AWG conductors for auxiliary contacts | <p>2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)</p> <p>2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)</p> <p>2x (20 ... 16), 2x (18 ... 14), 1x 12</p> |
| Certificates/approvals | |

| General Product Approval | | | | Declaration of Conformity | Test Certificates |
|--|--|---|---|---|--|
|  CCC |  CSA |  UL |  |  EG-Konf. | spezielle Prüfbescheinigung n |

| Shipping Approval | | | | | other |
|--|---|--|---|---|-------------------------|
|  ABS |  GL |  LRS |  RINA |  RMRS | sonstig |

| other |
|---|
| Bestätigungen Umweltbestätigung |

Further information



Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1045-1AV60>

Cax online generator
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1045-1AV60>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3RT1045-1AV60>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1045-1AV60&lang=en

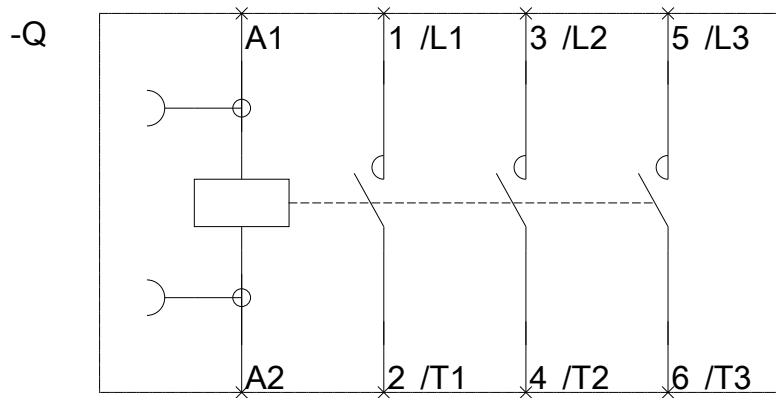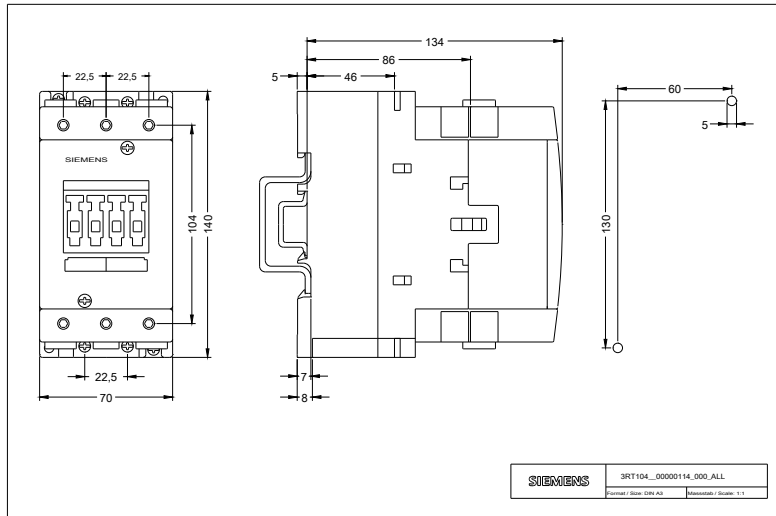

last modified:

12/26/2016