



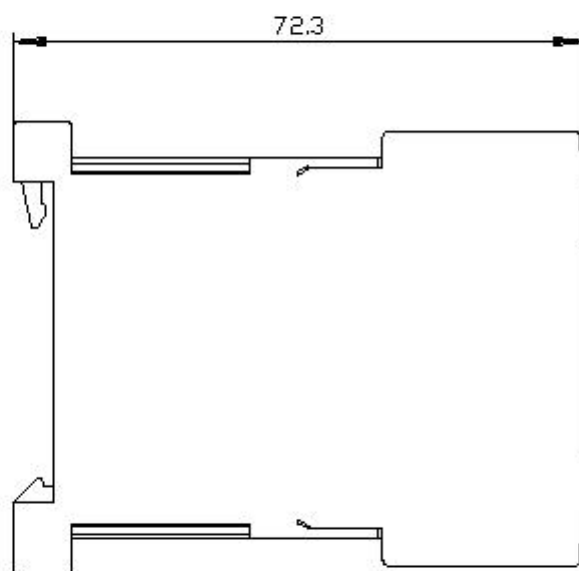

time-delay device fixed delay 24V DC accessory for: 3VA undervoltage release

Model	
product brand name	SENTRON
product designation	Accessories
Product version	Time-delay device
Accessories	Time-delay device
General technical data	
OFF delay time / minimum	100 ms
Voltage	
control supply voltage (Us) / at DC	24 V
Mechanical Design	
Height	57.5 mm
Width	44.8 mm
depth	72.3 mm
net weight	117 g
tightening torque / with screw-type terminals / minimum	0.8 N·m
tightening torque / with screw-type terminals / maximum	1.2 N·m
Connections according IEC	
stripped length	10 mm
AWG number / as coded connectable conductor cross section / for auxiliary contacts	
• minimum	20
• maximum	16
Connections according UL	
stripped length [in]	0.4 in
tightening torque [lbf·in] / with screw-type terminals / minimum	7.1 lbf·in
tightening torque [lbf·in] / with screw-type terminals / maximum	10.6 lbf·in
Further information	
<b>Information- and Downloadcenter (Catalogs, Brochures,...)</b> <a href="http://www.siemens.com/lowvoltage/catalogs">http://www.siemens.com/lowvoltage/catalogs</a>	
<b>Industry Mall (Online ordering system)</b> <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9988-0BF23">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9988-0BF23</a>	
<b>Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)</b> <a href="https://support.industry.siemens.com/cs/ww/en/ps/3VA9988-0BF23">https://support.industry.siemens.com/cs/ww/en/ps/3VA9988-0BF23</a>	
<b>Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)</b> <a href="http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0BF23">http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0BF23</a>	
<b>CAX-Online-Generator</b> <a href="http://www.siemens.com/cax">http://www.siemens.com/cax</a>	
<b>Tender specifications</b>	

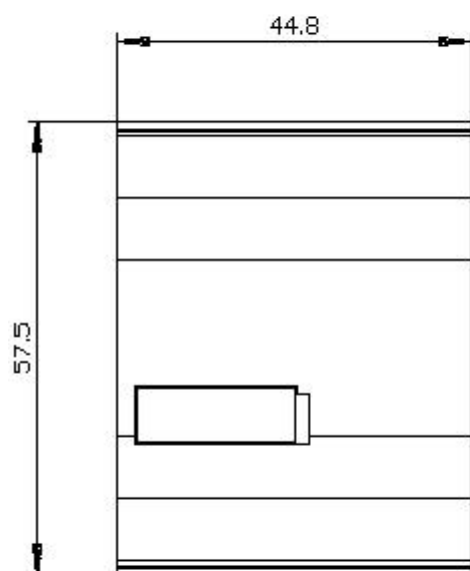

last modified:

12/20/2020 