

Wire connector 3 units Accessory for: 3VA52 250



Model	
product brand name	SETRON
product designation	accessories
General technical data	
designation / of the terminal	TA1.3
Connections according IEC	
connectable conductor cross-section	
<ul style="list-style-type: none"> <li>• for copper cable / stranded / minimum</li> <li>• for copper cable / stranded / maximum</li> <li>• for aluminum cable / solid / minimum</li> <li>• for aluminum cable / solid / maximum</li> <li>• for aluminum cable / stranded / minimum</li> <li>• for aluminum cable / stranded / maximum</li> </ul>	<ul style="list-style-type: none"> <li>1.5 mm<sup>2</sup></li> <li>50 mm<sup>2</sup></li> <li>4 mm<sup>2</sup></li> <li>16 mm<sup>2</sup></li> <li>4 mm<sup>2</sup></li> <li>50 mm<sup>2</sup></li> </ul>
stripped length	18 mm
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
connectable conductor cross-section	
<ul style="list-style-type: none"> <li>• for copper cable / solid / minimum</li> <li>• for copper cable / solid / maximum</li> <li>• for copper cable / stranded / minimum</li> <li>• for copper cable / stranded / maximum</li> <li>• for copper cable / finely stranded / minimum</li> <li>• for copper cable / finely stranded / maximum</li> <li>• for aluminum cable / stranded / maximum</li> </ul>	<ul style="list-style-type: none"> <li>14 AWG</li> <li>10 AWG</li> <li>14 AWG</li> <li>1/0 AWG</li> <li>14 AWG</li> <li>1/0 AWG</li> <li>1/0 AWG</li> </ul>
Further information	

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mifb=3VA9233-0JB11>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/ww/en/ps/3VA9233-0JB11>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mifb=3VA9233-0JB11](http://www.automation.siemens.com/bilddb/cax_en.aspx?mifb=3VA9233-0JB11)

**Tender specifications**

<http://www.siemens.com/specifications>

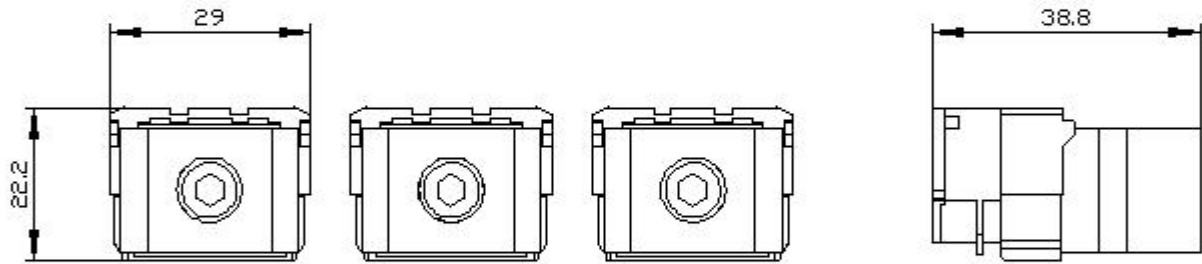

last modified:

12/20/2020 