



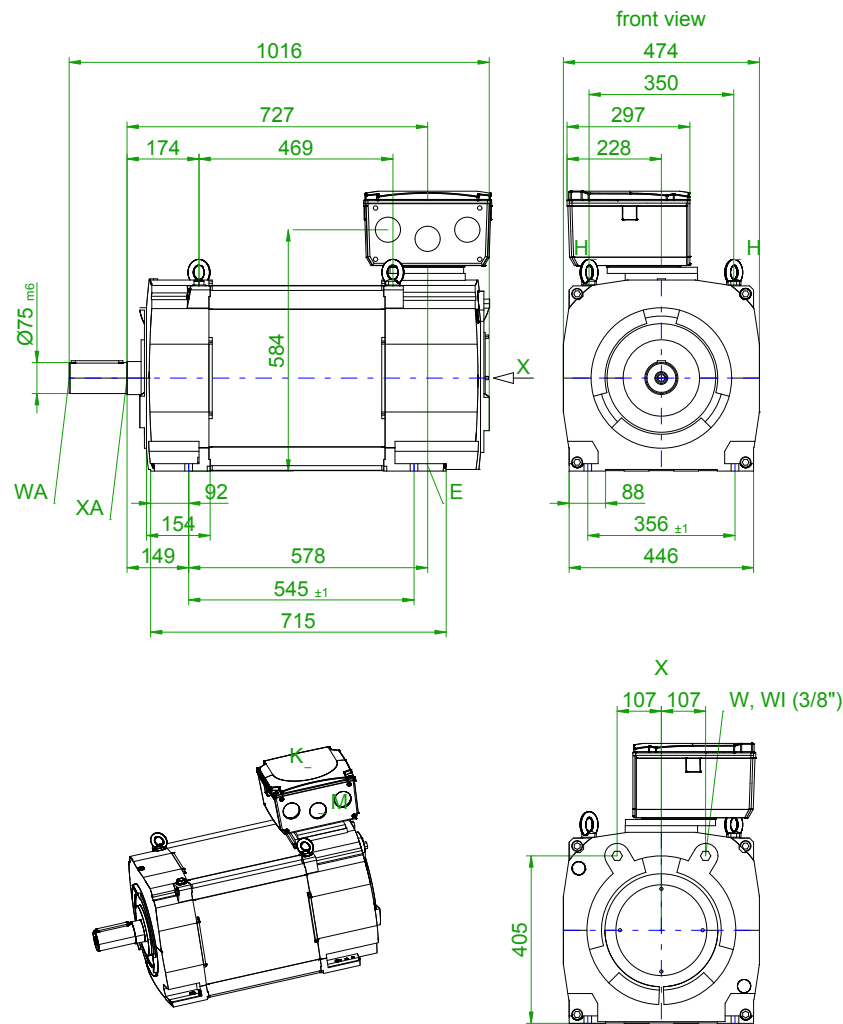


version with featherkey

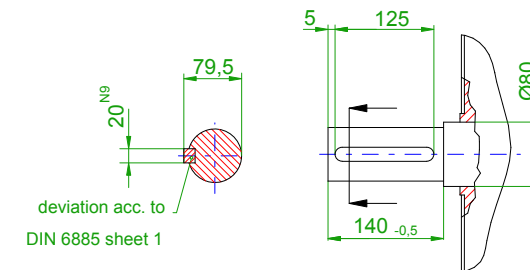

WA - Shaft extension 75m6 x 140-0,5 to DIN748, tapped centre hole DR M20 to DIN332
 XA - Relief groove E1.6x0.3 to DIN 509
 WI - Water inlet temperature 30°C
 W - Water flux 20 l/min
 K - Terminal box
 M - Cable entry 3x M75x1,5
 MA - M20x1,5 for temperature sensor

E - Ground clamp
 H - Lifting eye

Type of protection: IP 55
 Type of construction IM B3

		
Einheit / unit: mm	Asynchron-Servomotor Asynchronous Servo Motor:	1PH8226-1AF20-2BA2
nicht tolerierte Maße / not toleranced dimensions:	Optionen / options:	
Maßstab / scale: ohne / without	Gewicht / mass:	740 kg
CAD CREATOR 2.2 (WWW-Version V02.20.00.00)	Bemerkung / notice:	
	Druckdatum / print date:	09.05.2019