



accessories for circuit breaker 3WA, closing coil (CC-COM) / shunt release (ST-COM), 100% OP 24-30 V DC, communication-capable, Ready4COM, suitable for continuous duty

| Model | |
|---|---|
| product brand name | SENTRON |
| product designation | Closing coil/shunt trip |
| design of the fuse link | fuse gG: 2 A, miniature circuit breaker C characteristic: 2 A |
| closing active power [W] | 60 W |
| operating active power [W] | 8 W |
| minimum command time at Us = 100% | 60 ms |
| make time (electrical) of circuit breaker at Us = 100% | 80 ms |
| opening time (electrical) of circuit breaker at Us = 100% | 80 ms |
| ambient temperature during operation | |
| • minimum | -40 °C |
| • maximum | 70 °C |
| ambient temperature during storage | |
| • minimum | -40 °C |
| • maximum | 80 °C |

| Approvals Certificates | | |
|--------------------------|-----|-------------------|
| General Product Approval | EMV | Test Certificates |



[Miscellaneous](#)

| Test Certificates | Maritime application | other | Dangerous goods |
|-------------------|----------------------|-------|-----------------|
|-------------------|----------------------|-------|-----------------|

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



[Confirmation](#)

[Transport Information](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AD32>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AD32>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA9111-0AD32

CAX-Online-Generator

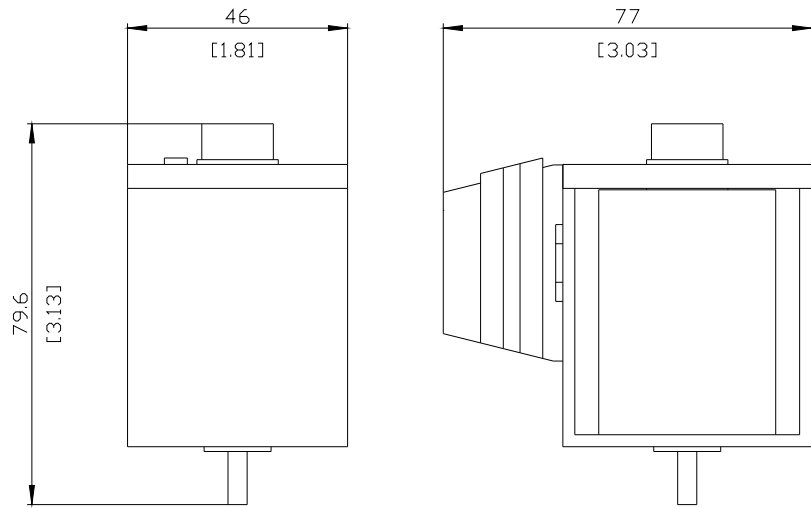

last modified:

4/13/2025 

