

Pushbutton, metal 2 position Operator only Momentary Extended, gray Non-Illuminated UL file E22655 in Vol. 6 (7) Sec. 13 (2)

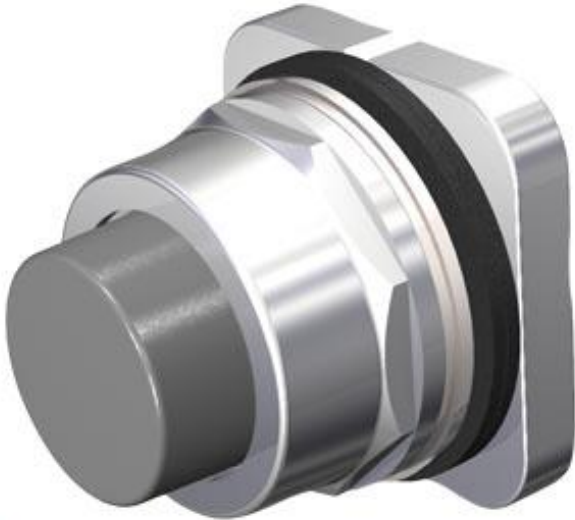


Figure similar

Design of the product	Actuator round
Enclosure	
Number of command points	1
Delivery state	No
• as a kit	
Actuator	
Design of the operating mechanism	Pushbutton
Color	
• of the actuating element	gray
Material of the actuating element	plastic
Shape of the actuating element	Raised pushbutton
Type of unlocking device	without
Number of switching positions	2
Front ring	
Product component front ring	Yes
Design of the front ring	standard
Material of the front ring	metal

Color of the front ring	chrome
-------------------------	--------

Holder

Material of the holder	Metal
------------------------	-------

General technical data

Product component	
• Light source	No
Degree of pollution	1
Protection class IP	IP66

Ambient conditions

Ambient temperature	
• during operation	-35 ... +70 °C
• during storage	-40 ... +85 °C

Installation/ mounting/ dimensions

Shape of the installation opening	round
-----------------------------------	-------

Certificates/ approvals

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=US2:52PA8B6>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=US2:52PA8B6>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/US2:52PA8B6>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:52PA8B6&lang=en

last modified:

12/04/2019