

AS-Interface module, 2 safe inputs, black, 4-pole connector with screw terminal and 4-pole connector with spring-type terminal, for front plate mounting



Product brand name	SIRIUS ACT
Product designation	AS-Interface module
Product type designation	3SU1
General technical data	
• (product function)	2F-DI
Degree of pollution	3
Type of voltage	
• of the operating voltage	DC
• of the input voltage	DC
Consumed current	
• maximum	60 mA
Protection class IP	IP20
Shock resistance	
• for railway applications acc. to DIN EN 61373	Category 1, Class B
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	A
Reference code acc. to DIN EN 81346-2	K
Reference code acc. to DIN EN 61346-2	K
Design of the slave type	2 F-DI

AS interface slave profile	S-0.B.F
((todo concept pref name))	1...F
Number of AS-i slaves	1
Protocol is supported ASIsafe (Safety at work) protocol	Yes
Operating voltage	
• rated value	26.5 ... 31.6 V
Operating voltage 1	
• at DC rated value	30 V

Communication/ Protocol

Protocol is supported	
• AS-interface protocol	Yes

Auxiliary circuit

Number of NO contacts for auxiliary contacts	0
---	---

Inputs/ Outputs

Number of digital inputs	
• safety-related	2

Connections/Terminals

Type of electrical connection	Screw connection + spring-type terminal
Type of connectable conductor cross-sections	
• solid without core end processing	1x (0.2 ... 2.5 mm ²)
• finely stranded with core end processing	1x (0.25 ... 2.5 mm ²)
• finely stranded without core end processing	1x (0.2 ... 2.5 mm ²)
• at AWG conductors	1x (30 ... 12)
Tightening torque	
• with screw-type terminals	0.5 ... 0.6 N·m

Product Function

Suitability for use	
• safety-related circuits	Yes

Safety related data

Safety Integrity Level (SIL) acc. to IEC 61508	3
SIL Claim Limit (subsystem) acc. to EN 62061	SILCL 3
Performance level (PL) acc. to EN ISO 13849-1	e
Safe failure fraction (SFF)	99 %
Average diagnostic coverage level (DCavg)	99 %
PFHD with high demand rate acc. to EN 62061	0.0000000045 1/h
PFDAvg with low demand rate acc. to IEC 61508	0.000005
Category acc. to EN 954-1	4

Ambient conditions

Ambient temperature	
----------------------------	--

- during operation
- during storage

-25 ... +70 °C

-40 ... +80 °C

Environmental category during operation acc. to IEC 60721

3M6, 3S2, 3B2, 3C3 (without salt spray), 3K6 (with relative humidity of 10 ... 95%, no condensation in operation permitted)

Installation/ mounting/ dimensions

- Mounting type of modules and accessories
- Mounting type of AS-i slaves

Front plate mounting

Front mounting

(height)

42 mm

Width

30 mm

Depth

65.5 mm

Certificates/approvals

General Product Approval

EMC

Functional Safety/Safety of Machinery

Declaration of Conformity



UL



RCM

[Type Examination Certificate](#)



EG-Konf.

[Miscellaneous](#)

Test Certificates

other

[Type Test Certificates/Test Report](#)



ASi

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1400-1EA10-2AA0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1400-1EA10-2AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1400-1EA10-2AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1400-1EA10-2AA0&lang=en

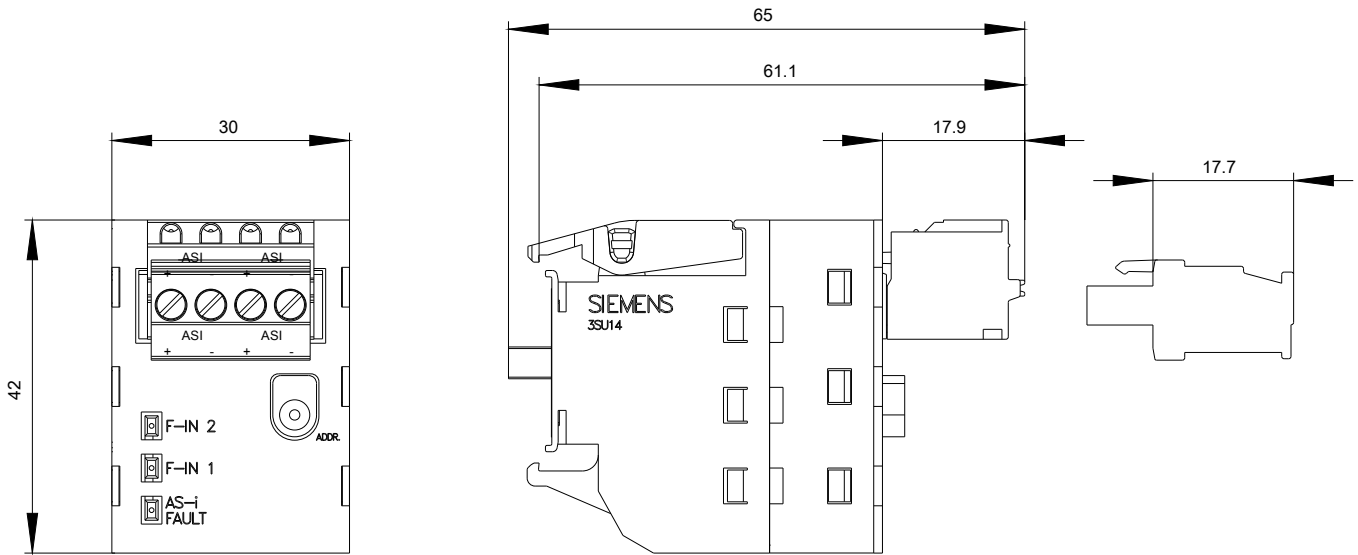

-K1

AS-i Bus:

Slave:

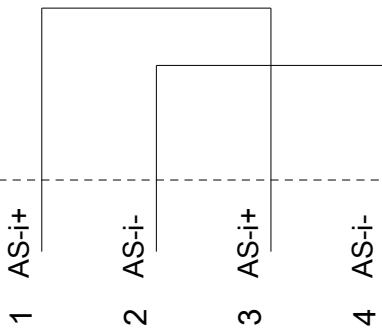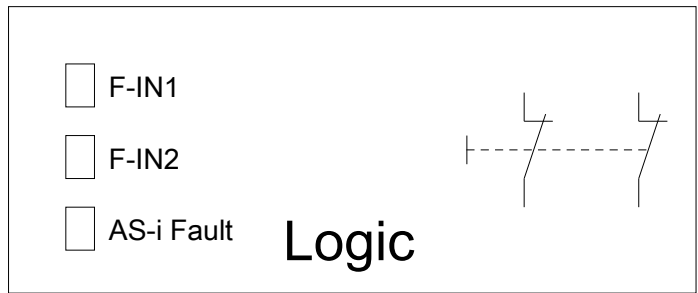

ADDR

last modified:

07/25/2019