



Figure similar

AS-INTERFACE SLIMLINE MOD. IP20 S22.5, DIGITAL, 2I/2OR(RELAY), 2 X 1 INPUT, 2-WIRE, PNP 2 X 1 OUTPUT, RELAY, 6A,UC 230V SCREW-TYPE TERMINAL CONNECT., MODULE WIDTH 22.5 MM

General technical data:		
Design of the product		SlimLine S22.5 - I/O modules for operation in the control cabinet, IP20
Design of the slave type		standard slave
Type		2 inputs / 2 outputs
I/O configuration		3
ID/ID2 code		0/F
Protocol is supported AS-interface protocol		Yes
AS interface total current input max	mA	50
operating voltage according to AS-Interface specification	V	26.5 ... 31.6
Addressing		front addressing socket
Type of electrical connection of the inputs and outputs		screw-type terminals
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		A
Equipment marking acc. to DIN EN 61346-2		K
Sensor supply:		
Type of voltage supply for power supply		using AS-Interface
Input voltage	V	20 ... 30
Property of the sensor supply Short-circuit and overload resistant		Yes
Inputs:		
Number of digital inputs		2
Type of connection		2-wire technology

Input circuit		PNP transistor
Type of voltage of the input voltages		DC
Inputs switching level High min	V	10
Input current at digital input		
• for signal <1> minimum	mA	5
• with signal <0> maximum	mA	1.5
Inputs sensor supply using AS-Interface		short-circuit and overload resistant

Outputs:

Number of digital outputs		2
Output voltage for DC at 24 V	V	22 ... 24
Outputs		
• current carrying capacity I _{th}	A	6
Ampacity		
• of the output relay		
— at DC-13		
— at 24 V	A	1
— at 110 V	A	0.2
— at 230 V	A	0.1
— at AC-15 at 230 V at 50/60 Hz	A	3
Type of switching output		relay, changeover floating
Property of the output Short-circuit proof		No
output Polarity reversal protection		does not apply
Outputs		
• short-circuit protection		external back-up fuse required
• induction protection		does not apply
• watchdog		built-in
Status display		
• display of I/Os		yellow LED
• AS-Interface		green LED
• FAULT		red LED
Assignment of data bits		
• D0		IN1
• D1		IN2
• D2		OUT1
• D3		OUT2

Ambient conditions:

Ambient temperature		
• during operation	°C	-25 ... +70
• during storage	°C	-40 ... +85
Protection class IP		IP20

Mechanical data:

Width	mm	22.5
Height	mm	102
Depth	mm	86
Mounting type		35 mm standard rail mounting or wall mounting using push-in lugs
Conductor cross-section		<ul style="list-style-type: none"> • solid • finely stranded <ul style="list-style-type: none"> — with end sleeve • AWG solid or stranded

Certificates/ approvals:

AS-Interface certificate		yes (or requested for in case of new units)
Approvals		UL, CSA, shipbuilding (or requested for in case of new units)

General Product Approval	Shipping Approval
---------------------------------	--------------------------



Shipping Approval	other
--------------------------	--------------



[Declaration of Conformity](#)

[Confirmation](#)

other

[Environmental Confirmations](#) [other](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK14020BE000AA2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK14020BE000AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK14020BE000AA2&lang=en

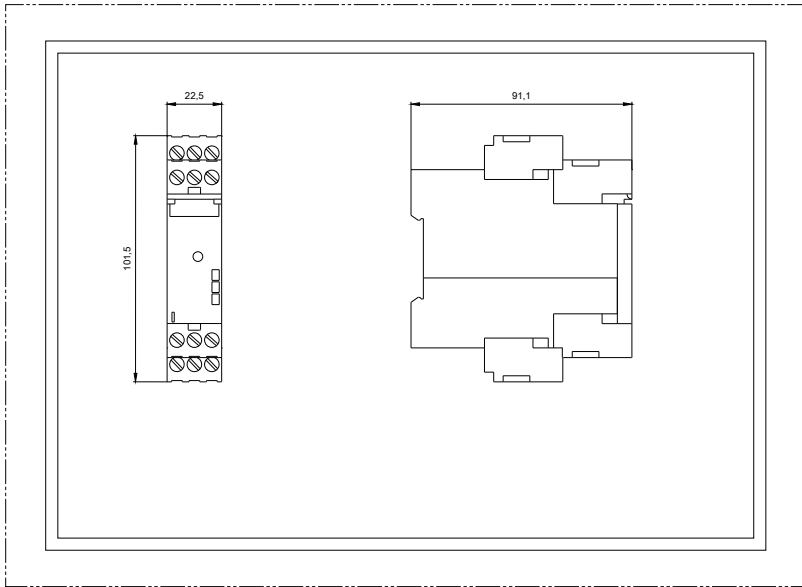

last modified:

05.05.2015