



SENTRON, Fuse switch disconnecter 3NP5, 3-pole, NH1, 250 A, for assembly and installation on mounting plate, with High-speed closing, screw terminal, Fuse monitoring: electronic, Auxiliary switch at Switch disconnecter: 1 NO+1 NC, Auxiliary switch at the Fuse monitoring: 2 NO+1 NC

| Model | |
|---|---|
| product brand name | SENTRON |
| product designation | 3NP5 fuse switch disconnecter |
| design of the product | auxiliary switch at the switch disconnecter: 1 NO + 1 NC, auxiliary switch at the fuse monitoring device: 2NO+1NC |
| design of the safety monitoring | Electronic |
| design of the actuating element | Cover handle |
| design of the load switch strip form | No |
| General technical data | |
| number of poles | 3 |
| size of disconnecting link | NH0, NH1 |
| size of fuse link | NH0, NH1 |
| mounting type | Fixed mounting |
| fuse system | LV HRC fuse |
| Voltage | |
| insulation voltage rated value | 690 V |
| surge voltage resistance rated value | 6 kV |
| operating voltage | |
| • at AC rated value maximum | 690 V |
| • at DC rated value | 440 V |
| Protection class | |
| protection class IP on the front | IP00 |
| Dissipation | |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 2.66 W |
| Main circuit | |
| operational current rated value | 250 A |
| Suitability | |
| suitability for use | |
| • main switch | No |
| • switch disconnecter | Yes |
| • EMERGENCY OFF switch | No |
| • safety switch | Yes |
| Product function | |
| product function fuse monitoring | Yes |
| Short circuit | |
| maximum short-circuit current breaking capacity (I _{cu}) at 400 V rated value | 2.5 kA |
| Connections | |
| type of electrical connection | 6 - 150 mm ² |
| • for main current circuit | screw-type terminals |

| Mechanical Design | |
|-------------------------------|----------------|
| height | 300 mm |
| width | 207 mm |
| depth | 200.5 mm |
| number of modular width units | 1 |
| fastening method | Mounting plate |
| fastening method | |
| • floor mounting | Yes |
| • rail mounting | No |
| net weight | 5 930 g |

| Environmental conditions | |
|---|---------|
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature during operation | |
| • minimum | -25 °C |
| • maximum | 55 °C |
| ambient temperature during storage | |
| • minimum | -50 °C |
| • maximum | 80 °C |

Approvals Certificates

| | |
|--------------------------|-------|
| General Product Approval | other |
|--------------------------|-------|



[Confirmation](#)

[Miscellaneous](#)



[Miscellaneous](#)

| | |
|-------|-------------|
| other | Environment |
|-------|-------------|

[Confirmation](#)

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NP5260-0HA13>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NP5260-0HA13>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NP5260-0HA13

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

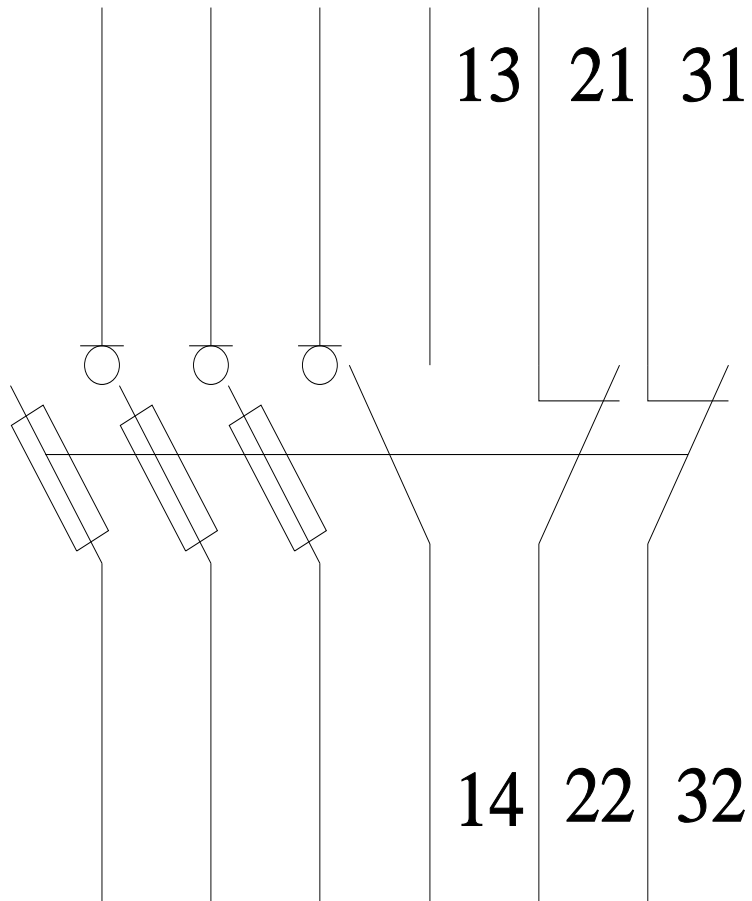

last modified:

12/16/2020 

