

Reversing contactor assembly AC-3, 7.5 kW/400 V, 125 V DC 3-pole, Size S0 Screw terminal Electrical and mechanical interlock 2 NO integrated



|                                      |  |
|--------------------------------------|--|
| <b>Product brand name</b>            | SIRIUS   |
| <b>Product designation</b>           | Reversing contactor assembly   |
| <b>Product type designation</b>      | 3RA23  |
| <b>Manufacturer's article number</b> | <ul style="list-style-type: none"> <li>• 1 of the supplied contactor <a href="#">3RT2025-1BG40</a></li> <li>• 2 of the supplied contactor <a href="#">3RT2025-1BG40</a></li> <li>• of the supplied RH assembly kit <a href="#">3RA2923-2AA1</a></li> </ul> |

| General technical data   |                              |
|--|------------------------------|
| <b>Size of contactor</b>   | S0                           |
| <b>Product extension</b>   | Yes                          |
| <ul style="list-style-type: none"> <li>• Auxiliary switch</li> </ul>                             |                              |
| <b>Insulation voltage</b>  | 690 V                        |
| <ul style="list-style-type: none"> <li>• with degree of pollution 3 at AC rated value</li> </ul> |                              |
| <b>Degree of pollution</b>   | 3                            |
| <b>Surge voltage resistance rated value</b>  | 6 kV                         |
| <b>Protection class IP</b>   | IP20                         |
| <ul style="list-style-type: none"> <li>• on the front</li> </ul>                                 |                              |
| <b>Shock resistance</b>  | 9.8g / 5 ms and 5.9g / 10 ms |
| <b>Shock resistance at rectangular impulse</b>   |                              |

|  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• at AC</li> <li>• at DC</li> </ul>   | 7,5g / 5 ms, 4,7g / 10 ms<br>10g / 5 ms, 7,5g / 10 ms |
| <b>Shock resistance with sine pulse</b> <ul style="list-style-type: none"> <li>• at AC</li> <li>• at DC</li> </ul>   | 11,8g / 5 ms, 7,4g / 10 ms<br>15g / 5 ms, 10g / 10 ms |
| <b>Mechanical service life (switching cycles)</b> <ul style="list-style-type: none"> <li>• of contactor typical</li> <li>• of the contactor with added auxiliary switch block typical</li> </ul> | 10 000 000<br>10 000 000                              |
| <b>Reference code acc. to DIN EN 81346-2</b>   | Q   |

### Ambient conditions

|   |                                  |
|---|----------------------------------|
| <b>Installation altitude at height above sea level</b> <ul style="list-style-type: none"> <li>• maximum</li> </ul>        | 2 000 m                          |
| <b>Ambient temperature</b> <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> </ul> | -25 ... +60 °C<br>-55 ... +80 °C |

### Main circuit

|   |   |
|---|---|
| <b>Number of poles for main current circuit</b>   | 3   |
| <b>Number of NO contacts for main contacts</b>  | 3   |
| <b>Number of NC contacts for main contacts</b>  | 0   |
| <b>Operating voltage</b> <ul style="list-style-type: none"> <li>• at AC-3 rated value maximum</li> </ul>  | 690 V   |
| <b>Operating current</b> <ul style="list-style-type: none"> <li>• at AC-1 at 400 V               <ul style="list-style-type: none"> <li>— at ambient temperature 40 °C rated value</li> <li>— at ambient temperature 60 °C rated value</li> </ul> </li> <li>• at AC-2 at 400 V rated value</li> <li>• at AC-3               <ul style="list-style-type: none"> <li>— at 400 V rated value</li> </ul> </li> </ul>  | 40 A<br>35 A<br>17 A<br>17 A                  |
| <b>Operating current</b> <ul style="list-style-type: none"> <li>• at 1 current path at DC-1               <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> </ul> </li> <li>• with 2 current paths in series at DC-1               <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> </ul> </li> <li>• with 3 current paths in series at DC-1               <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> </ul> </li> </ul> | 35 A<br>4.5 A<br>35 A<br>35 A<br>35 A<br>35 A |
| <b>Operating current</b> <ul style="list-style-type: none"> <li>• at 1 current path at DC-3 at DC-5</li> </ul>  |   |

|  |           |
|--|-----------|
| — at 24 V rated value                            | 20 A      |
| — at 110 V rated value                           | 2.5 A     |
| • with 2 current paths in series at DC-3 at DC-5 |           |
| — at 24 V rated value                            | 35 A      |
| — at 110 V rated value                           | 15 A      |
| • with 3 current paths in series at DC-3 at DC-5 |           |
| — at 24 V rated value                            | 35 A      |
| — at 110 V rated value                           | 35 A      |
| <b>Operating power</b>                           |           |
| • at AC-2 at 400 V rated value                   | 7.5 kW    |
| • at AC-3  |           |
| — at 400 V rated value                           | 7.5 kW    |
| — at 500 V rated value                           | 10 kW     |
| — at 690 V rated value                           | 11 kW     |
| • at AC-4 at 400 V rated value                   | 7.5 kW    |
| <b>No-load switching frequency</b>               | 1 500 1/h |
| <b>Operating frequency</b>                       |           |
| • at AC-1 maximum                                | 1 000 1/h |
| • at AC-2 maximum                                | 1 000 1/h |
| • at AC-3 maximum                                | 1 000 1/h |
| • at AC-4 maximum                                | 300 1/h   |

| Control circuit/ Control                             |       |
|--|-------|
| <b>Type of voltage of the control supply voltage</b> | DC    |
| <b>Control supply voltage 1</b>                      |       |
| • at DC rated value                                  | 125 V |
| <b>Closing power of magnet coil at DC</b>            | 5.9 W |
| <b>Holding power of magnet coil at DC</b>            | 5.9 W |

| Auxiliary circuit   |       |
|---|-------|
| <b>Number of NO contacts for auxiliary contacts</b>             |       |
| • per direction of rotation                                     | 1     |
| • instantaneous contact   | 2     |
| <b>Operating current of auxiliary contacts at AC-12 maximum</b> | 10 A  |
| <b>Operating current of auxiliary contacts at AC-15</b>         |       |
| • at 230 V  | 6 A   |
| • at 400 V  | 3 A   |
| <b>Operating current of auxiliary contacts at DC-13</b>         |       |
| • at 24 V   | 10 A  |
| • at 60 V   | 2 A   |
| • at 110 V  | 1 A   |
| • at 220 V  | 0.3 A |

|  |  |
|--|--|
| <b>Contact reliability of auxiliary contacts</b> | < 1 error per 100 million operating cycles |
|--|--|

### UL/CSA ratings

|   |   |
|---|---|
| <b>Full-load current (FLA) for three-phase AC motor</b>   |   |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>  | <p>14 A</p> <p>17 A</p>                                       |
| <b>Yielded mechanical performance [hp]</b>  |   |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for three-phase AC motor <ul style="list-style-type: none"> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul> | <p>1 hp</p> <p>3 hp</p> <p>5 hp</p> <p>10 hp</p> <p>15 hp</p> |
| <b>Contact rating of auxiliary contacts according to UL</b>   | A600 / Q600   |

### Short-circuit protection

|   |  |
|---|--|
| <b>Design of the fuse link</b>  |  |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of assignment 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul> | <p>gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 63 A</p> <p>gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A</p> <p>fuse gG: 10 A</p> |

### Installation/ mounting/ dimensions

|   |  |
|---|--|
| <b>Mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>Mounting type</b>  | screw and snap-on mounting onto 35 mm standard mounting rail   |
| <b>Height</b>   | 101 mm   |
| <b>Width</b>  | 90 mm  |
| <b>Depth</b>  | 107 mm   |
| <b>Required spacing</b>   |  |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul> | <p>6 mm</p> <p>0 mm</p> <p>6 mm</p> <p>6 mm</p> <p>6 mm</p> <p>6 mm</p> <p>6 mm</p> <p>0 mm</p> <p>6 mm</p> <p>6 mm</p>              |

|                  |      |
|------------------|------|
| — downwards      | 6 mm |
| • for live parts |      |
| — forwards       | 6 mm |
| — Backwards      | 0 mm |
| — upwards        | 6 mm |
| — downwards      | 6 mm |
| — at the side    | 6 mm |

## Connections/ Terminals

|   |   |
|---|---|
| <b>Type of electrical connection</b>                |   |
| • for main current circuit                          | screw-type terminals  |
| • for auxiliary and control current circuit         | screw-type terminals  |
| <b>Type of connectable conductor cross-sections</b> |   |
| • for main contacts                                 |   |
| — solid   | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )                       |
| — single or multi-stranded                          | 2x (1 ... 2,5 mm <sup>2</sup> ), 2x (2,5 ... 10 mm <sup>2</sup> )                       |
| — finely stranded with core end processing          | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> |
| • at AWG conductors for main contacts               | 2x (16 ... 12), 2x (14 ... 8)   |
| <b>Type of connectable conductor cross-sections</b> |   |
| • for auxiliary contacts                            |   |
| — single or multi-stranded                          | 2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> )                   |
| — finely stranded with core end processing          | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )                   |
| • at AWG conductors for auxiliary contacts          | 2x (20 ... 16), 2x (18 ... 14)  |

## Safety related data

|   |           |
|---|-----------|
| <b>B10 value</b>  |           |
| • with high demand rate acc. to SN 31920                                  | 1 000 000 |
| <b>Proportion of dangerous failures</b>                                   |           |
| • with low demand rate acc. to SN 31920                                   | 40 %      |
| • with high demand rate acc. to SN 31920                                  | 75 %      |
| <b>Failure rate [FIT]</b>   |           |
| • with low demand rate acc. to SN 31920                                   | 100 FIT   |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b> | 20 y      |

## Communication/ Protocol

|   |    |
|---|----|
| <b>Product function Bus communication</b>               | No |
| <b>Protocol is supported</b>                            |    |
| • AS-Interface protocol                                 | No |
| Product function Control circuit interface with IO link | No |

## Certificates/ approvals

|                          |                           |                   |
|--------------------------|---------------------------|-------------------|
| General Product Approval | Declaration of Conformity | Test Certificates |
|--------------------------|---------------------------|-------------------|



[Miscellaneous](#)

[Special Test Certificate](#)

### Marine / Shipping



|                   |       |         |
|-------------------|-------|---------|
| Marine / Shipping | other | Railway |
|-------------------|-------|---------|



[Confirmation](#)

[Vibration and Shock](#)

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

[www.siemens.com/ic10](http://www.siemens.com/ic10)

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2325-8XB30-1BG4>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2325-8XB30-1BG4>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2325-8XB30-1BG4>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RA2325-8XB30-1BG4&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2325-8XB30-1BG4&lang=en)


**Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current**


<https://support.industry.siemens.com/cs/ww/en/ps/3RA2325-8XB30-1BG4/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2325-8XB30-1BG4&objecttype=14&gridview=view1>

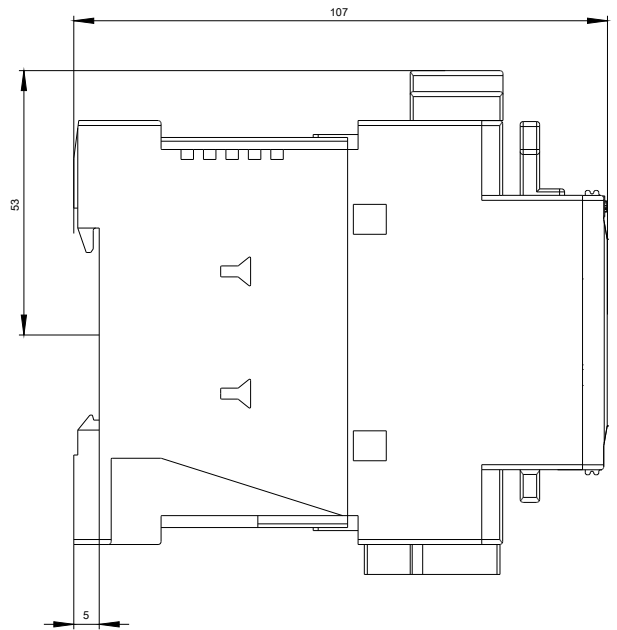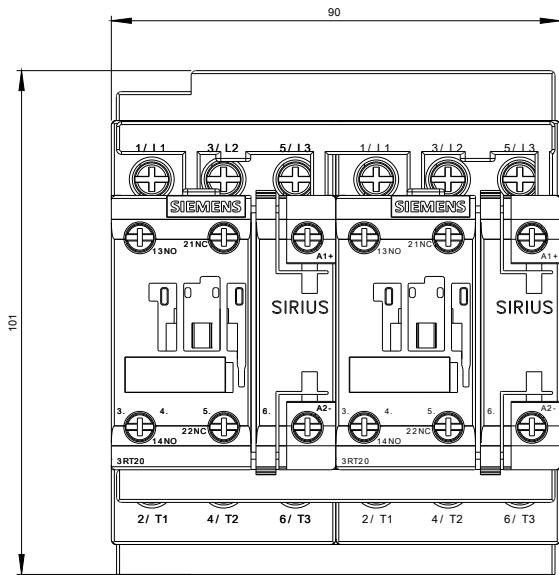

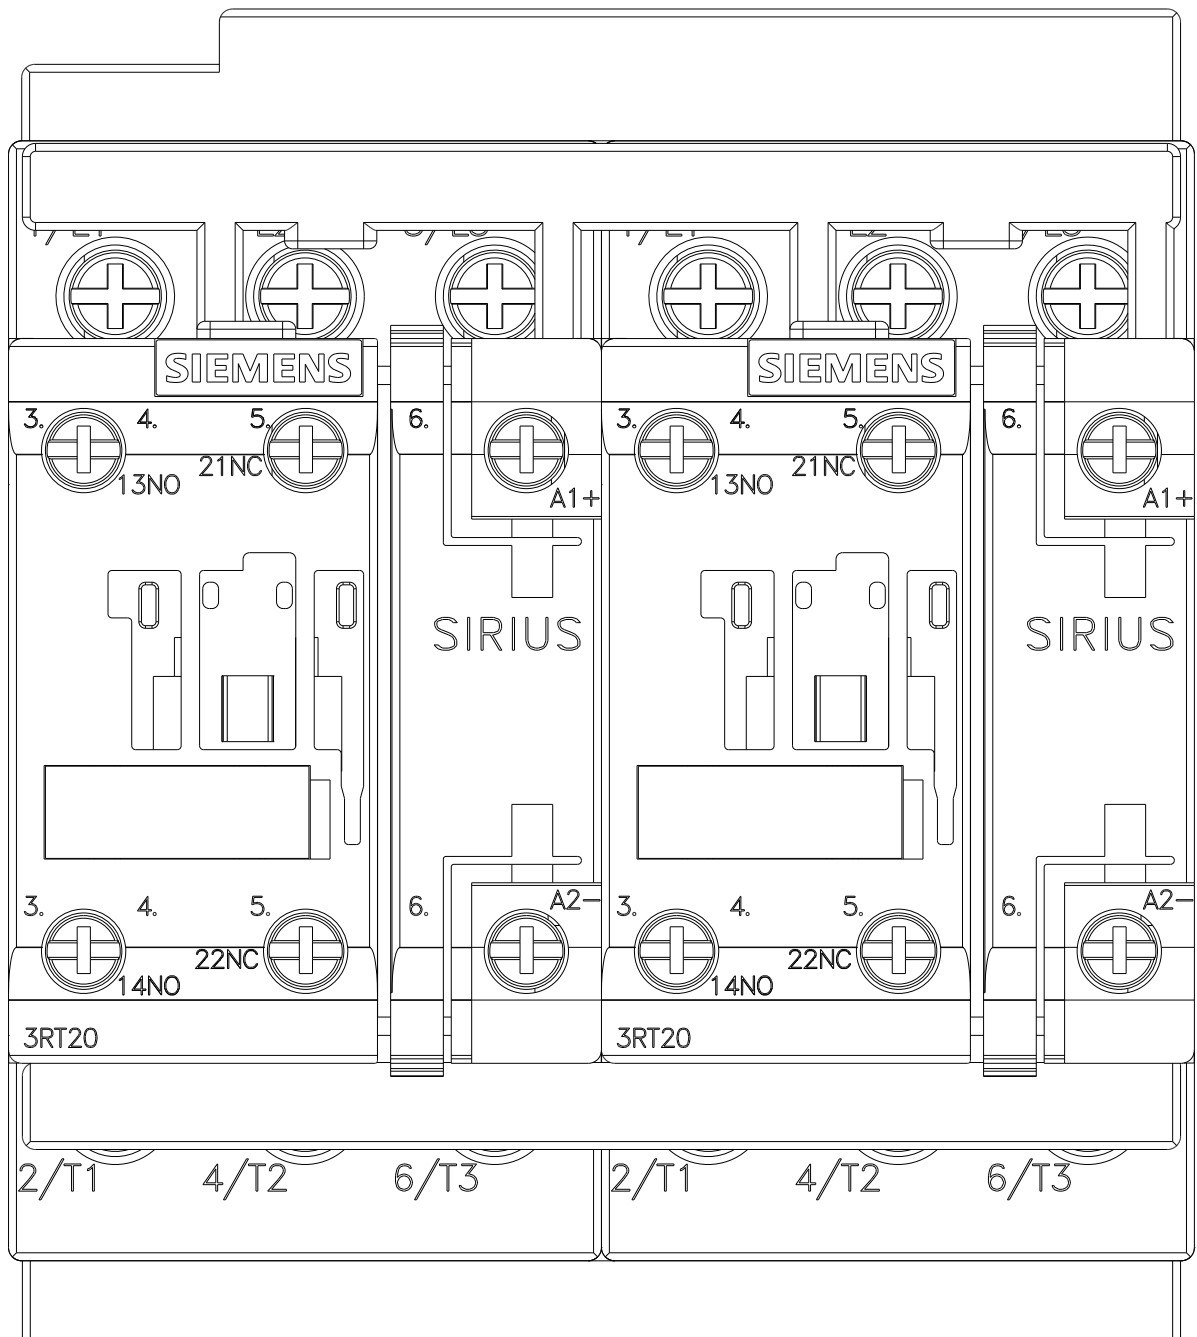

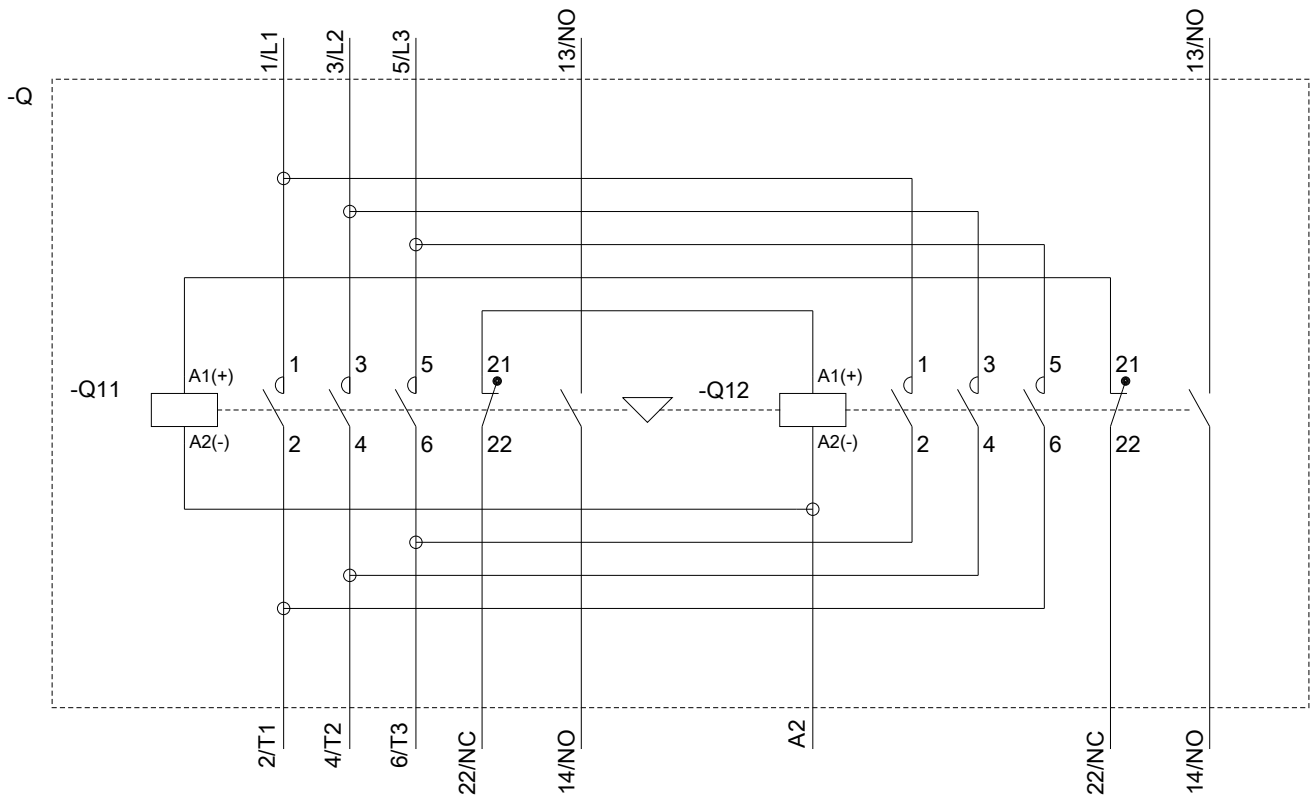

last modified:

02/06/2020