

TALON

Meter Mounting Equipment



Selection and application guide

Meter Mounting Equipment

For use in Ohio



www.talonmetering.com

Meter Mounting Equipment

Table of Contents

Service	Rating	Positions	Terminals	Page
Air Conditioning Disconnects	-	-	-	2
Ringless, 4 Jaw for 1 phase, 3 wire 600V AC	135A	1	4	3
Ringless, 4 Jaw for 1 phase, 3 wire 600V AC	200A	1	4	4
Ringless, Side Wired, 4 Jaw for 1 phase, 3 wire 600V AC	200A	1	4	5
Ringless, Horizontal Gang, 4 Jaw for 1 phase, 3 wire	100/150A	2-4	4	6-7
Ringless, Horizontal Gang, 4 Jaw for 1 phase, 3 wire 600V AC	200A	2-6	4	8-9
Ringless, 4, 5, & 7 Jaw, Lever Bypass	125/200A	1	4, 5 & 7	10-11
Ringless, 4 & 5 Jaw, Lever Bypass	320A	1	4 & 5	12-13
Ringless, 4, 5, & 7 Jaw, Lever Bypass	320A	1	4, 5 & 7	14-15
Ringless, Horizontal, 5 & 7 Jaw, Lever Bypass	200A	1	5 & 7	16-17
Ringless, 5 Jaw, Horn Bypass	100/200A	1	4 & 5	18-19
Ringless, 4 & 5 Jaw Meter Main	100/320A	1	4 & 5	20-21
Ringless Horizontal, 4 Jaw, Horn Bypass	200A	2-6	4	22
Spa Panels	-	-	-	23
Condominium Meter Paks, 120/240V AC, 1 Phase, 3 Wire, Ring Type	125/200A	2-6	4	24
Condominium Meter Paks, 120/240V AC, 1 Phase, 3 Wire, Ringless, 5 Jaw	125/200A	2-6	5	25
Condominium Meter Paks, 120/240V AC, 1 Phase, 3 Wire, Ringless, 5 Jaw, Horn Bypass	125/200A	2-6	5 & 7	26
Condominium Meter Paks, 120/240V AC, 1 Phase, 3 Wire, Ringless, 5th or 7th Jaw, Lever Bypass	125/200A	2-6	5 & 7	27
TL Series Temporary Power Outlet Panels	-	-	-	28-31
Circuit Breakers	-	-	-	32
Connector Lugs	-	-	-	33-34
Accessories	-	-	-	35
Watt-hour Meter Forms	-	-	-	36
Energization of Electrical Equipment	-	-	-	37
Materials & Finishes	-	-	-	38
Terms of Sale, Meter Mounting Device Applications	-	-	-	39
Utility Approval Reference	-	-	-	40-55

Represented by:

Impact Agency
 3501 Croton Avenue
 Cleveland, Ohio 44115
 Phone: (216) 361-0676



Air Conditioning Disconnects

Fused and Non-fused

Features:

Flexibility

- 30-60 amperes
- 240 volts A.C.
- Padlock provisions
- Horsepower rated
- 10,000 A.I.C.
- New models available with internal GFCI receptacle
- Removable door
- Ample wiring space

Rugged Durability

- Noryl® thermoplastic and powder coated G90 steel enclosures are corrosion resistant and extremely durable giving long maintenance free service
- Copper conductors
- Raised mounting embosses

Steel AC Disconnects

Ampere rating	Disconnect type	Catalog Number	Horse power rating	Dimensions (inches)		
				H	W	D
30	Fused pullout	LF2030	3	7.3	5.0	2.1
60	Fused pullout	LF2060	10	8.0	5.0	2.1
60	Non-fused pullout	LN2060	10	7.3	5.0	2.1
60	Non-automatic switch	LNAS2060	10	7.3	5.0	2.1



Plastic AC Disconnects

Ampere rating	Disconnect type	Catalog Number	Horse power rating	Dimensions (inches)		
				H	W	D
30	Fused pullout	LF2030PL	3	8.0	5.3	3.1
60	Fused pullout	LF2060PL	10	8.0	5.3	3.1
60	Non-fused pullout	LN2060PL	10	7.3	5.0	2.1
60	Non-fused pullout	LN2060PLX	10	8.0	6.0	5.8



Steel AC Disconnects with 15 Amp GFCI Receptacle

Ampere rating	Disconnect type	Catalog Number	Horse power rating	Dimensions (inches)		
				H	W	D
30	Fused pullout	LF2030GFCI	3	9.0	6.1	5.1
60	Fused pullout	LF2060GFCI	10	9.0	6.1	5.1
60	Non-fused pullout	LN2060GFCI	10	7.1	5.8	5.1
60	Non-automatic switch	LNAS2060GFCI	10	7.1	5.8	5.1



Wire Range Table

Connector	Copper		Aluminum	
	Solid	Stranded	Solid	Stranded
Line	#14-8	#14-3	#12-8	#12-3
Load	#14-8	#14-3	#12-8	#12-3
Neutral	#12-8	#12-2	#12-8	#12-2
Equip. grnd.	#12-8	#12-2	#12-8	#12-2



135A Meter Mounting Equipment

Ringless, 4 Jaw for 1 phase, 3 wire 600V AC

Service	Catalog Number	No. of Terminals	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
					W	H	D		
O/U	UAT111-OPGP ^①	4	#14-2/0	Horn	8.0	11.7	3.7	RX Opening	U7487-RL-TG-KK-BLG
O/U	UAT111-OPQG ^②	4	#14-2/0	Horn	8.0	11.7	3.7	RX Opening	U7487-RL-QG-KK U7487-RL-TG-KK
OH	UAT111-BPGP ^③	4	#14-2/0	Horn	8.0	11.7	3.7	1.25" Hub Installed	N/A
O/U	UAT111-BPQG ^②	4	#14-2/0	Horn	8.0	11.7	3.7	1.25" Hub Installed	U7487-YL-TG-KK U8750-YL-KK
O/U	UAT131-OPGP	4	#6-350kcmil	Horn	8.0	11.7	3.7	RX Opening	UAP8545-RL-TG
O/U	UAT131-BPGP	4	#6-350kcmil	Horn	8.0	11.7	3.7	1.25" Hub Installed	N/A
O/U	UAT111-OGF	4	#14-2/0	None	8.0	11.7	3.7	RX Opening	N/A
O/U	UAT111-XGF	4	#14-2/0	None	8.0	11.7	3.7	RX Cl. Plate	U7021-DL-TG
O/U	UAT111-XMF	5	#14-2/0	None	8.0	11.7	3.7	RX Cl. Plate	N/A
O/U	UAT131-XMF	4	#6-350kcmil	None	8.0	11.7	3.7	RX Cl. Plate	N/A

All units are UL listed.

Hubs: Please see accessories on page 35.

5th Terminal: Order catalog number H659-0121 for 9 o'clock position.

Connectors: Aluminum connectors, tin plated.

Ground: Units supplied with a quad ground.


① 7/8" barrel lock KO with bracket installed.

② Sockets with "QG" suffix have 2 ground lugs.

③ Aluminum Enclosure.



UAT111-OPGP

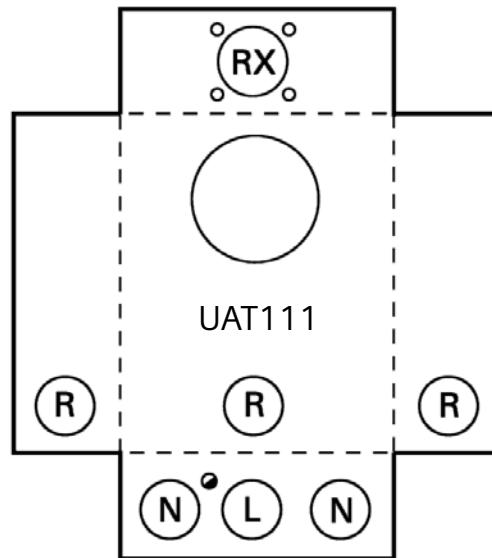

Knockouts (inches):	
●:	1/4
L:	1/2, 3/4, 1, 1-1/4, 1-1/2
N:	3/4, 1, 1-1/4, 1-1/2, 2
R:	1, 1-1/4, 1-1/2, 2
RX:	Ø2.750 HUB OP

200A Meter Mounting Equipment

Ringless, 4 Jaw for 1 phase, 3 wire 600V AC

Service	Catalog Number	No. of Terminals	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
					W	H	D		
OH	UAT317-OPGP ^①	4	#6-350 kcmil	Horn	8.0	15.0	4.5	RX Opening	U7021-RL-TG-KK-BLG
OH	UAT317-OPQG ^②	4	#6-350 kcmil	Horn	8.0	15.0	4.5	RX Opening	U7021-RL-QG-KK U7021-RL-TG-KK
OH	UAT317-DPGP ^①	4	#5-350 kcmil	Horn	8.0	15.0	4.5	2" Hub Installed	U7021-DL-TG-KK-BLG
OH	UAT317-DPQG ^②	4	#6-350 kcmil	Horn	8.0	14.0	4.5	2" Hub Installed	U7021-DL-TG-KK
O/U	UAT417-XG	4	#6-350 kcmil	None	11.0	15.0	4.5	Cover Plate	U1527-XL U7040-XL-TG
O/U	UAT417-OPQG ^②	4	#6-350 kcmil	Horn	11.0	15.0	4.5	RX Opening	U7040-RL-TG-KK
OH	UAT417-PPQG ^②	4	#6-350 kcmil	Horn	11.0	15.0	4.5	Blank Top	U7040-O-TG-KK
O/U	UAT417-XPQG ^②	4	#6-350 kcmil	Horn	11.0	15.0	4.5	Rx Cl. Plate	U7040-XL-TG-KK
O/U	UAT61A-XPPB	4	#6-350 kcmil	Horn	11.0	22.0	4.5	Rx Cl. Plate	N/A
OH	UAT337-OPGP ^{①③}	4	#6-350kcmil	Horn	8.0	14.0	4.5	RX Opening	UAP7021
OH	UAT317-0GF	4	#6-350kcmil	None	8.0	15.0	4.5	RX Opening	N/A
OH	UAT337-0GF ^②	4	#6-350kcmil	None	8.0	15.0	4.5	RX Opening	N/A
UG	UAT417-PGF	4	#6-350kcmil	None	11.0	15.0	4.5	Blank Top	U7040
O/U	UAT417-XGF	4	#6-350kcmil	None	11.0	15.0	4.5	RX Cl. Plate	U7040-XL-TG
UG	UAT437-PGF ^②	4	#6-350kcmil	None	11.0	15.0	4.5	Blank Top	UAP7040
O/U	UAT437-XGF ^②	4	#6-350kcmil	None	11.0	15.0	4.5	RX Cl. Plate	UAP7040-XL-TG-HSP

All units are UL listed.

Hubs: Please see accessories on page 35.

5th Terminal: Order catalog number H659-0121 for 9 o'clock position.

Connectors: Aluminum connectors, tin plated.

Ground: Units supplied with a quad ground.

① 7/8" barrel lock KO with bracket installed.

② Sockets with "QG" suffix have 2 ground lugs.

③ Aluminum enclosure.






UAT317-OPGP



UAT417-XPQG



UAT61A-XPPB

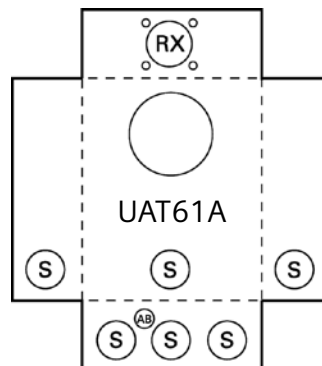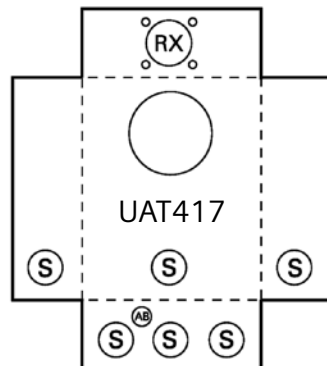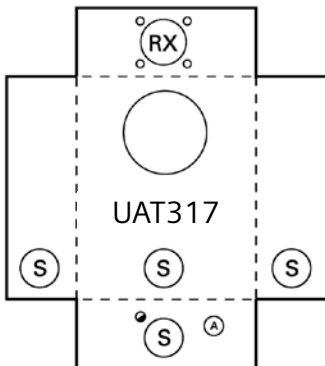

Knockouts (inches):	
●:	1/4
A:	1/2
S:	1, 1-1/4, 1-1/2, 2, 2-1/2
AB:	1/4, 1/2, 7/8
RX:	Ø2.750 HUB OP

200A Meter Mounting Equipment

Ringless, Side Wired, 4 Jaw for 1 phase, 3 wire 600V AC

Service [®]	Catalog Number	No. of Terminals	Connectors	Bypass	Dimensions			Meter Opening	Enclosure	Milbank Equivalent
					W	H	D			
UG	UAS817-PPGP [®]	4	#6-350 kcmil	Horn	13.0	14.0	5.1	Left	Steel	U4413-O-KK-BLG
UG	UAS817-PPZA [®]	4	#6-350 kcmil	Horn	13.0	14.0	5.1	Left	Steel	U4413-O-KK-BL
UG	UAS837-XPG [®]	4	#6-350 kcmil	Horn	13.0	14.0	5.1	Right	Aluminum	UAP1980-XL-KK-AEP
UG	UAS877-PPGP [®]	4	#6-350 kcmil	Horn	13.0	14.0	5.1	Right	Steel	U1980-O-KK-BLG
UG	UAS877-PPZA [®]	4	#6-350 kcmil	Horn	13.0	14.0	5.1	Right	Steel	U1980-O-KK-BL U1080-O-KK-AEP U1980-O-KK-BL
UG	UAS877-PGF	4	#6-350 kcmil	None	13.0	14.0	5.1	Right	Steel	U1980-O
O/U	UAT777-XGF	4	#6-350 kcmil	None	13	15	5	Right	Steel	N/A

All units are UL listed.

Hubs: Please see accessories on page 35.

5th Terminal: Order catalog number H659-0121 for 9 o'clock position.

Connectors: Aluminum connectors, tin plated.

Ground: units supplied with a ground.

① 7/8" barrel lock KO with bracket installed.

② 7/16" barrel lock KO with bracket installed.



③ Aluminum enclosure.



UAS877-PPZA



UAS837-XPG

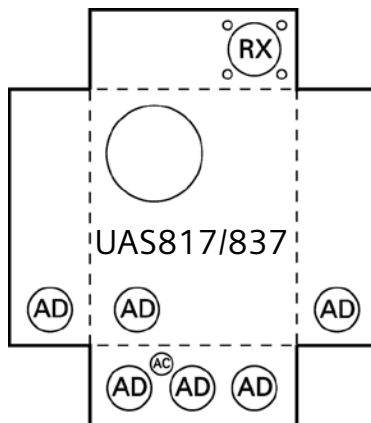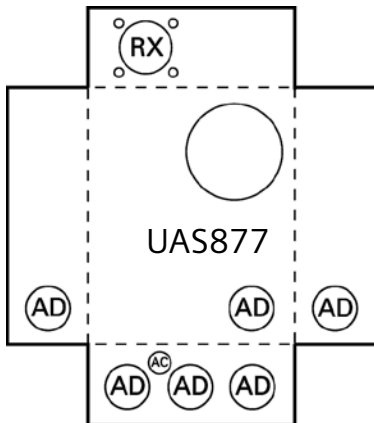

Knockouts (inches):	
S:	1, 1-1/4, 1-1/2, 2, 2-1/2
AB:	1/4, 1/2, 7/8
AC:	1/4, 1/2
AD:	1-1/4, 1-1/2, 2, 2-1/2, 3
RX:	Ø2.750 HUB OP

100/150A Position Meter Mounting Equipment

Ringless, Horizontal Gang, 4 Jaw for 1 phase, 3 wire

No. of Pos	Catalog Number	No. of Terminals	Enclosure Material	Connectors		Bypass	Dimensions (in.)			Service	Overall Amperage	Hub Provisions	Milbank Equivalent
				Line	Load		W	H	D				
100 Amp / Position Ringless Horizontal Multi-Position													
2	UA2311-OG ^①	4	Steel	#6-350 kcmil	#14-2/0	None	24.0	12.0	4.5	O/U	100	RX Opening	U8032-RL-TG
2	UA2311-OPGP ^②	4	Steel	#6-350 kcmil	#14-2/0	Horn	24.0	12.0	4.5	O/U	100	RX Opening	U8032-RL-TG-KK
2	UA2311-OPQG ^③	4	Steel	#6-350 kcmil	#14-2/0	Horn	24.0	12.0	4.5	O/U	100	RX Opening	U8032-XL-KK
3	UA3311-OPGP ^②	4	Steel	#6-350 kcmil	#14-2/0	Horn	32.0	12.0	4.5	O/U	100	RX Opening	U8033-RL-TG-KK-BLG
3	UA3311-OPQG ^③	4	Steel	#6-350 kcmil	#14-2/0	Horn	32.0	12.0	4.5	O/U	100	RX Opening	U8033-XL-KK
4	UA4311-OPGP ^②	4	Steel	#6-350 kcmil	#14-2/0	Horn	40.0	12.0	4.5	O/U	100	RX Opening	U8034-RL-TG-KK-BLG U8034-XL-KK-BLG
4	UA4311-OPQG ^③	4	Steel	#6-350 kcmil	#14-2/0	Horn	40.0	12.0	4.5	O/U	100	RX Opening	U8034-XL-KK
2	UA2B11-OPZA ^④	4	Steel	#6-350 kcmil	#14-2/0	Horn	8.0	25.6	4.5	O/U	100	RX Opening	U2692-RL-TG-KK-BL U2692-XL-KK-BL
3	UA3B11-OPZA ^④	4	Steel	#6-350 kcmil	#14-2/0	Horn	8.0	35.9	4.5	O/U	100	RX Opening	U2693-RL-TG-KK-BL
2	UA2331-OPGP	4	Aluminum	#6-350 kcmil	#14-2/0	Horn	24.0	12.0	4.5	O/U	100	RX Opening	U8032
3	UA3331-OPGP ^②	4	Aluminum	#6-350 kcmil	#14-2/0	Horn	32.0	12.0	4.5	O/U	100	RX Opening	U8033
4	UA4331-OPGP ^②	4	Aluminum	#6-350 kcmil	#14-2/0	Horn	40.0	12.0	4.5	O/U	100	RX Opening	U8034
2	UA2411-XGF ^②	4	Steel	#6-250kcmil	#8-2/0	None	24.0	12.0	4.5	O/U	100	(2) RX Opening	U7632
3	UA3411-XGF	4	Steel	#6-250kcmil	#8-2/0	None	32.0	12.0	4.5	O/U	100	(2) RX Opening	U7633
4	UA4411-XGF	4	Steel	#6-250kcmil	#8-2/0	None	40.0	12.0	4.5	O/U	100	(2) RX Opening	U7634
5	UA5411-XGF	4	Steel	#6-250kcmil	#8-2/0	None	48.0	12.0	4.5	O/U	100	(2) RX Opening	U7635
6	UA6411-XGF	4	Steel	#6-350 kcmil	#8-2/0	None	56.0	12.0	4.5	O/U	100	(2) RX Opening	U7636
150 Amp / Position Ringless Horizontal Multi-Position													
2	UA2313-OPGP ^②	4	Steel	#6-350 kcmil	#6-350 kcmil	Horn	24.0	12.0	4.5	O/U	160	RX Opening	N/A
4	UA4313-OPGP ^②	4	Steel	#6-350 kcmil	#6-350 kcmil	Horn	40.0	12.0	4.5	O/U	160	RX Opening	N/A
2	UA2333-OPGP ^②	4	Aluminum	#6-350kcmil	#14-2/0	Horn	24.0	12.0	4.5	O/U	200	RX Opening	N/A
3	UA3313-OPGP ^②	4	Steel	#6-350kcmil	#14-2/0	Horn	32.0	12.0	4.5	O/U	203	RX Opening	N/A
3	UA3333-OPGP	4	Aluminum	#6-350kcmil	#14-2/0	Horn	32.0	12.0	4.5	O/U	203	RX Opening	N/A
4	UA4333-OPGP	4	Aluminum	#6-350kcmil	#14-2/0	Horn	40.0	12.0	4.5	O/U	270	RX Opening	N/A

All units are UL listed.

Hubs: Please see accessories on page 35.

5th Terminal: Order catalog number H659-0121 for 9 o'clock position.

Connectors: Aluminum connectors, tin plated.

Ground: Units supplied with a ground.

① 7/16" barrel lock KO without bracket installed.

② 7/8" barrel lock KO with bracket installed.

③ Sockets with "QG" suffix have 2 ground lugs.

④ Vertical meter direction.

100/150A Position Meter Mounting Equipment (cont.)





Ringless, Horizontal Gang, 4 Jaw for 1 phase, 3 wire



UA2B11-OPZA




UAT3B-OPZA

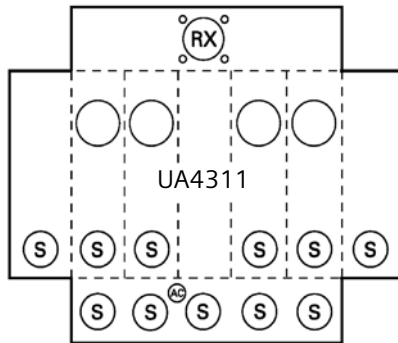

UA2311-OPZA

Knockouts (inches):	
S:	1, 1-1/4, 1-1/2, 2, 2-1/2
AC:	1/4, 1/2
RX:	Ø2.750 HUB OP

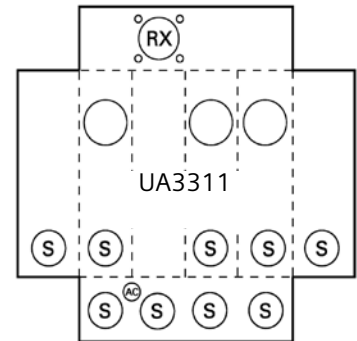

200A/Position Meter Mounting Equipment

Ringless, Horizontal Gang, 4 Jaw for 1 phase, 3 wire 600V AC

No. of Pos	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions			Service	Overall Amperage	Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D				
2	UA2716-0G	4	#6-350 kcmil	#6-350 kcmil	None	24.0	14.5	5.1	O/U	200	RX Opening	N/A
2	UA2717-YPGP ^①	4	#1/0-600 kcmil	#6-350 kcmil	Horn	24.0	14.5	5.1	O/U	200	HD Opening	U1252-R-TG-KK-BLG U1252-X-KK-K3-BLG
2	UA2717-YPQG ^②	4	#1/0-600 kcmil	#6-350 kcmil	Horn	24.0	14.5	5.1	O/U	200	HD Opening	U1252-RRL-KK-K1 U1252-R-TG-KK
3	UA3717-YPGP ^①	4	#1/0-600 kcmil	#6-350 kcmil	Horn	32.0	14.5	5.1	O/U	270	HD Opening	U1253-R-TG-KK-BLG
3	UA3717-YPQG ^②	4	#1/0-600 kcmil	#6-350 kcmil	Horn	32.0	14.5	5.1	O/U	270	HD Opening	U1253-RRL-KK-K1 U1253-R-TG-KK
3	UA3737-YPGP ^③	4	#1/0-600 kcmil	#6-350 kcmil	Horn	32.0	14.5	5.1	O/U	270	HD Opening	N/A
4	UA4719-YPGP ^①	4	(2) #1/0-600 kcmil	#6-350 kcmil	Horn	43.0	14.5	5.1	O/U	360	HD Opening	U1254-R-TG-KK-BLG
4	UA4719-YPQG ^②	4	(2) #1/0-600 kcmil	#6-350 kcmil	Horn	43.0	14.5	5.1	O/U	360	HD Opening	U1254-R-TG-KK
5	UA5719-YPGP ^①	4	(2) #1/0-600 kcmil	#6-350 kcmil	Horn	51.0	14.5	5.1	O/U	450	(2) HD Opening	N/A
5	UA5719-KPQG ^②	4	(2) #1/0-600 kcmil	#6-350 kcmil	Horn	51.0	14.5	5.1	O/U	450	(2) HD Opening	U1255-R-TG-KK
6	UA6719-YPGP ^①	4	(2) #1/0-600 kcmil	#6-350 kcmil	Horn	59.0	14.5	5.1	O/U	528	(2) HD Opening	N/A
6	UA6719-KPQG ^②	4	(2) #1/0-600 kcmil	#6-350 kcmil	Horn	59.0	14.5	5.1	O/U	528	(2) HD Opening	U1256-R-TG-KK
4	UA4719-YPGP ^①	4	(2) #1/0-600 kcmil	#6-350 kcmil	Horn	43.0	14.5	5.1	O/U	360	HD Opening	U1254-R-TG-KK-BLG
5	UA5719-KPGP ^①	4	(2) #1/0-600 kcmil	#6-350 kcmil	Horn	51.0	14.5	5.1	O/U	450	(2) HD Opening	U1255-R-TG-KK-BLG U1255-X-KK-K3-BLG
6	UA6719-KPGP ^①	4	(2) #1/0-600 kcmil	#6-350 kcmil	Horn	59.0	14.5	5.1	O/U	528	(2) HD Opening	U1256-R-TG-KK-BLG
2	UA2737-YPGP	4	#6-350kcmil	#14-2/0	Horn	24.0	14.5	5.1	O/U	200	HD Opening	N/A
4	UA4739-YPGP ^③	4	#6-350kcmil	#14-2/0	Horn	43.0	14.5	5.1	O/U	360	HD Opening	UAP1254
5	UA5739-KPGP ^③	4	#6-350kcmil	#14-2/0	Horn	51.0	14.5	5.1	O/U	450	(2) HD Opening	UAP1255
6	UA6739-KPGP ^③	4	#6-350kcmil	#14-2/0	Horn	59.0	14.5	5.1	O/U	528	(2) HD Opening	UAP1256
2	UA2716-ZGF	4	#6-350kcmil	#6-350kcmil	None	24.0	14.5	5.1	O/U	200	HD Opening	U1252
2	UA2736-ZGF ^③	4	#6-350kcmil	#6-350kcmil	None	24.0	14.5	5.1	O/U	200	HD Opening	UAP1252
3	UA3717-ZGF	4	#6-350kcmil	#6-350kcmil	None	32.0	14.5	5.1	O/U	270	HD Opening	U1253
3	UA3737-ZGF ^③	4	#6-350kcmil	#6-350kcmil	None	32.0	14.5	5.1	O/U	270	HD Opening	UAP1253
4	UA4719-ZGF	4	#1/0-600kcmil	#6-350kcmil	None	40.0	14.5	5.1	O/U	360	HD Opening	U1254
4	UA4739-ZGF ^③	4	#1/0-600kcmil	#6-350kcmil	None	40.0	14.5	5.1	O/U	360	HD Opening	UAP1254
5	UA5719-MGF	4	#1/0-600kcmil	#6-350kcmil	None	48.0	14.5	5.1	O/U	450	(2) HD Opening	U1255
5	UA5739-MGF ^③	4	#1/0-600kcmil	#6-350kcmil	None	48.0	14.5	5.1	O/U	450	(2) HD Opening	UAP1255
6	UA6719-MGF	4	#1/0-600kcmil	#6-350kcmil	None	56.0	14.5	5.1	O/U	528	(2) HD Opening	U1256
6	UA6739-MGF ^③	4	#1/0-600kcmil	#6-350kcmil	None	56.0	14.5	5.1	O/U	528	(2) HD Opening	UAP1256
5	UA5715-MGF	4	#6-350kcmil	#6-350kcmil	None	48.0	14.5	5.1	O/U	450	(2) HD Opening	N/A
6	UA6715-MGF	4	#6-350kcmil	#6-350kcmil	None	56.0	14.5	5.1	O/U	528	(2) HD Opening	N/A
2	UA2714-ZGF	4	#6-350kcmil	#6-350kcmil	None	24.0	14.5	5.1	O/U	200	HD Opening	N/A
3	UA3714-ZGF	4	#6-350kcmil	#6-350kcmil	None	32.0	14.5	5.1	O/U	270	HD Opening	N/A

All units are UL listed.

Hubs: Please see accessories on page 35.

5th Terminal: Order catalog number H659-0121 for 9 o'clock position.

Connectors: Aluminum connectors, tin plated.

Ground: Units supplied with a ground.

① 7/8" barrel lock KO with bracket installed.

② Sockets with "QG" suffix have 2 ground lugs.


③ Aluminum enclosure.

200A/Position Meter Mounting Equipment (cont.)


Ringless, Horizontal Gang, 4 Jaw for 1 phase, 3 wire 600V AC



UA2717-YG

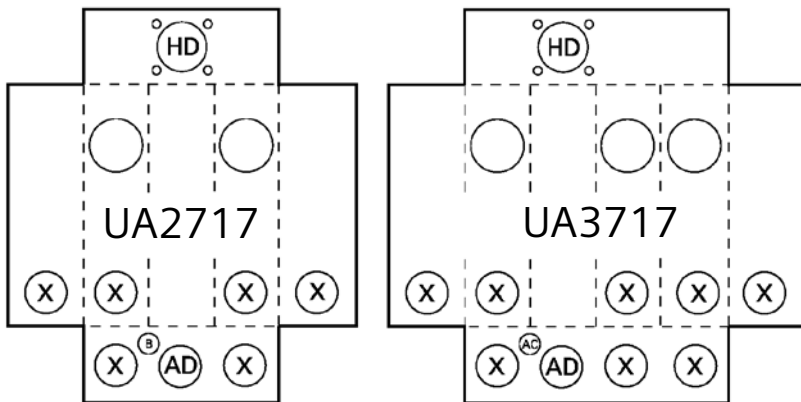

Knockouts (inches):	
X:	1-1/4, 1-1/2, 2, 2-1/2
AC:	1/4, 1/2
AD:	1-1/4, 1-1/2, 2, 2-1/2, 3
HD:	Ø4.281 HUB OP
RX:	Ø2.750 HUB OP

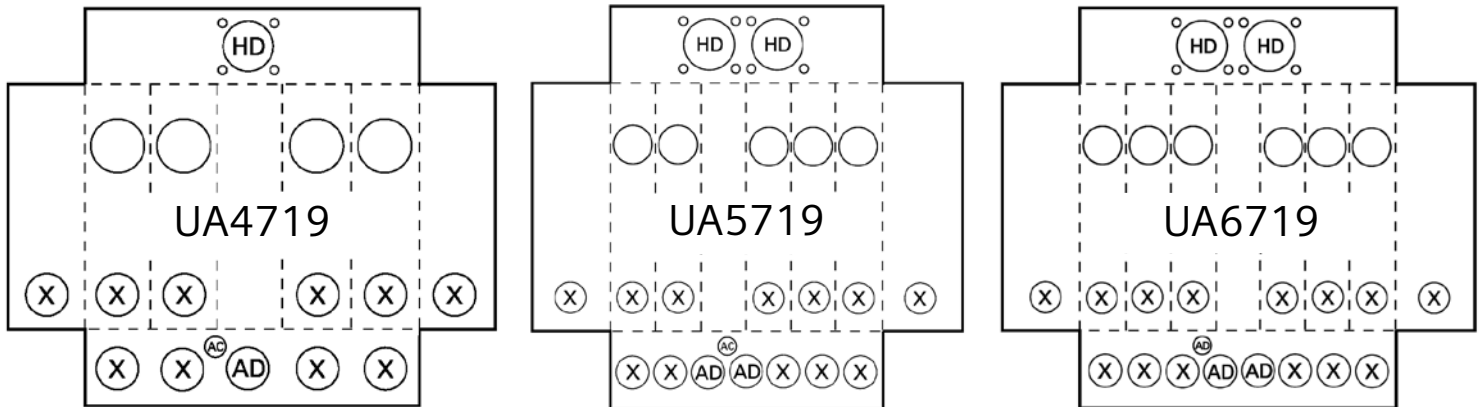

125/200A Meter Mounting Equipment

Ringless, 4, 5, & 7 Jaw, Lever Bypass

125 Amp Ringless

5-7 Terminal for 1 Phase, 3 Wire or 3 Phase, 4 Wire 600V AC

Service	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
O/U	49205-025F	5	#6-350kcmil	#6-350kcmil	Lever	10.0	18.0	5.2	RX Cl. Plate	N/A
O/U	49207-025F	7	#6-350kcmil	#14-2/0	Lever	10.0	18.0	5.2	RX Cl. Plate	U9320-RXL
O/U	49305-025F ^⑥	5	#6-350kcmil	#6-350kcmil	Lever	10.0	18.0	5.2	RX Cl. Plate	N/A
O/U	49307-025F ^⑥	7	#6-350kcmil	#14-2/0	Lever	10.0	18.0	5.2	RX Cl. Plate	N/A

200 Amp Ringless

4 Terminal for 1 Phase, 3 Wire 600V AC

OH	40204-01	4	#6-350 kcmil	#6-350 kcmil	Lever	10.0	17.0	5.2	RX Opening	U1207-RL U3278-RL-TG
O/U	40404-025	4	#6-350 kcmil	#6-350 kcmil	Lever	10.0	17.0	5.2	RX Cl. Plate	U9801-RXL U9801-RXL-QG
O/U	40404-02QG ^④	4	#6-350 kcmil	#6-350 kcmil	Lever	10.0	17.0	5.2	RX Cl. Plate	U9801-RXL-QG U9800-RRL-QG
OH	40804-01QG ^④	4	#6-350 kcmil	#6-350 kcmil	Lever	10.0	17.5	5.2	RX Opening	U9800-RRL
O/U	42504-025 ^②	4	3/8"-24 stud	3/8"-24 stud	Lever	12.8	19.1	5.2	RX Cl. Plate	U9865-RRL
O/U	41904-01GP	4	3/8"-24 stud	3/8"-24 stud	Lever	12.8	28.0	5.2	HD Opening	N/A
O/U	41904-82GP	4	(1) #4-600 or (2) #1/0-250kcmil	(2) #6-350kcmil	Lever	12.8	28.0	5.2	HD Cl. Plate	N/A
O/U	40404-025F	4	#6-350 kcmil	#6-350 kcmil	Lever	12.8	19.1	5.2	RX Cl. Plate	U9801

200 Amp Ringless

5 Terminal for 1/3 Phase, 3 Wire 600V AC

OH	40005-01GP ^⑤	5	#6-350 kcmil	#6-350 kcmil	Lever	10.0	17.5	5.2	RX Opening	N/A
OH	40005-01QG ^{④⑤⑥}	5	#6-350 kcmil	#6-350 kcmil	Lever	10.0	17.5	5.2	RX Opening	U9550-RL-QG
O/U	40405-0BNU	5	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	N/A
O/U	40405-025 ^{④⑤}	5	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	U9551-XL-TG U9581-RXL
O/U	40405-02GP ^⑤	5	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	N/A
O/U	40405-02QG ^{④⑤⑥}	5	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	U9581-RL-QG-AEP
O/U	41405-015F ^⑥	5	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Opening	UAP9581-RL-AEP UAP9551-RL-TG-5T9-HSP
OH-SW	41205-02GP	5	#6-350 kcmil	#6-350 kcmil	Lever	16.3	20.1	5.2	RX Cl. Plate	N/A
O/U	41405-02GP	5	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	UAP9551
UG-SW	41305-02GP	5	1/2" - 24 stud	#6-350kcmil	Lever	16.0	20.1	5.0	RX Cl. Plate	N/A
OH	40005-01F	5	#6-350kcmil	#6-350kcmil	Lever	10.0	17.5	5.0	RX Opening	U9550-RL-TG-5T9-HSP
O/U	40405-015F	5	#6-350kcmil	#6-350kcmil	Lever	12.8	19.0	5.0	RX Opening	U9551-RL-TG-5T9-HSP
O/U	40405-025F	5	#6-350kcmil	#6-350kcmil	Lever	12.8	19.0	5.0	RX Opening	U9551-X-QG-HSP
OH	41005-01F	5	#6-350kcmil	#6-350kcmil	Lever	10.0	17.6	5.0	RX Opening	UAP9550-RL-TG-5T9-HSP
O/U	41405-025F	5	#6-350kcmil	#6-350kcmil	Lever	12.8	19.0	5.0	RX Cl. Plate	UAP9581-RL-AEP
O/U	46705-025F	5	1/2" - 20 stud	1/2" - 20 stud	Lever	12.8	28.0	5.0	RX Cl. Plate	N/A
O/U	46805-025F ^⑥	5	1/2" - 20 stud	1/2" - 20 stud	Lever	12.8	28.0	5.0	RX Cl. Plate	N/A

All units are UL listed.

Hubs: Please see accessories on page 35.

5th Terminal: Order catalog number H659-0121 for 9 o'clock position.

Connectors: Aluminum connectors, tin plated.

Ground: Units supplied with a ground.

① Sockets with "QG" suffix have 2 ground lugs.

② Recommended lugs for 42504-025 are: H55890, single 350 kcmil or H58022, parallel 250 kcmil.

③ These units are not for use with 3 phase, 4 wire service. For 3 wire service only. 5th jaw installed at 6:00.

④ Neutral must be isolated for 3 phase, 3 wire service.

⑤ 7/8" barrel lock KO with bracket installed.

⑥ Aluminum enclosure.

⑦ SW represents an offset design. Meter socket is on the right.

125/200A Meter Mounting Equipment (cont.)

Ringless, 4, 5, & 7 Jaw, Lever Bypass

200 Amp Ringless

7 Terminal for 3 Phase, 4 Wire 600V AC



Service [®]	Catalog Number	# of Terminals	Connectors		Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
UG-SW	9804-9142 [®]	7	#4-600 kcmil	#6-350 kcmil	Lever	16.1	20.1	5.0	RX Cl. Plate	U4910-O-BL U3786-O-BLG U4184-X
OH	40007-01GP [®]	7	#6-350 kcmil	#6-350 kcmil	Lever	10.0	17.0	5.2	RX Opening	U9700-RL-TG-BL
OH	40007-01QG [®]	7	#6-350 kcmil	#6-350 kcmil	Lever	10.0	17.5	5.2	RX Opening	U9700-RRL
O/U	40407-025	7	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	U4701-RL U4701-RRL U9701-XL-TG U4701-RXL U9701-RRL U9701-RXL
O/U	40407-02GP [®]	7	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	N/A
O/U	40407-02QG [®]	7	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	U4701-RL-TG U9701-XL-TG-QG U9701-RXL-QG U9701-X-QG-AEP
O/U-SW	41207-02GP [®]	7	#6-350 kcmil	#6-350 kcmil	Lever	16.3	20.1	5.2	RX Cl. Plate	N/A
O/U-SW	41307-02GP	7	1/2" - 24 stud	#6-350kcmil	Lever	16.0	20.1	5	RX Cl. Plate	N/A
O/U	41407-02GP	7	#6-350 kcmil	#6-350 kcmil	Lever	13.0	19.0	5.0	RX Cl. Plate	UAP9701
OH	40007-01F	7	#6-350kcmil	#6-350kcmil	Lever	10.0	17.5	5.0	RX Opening	U9700-RL-TG-HSP, U9700-RRL-HSP
O/U	40407-015F	7	#6-350kcmil	#6-350kcmil	Lever	12.8	19.0	5.0	RX Opening	U3506-RL-TG-HSP, U9701-RRL-QG-HSP, U9701-RL-TG-HSP
O/U	40407-025F	7	#6-350kcmil	#6-350kcmil	Lever	12.8	19.0	5.0	RX Opening	U9701-X-QG-HSP
OH	41007-01F	7	#6-350kcmil	#6-350kcmil	Lever	10.0	17.6	5.0	RX Opening	UAP9700-RRL-QG-HSP
O/U	41407-025F	7	#6-350kcmil	#6-350kcmil	Lever	12.8	19.0	5.0	RX Cl. Plate	UAP9701-X-QG-AEP
O/U	46707-025F	7	1/2" - 20 stud	1/2" - 20 stud	Lever	12.8	28.0	5.0	RX Cl. Plate	N/A
O/U	46807-025F [®]	7	1/2" - 20 stud	1/2" - 20 stud	Lever	12.8	28.0	5.0	RX Cl. Plate	N/A



40407-025



40405-025

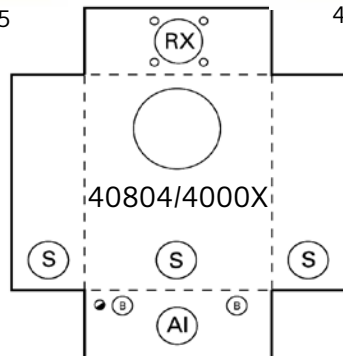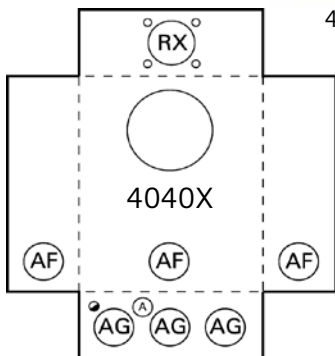

Knockouts (inches):

Ø:	1/4
A:	1/2
B:	1/2, 3/4
S:	1, 1-1/4, 1-1/2, 2, 2-1/2
AF:	1, 1-1/2, 2, 2-1/2, 3
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3
AI:	1, 1-1/4, 1-1/2, 2, 2-1/2, 3
RX:	Ø2.750 HUB OP

Utility specifications may vary. Consult utility prior to installation.

Meter Mounting Equipment for use in Ohio

320A Meter Mounting Equipment

Ringless, 4 & 5 Jaw, Lever Bypass

320 Amp Ringless (400 Amp Max)

4 Terminal for 1 Phase, 3 Wire 600V AC

Service	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
O/U-SW ^①	44604-02 ^①	4	3/8"-24 stud	3/8"-24 stud	Lever	16.0	20.0	5.0	HD Cl. Plate	N/A
O/U	47604-01GP ^②	4	3/8"-24 stud	3/8"-24 stud	Lever	13.0	28.0	5.0	HD Opening	N/A
O/U	47604-81GP ^②	4	#4-600 kcmil	1/0-250 kcmil	Lever	13.0	28.0	5.0	HD Cl. Plate	U3939-R
O/U	47604-02QG ^③	4	3/8"-24 stud	3/8"-24 stud	Lever	13.0	28.0	5.0	HD Cl. Plate	U4702-X
O/U-SW ^①	48104-02	4	3/8"-24 stud	3/8"-24 stud	Lever	16.0	31.0	5.0	HD Cl. Plate	U1432-O U1797-X-TG U2448-X U4702-X-TG U4363-R U4905-X
O/U-SW ^①	48104-02GP ^②	4	3/8"-24 stud	3/8"-24 stud	Lever	16.0	31.0	5.0	HD Cl. Plate	N/A
O/U	48104-82	4	#4-600 kcmil	(2) #6-350 kcmil	Lever	16.0	31.0	5.0	HD Cl. Plate	U1797-O-L3-K2L U1797-O-K3-K2L U1797-O-K3L-K2L
UG	48504-92	4	3/8"-24 stud	3/8"-24 stud	Lever	12.0	28.0	5.0	Blank	U1129-O
UG	48504-846	4	#4-600 kcmil or (2) #4-250 kcmil	(2) #4-250 kcmil	Lever	12.8	28.0	5.0	Blank	U1129-O-K3L-K2L
O/U-SW ^①	48704-82GP ^②	4	#4-600 kcmil or (2) #4-250 kcmil	#4-600 kcmil or (2) #4-250 kcmil	Lever	20.0	34.0	6.0	HD Cl. Plate	U4912-X-K3BLG

320 Amp Ringless (400 Amp Max)

5 Terminal for 3 Phase, 4 Wire 600V AC

O/U	47605-A15F ^④	5	3/8"-24 stud	3/8"-24 stud	Lever	13.0	28.0	5.0	HD Opening	UAP3949-X-HSP U4362-R-K3-K3
O/U	40905-02FL	5	1/2" - 20 stud	1/2" - 20 stud	Lever	16.0	28.0	6.0	HD Cl. Plate	N/A
O/U	41105-02FL ^⑤	5	1/2" - 20 stud	1/2" - 20 stud	Lever	16.0	28.0	6.0	HD Cl. Plate	UAP3313-X-HSP
O/U	46905-02FL ^⑤	5	1/2" - 20 stud	1/2" - 20 stud	Lever	13.0	28.0	5.0	HD Cl. Plate	N/A
O/U	47005-02FL	5	1/2" - 20 stud	1/2" - 20 stud	Lever	13.0	28.0	5.0	HD Cl. Plate	N/A
O/U	47705-02FL	5	1/2" - 20 stud	1/2" - 20 stud	Lever	13.0	28.0	5.0	HD Cl. Plate	U3949-X-HSP
O/U	49005-02FL	5	1/2" - 20 stud	1/2" - 20 stud	Lever	20.3	34.0	6.3	HD Cl. Plate	N/A
O/U	49105-02FL	5	1/2" - 20 stud	1/2" - 20 stud	Lever	20.3	34.0	6.3	HD Cl. Plate	UAP3313-X-HSP

320 Amp Ringless (400 Amp Max)

7 Terminal for 3 Phase, 4 Wire 600V AC

O/U	48707-02 ^⑥	7	3/8"-24 stud	3/8"-24 stud	Lever	20	34.0	6.2	HD Cl. Plate	U2120-X-HSP U2120-X U2594-X U2594-X-TG
O/U	48707-82GP ^{②⑥}	7	3/8"-24 stud	3/8"-24 stud	Lever	20	34.0	6.2	HD Cl. Plate	U4168-X-K7-BLG U2120-X-2/K7
O/U	42007-01GP	7	1/2"-24 stud	1/2"-24 stud	Lever	13.8	28.0	6.0	HD Opening	N/A
O/U	42007-81GP	7	1/2"-24 stud	(2) 1/0-250kcmil	Lever	13.8	28.0	6.0	HD Cl. Plate	N/A
O/U	49007-02FL	7	1/2" - 20 stud	1/2" - 20 stud	Lever	20.3	34.0	6.3	HD Cl. Plate	U3566-X-HSP
O/U	49107-02FL ^⑤	7	1/2" - 20 stud	1/2" - 20 stud	Lever	20.3	34.0	6.3	HD Cl. Plate	UAP3566-X-HSP

All units are UL listed.

Hubs: Please see accessories on page x.

5th Terminal: Please see accessories on page 35.

Connectors: Aluminum connectors, tin plated.

Bypass: Jaw clamping lever bypass, type HQ.

Ground: Units supplied with a ground.

① HQSW (446 prefix) are not UL listed for OH applications.

② 7/8" barrel lock KO with bracket installed.

③ Sockets with "QG" suffix have 2 ground lugs.

④ SW represents an offset design. Meter socket is on the right.

⑤ Aluminum enclosure.

⑥ Anti-inversion clip included.

320A Meter Mounting Equipment (cont.)




Ringless, 4 & 5 Jaw, Lever Bypass



48104-02
(Lugs not included)



48707-02

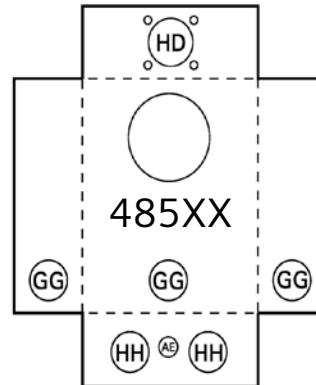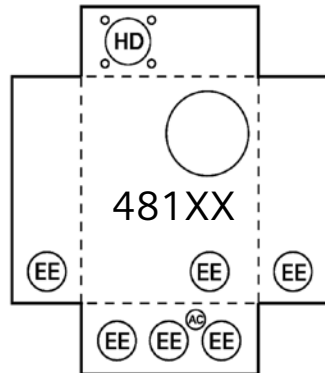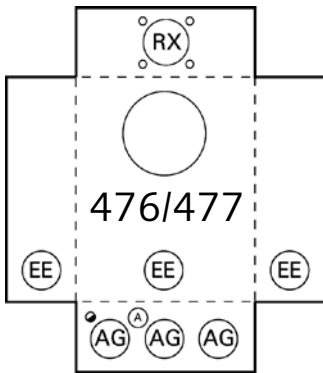

Knockouts (inches):	
Ø:	1/4
A:	1/2
B:	1/2, 3/4
Z:	1-1/2, 2, 2-1/2
EE:	2, 2-1/2, 3
GG:	2-1/2, 3, 3-1/2
HH:	2-1/2, 3, 3-1/2, 4
AC:	1/4, 1/2
AE:	1/4, 1/2, 3/4, 1, 1-1/4
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3
HD:	Ø4.281 HUB OP

320A Meter Mounting Equipment

Ringless, 4, 5, & 7 Jaw, Lever Bypass

320 Amp Ringless (400 Amp Max)

4 Terminal for 1 Phase, 3 Wire 600V AC

Service	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions			Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D		
O/U-SW	44704-82PP ^①	4	3/0-800 kcmil	3/8"-24 stud	Lever	20.0	34.0	6.0	HD Opening	U3939-X U4912-X-K3-BLG

320 Amp Ringless (400 Amp Max)

5 Terminal for 1 Phase, 3 Wire 600V AC

O/U-SW	48705-02FE ^①	5	3/8"-24 stud	3/8"-24 stud	Lever	20.0	34.0	6.0	HD Cl. Plate	U3313-X
O/U-SW	48705-08 ^②	5	3/8"-24 stud	3/8"-24 stud	Lever	20.0	34.0	6.0	HD Cl. Plate	N/A
O/U-SW	49505-82 ^②	5	#4-600 kcmil or (2) #4-250 kcmil	(2) #4-350 kcmil	Lever	16.0	31.0	5.0	HD Cl. Plate	U4362-R-K3-K2
O/I-SW	47205-02FL	5	1/2" - 20 stud	1/2" - 20 stud	Lever	16.2	31.0	6.3	HD Cl. Plate	N/A
O/I-SW	47205-82FL ^②	5	#4-800kcmil or (2) #1/0-250kcmil	(2) #4-350kcmil	Lever	16.2	31.0	6.3	HD Cl. Plate	N/A
O/I-SW	47305-02FL ^②	5	1/2" - 20 stud	1/2" - 20 stud	Lever	16.2	31.0	6.3	HD Cl. Plate	N/A
O/I-SW	47305-82FL	5	#4-800kcmil or (2) #1/0-250kcmil	(2) #4-350kcmil	Lever	16.2	31.0	6.3	HD Cl. Plate	N/A

320 Amp Ringless (400 Amp Max)

7 Terminal for 3 Phase, 4 Wire 600V AC

O/U	47707-01GP ^①	7	1/2"-20 stud	1/2"-20 stud	Lever	14.0	28.0	6.0	HD Opening	N/A
O/U	47707-81GP ^①	7	1/2"-20 stud	1/2"-20 stud	Lever	14.0	28.0	6.0	HD Opening	N/A
O/U-SW	48707-02 ^①	7	3/8"-24 stud	3/8"-24 stud	Lever	20.0	34.0	6.0	HD Cl. Plate	U2120-X-HSP U2120-X U2594-X U2594-X-TG
O/U-SW	48707-02FE ^②	7	3/8"-24 stud	3/8"-24 stud	Lever	20.0	34.0	6.0	HD Cl. Plate	U2594-X-INV
O/U-SW	48707-02GP ^{①②}	7	3/8"-24 stud	3/8"-24 stud	Lever	20.0	34.0	6.0	HD Cl. Plate	N/A
O/U-SW	48707-82GP ^{①②}	7	#4-600 kcmil or (2) #4-250 kcmil	#4-600 kcmil or (2) #4-250 kcmil	Lever	20.0	34.0	6.0	HD Cl. Plate	U4168-X-K7-BLG U2120-X-2/K7
O/U-SW	48907-02GP ^{①②}	7	1/2"-20 stud	1/2"-20 stud	Lever	20.0	34.0	6.2	HD Cl. Plate	N/A
O/U-SW	48907-82GP ^{①②}	7	(1) #4-600 or (2) #1/0-250kcmil	(2) #6-350kcmil	Lever	20.0	34.0	6.2	HD Cl. Plate	UAP4342-R-K7-K6
O/U-SW	44707-02FL	7	1/2" - 20 stud	1/2" - 20 stud	Lever	20.0	34.0	6.2	HD Cl. Plate	U4257
O/U-SW	47407-02FL	7	1/2" - 20 stud	1/2" - 20 stud	Lever	20.0	34.0	6.2	HD Cl. Plate	N/A

All units are UL listed.

Hubs: Please see accessories on page 35.

5th Terminal: Please see accessories on page x

Connectors: Aluminum connectors, tin plated.

Bypass: Jaw clamping lever bypass, type HQ.

Ground: Units supplied with a ground.

Disconnect sleeves should not be used with these devices.

① 7/8" barrel lock KO with bracket installed.

② Aluminum enclosure.

320A Meter Mounting Equipment (cont.)

Ringless, 4, 5, & 7 Jaw, Lever Bypass



48707-82GP







47707-02



48104-02



40107-02DU

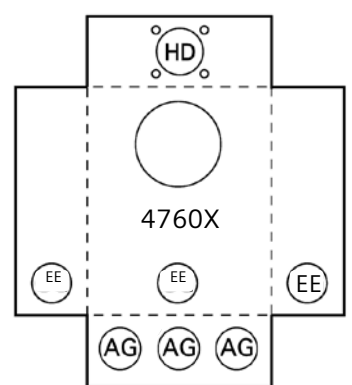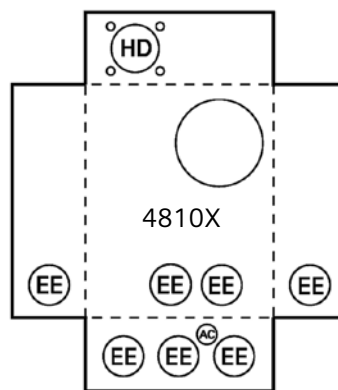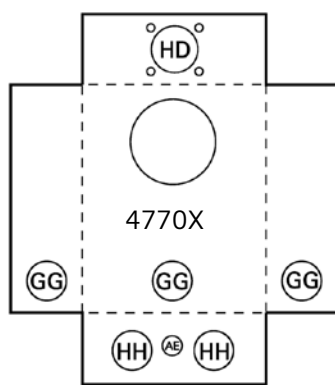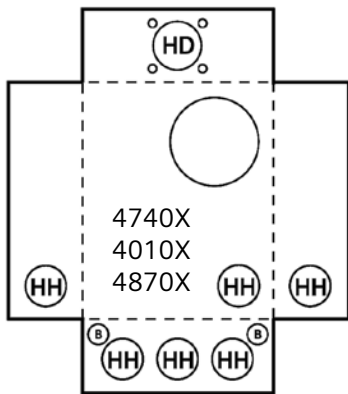

Knockouts (inches):	
B:	1/2, 3/4
EE:	2, 2-1/2, 3
GG:	2-1/2, 3, 3-1/2
HH:	2-1/2, 3, 3-1/2, 4
AC:	1/4, 1/2
AE:	1/4, 1/2, 3/4, 1, 1-1/4
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3
HD:	∅4.281 HUB OP

200A Position Meter Mounting Equipment

Ringless, Horizontal, 5 & 7 Jaw, Lever Bypass

200 Amp / Position Ringless Horizontal Multi-Position 5 Terminal for 1 Phase, 3 wire 600V AC

No. of Pos	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions			Service	Overall Amperage	Hub Provisions	Milbank Equivalent
			Line	Load		W	H	D				
2	404052-223GP [Ⓟ]	5	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	32.8	23.2	6.0	O/U	250	(2) HD Cl. Plates	N/A
3	404053-223GP [Ⓟ]	5	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	43.9	23.2	6.0	O/U	250	(2) HD Cl. Plates	N/A
4	404054-223GP [Ⓟ]	5	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	61.0	23.2	6.0	O/U	300	(2) HD Cl. Plates	N/A
5	404055-223GP [Ⓟ]	5	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	72.1	23.2	6.0	O/U	300	(2) HD Cl. Plates	N/A
6	404056-223GP [Ⓟ]	5	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	83.2	23.2	6.0	O/U	410	(2) HD Cl. Plates	N/A
2	404052-223F	5	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	32.8	23.2	6.0	O/U	250	(2) HD Cl. Plates	N/A
3	404053-223F	5	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	43.9	23.2	6.0	O/U	250	(2) HD Cl. Plates	N/A
4	404054-223F	5	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	61.0	23.2	6.0	O/U	300	(2) HD Cl. Plates	N/A
5	404055-223F	5	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	72.1	23.2	6.0	O/U	300	(2) HD Cl. Plates	N/A
6	404056-223F	5	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	83.2	23.2	6.0	O/U	410	(2) HD Cl. Plates	N/A

200 Amp / Position Ringless Horizontal Multi-Position 7 Terminal for 3 Phase, 4 wire 600V AC

2	404072-223GP [Ⓟ]	7	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	32.8	23.2	6.0	O/U	250	(2) HD Cl. Plates	N/A
3	404073-223GP [Ⓟ]	7	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	43.8	23.2	6.0	O/U	250	(2) HD Cl. Plates	N/A
4	404074-223GP [Ⓟ]	7	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	61.0	23.2	6.0	O/U	300	(2) HD Cl. Plates	N/A
5	404075-223GP [Ⓟ]	7	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	72.1	23.2	6.0	O/U	300	(2) HD Cl. Plates	N/A
6	404076-223GP [Ⓟ]	7	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	83.2	23.2	6.0	O/U	410	(2) HD Cl. Plates	N/A
2	404072-223F	7	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	32.8	23.2	6.0	O/U	250	(2) HD Cl. Plates	N/A
3	404073-223F	7	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	43.8	23.2	6.0	O/U	250	(2) HD Cl. Plates	N/A
4	404074-223F	7	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	61.0	23.2	6.0	O/U	300	(2) HD Cl. Plates	N/A
5	404075-223F	7	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	72.1	23.2	6.0	O/U	300	(2) HD Cl. Plates	N/A
6	404076-223F	7	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	83.2	23.2	6.0	O/U	410	(2) HD Cl. Plates	N/A

All units are UL listed.

Hubs: Please see accessories on page 35.

5th Terminal: Please see accessories on page 35.

Connectors: Aluminum connectors, tin plated.

Bypass: Jaw clamping lever bypass, type HQ.

Ground: Units supplied with a ground.

① 7/8" barrel lock KO with bracket installed.

200A Position Meter Mounting Equipment (cont.)






Ringless, Horizontal, 5 & 7 Jaw, Lever Bypass



404054-223NU



404074-223NU

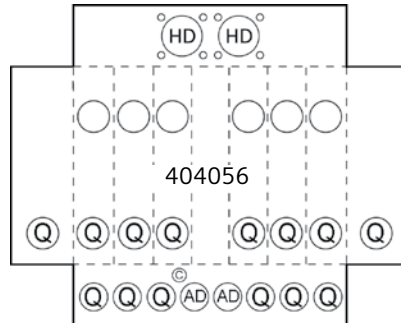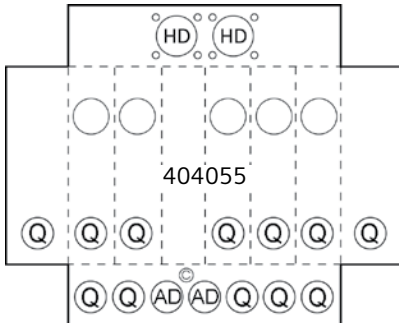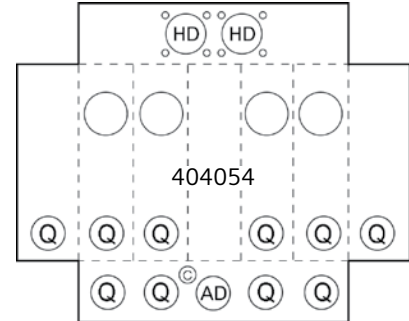

Knockouts (inches):	
C:	1/2, 3/4, 1
Q:	1, 1-1/4, 1-1/2
AD:	1-1/4, 1-1/2, 2, 2-1/2, 3
HD:	Ø4.281 HUB OP

100-200A Meter Mounting Equipment

Ringless, 4 & 5 Jaw, Horn Bypass

100-400 Amp Ringless Meter-Load Center Combination
For 1 Phase, 3 Wire 600V AC

Service	Amp	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions			Hub Provisions	Milbank Equivalent
				Line	Load		W	H	D		
O/U	100	LG0816B1100RBT	5	#6-350 kcmil	#6-350 kcmil	Horn	14.0	32.0	5.0	RX Cl. Plate	N/A
O/U	125	LG0816B1125RBT	5	#6-350 kcmil	#6-350 kcmil	Horn	14.0	32.0	5.0	RX Cl. Plate	N/A
O/U	150	LG0816B1150RBT	5	#6-350 kcmil	#6-350 kcmil	Horn	14.0	32.0	5.0	RX Cl. Plate	N/A
O/U	20	LG0816B1200RBT	5	#6-350 kcmil	#6-350 kcmil	Horn	14.0	32.0	5.0	RX Cl. Plate	N/A
O/U	100	LG0816B1100JLT	5	#6-350 kcmil	#6-350 kcmil	Lever	15.0	34.0	5.4	RX Cl. Plate	U5871-XL-100-5T9-AMS
O/U	150	LG0816B1150RBT	5	#6-350 kcmil	#6-350 kcmil	Horn	14.0	32.0	5.0	HD Opening	N/A
O/U	200	LG0816B1200JLT	5	#6-350 kcmil	#6-350 kcmil	Lever	15	34	5.4	RX Cl. Plate	U5871-XL-200-5T9-AMS
O/U	200	LG0816B1200RBT	5	#6-350 kcmil	#6-350 kcmil	Horn	14.0	32.0	5.0	HD Opening	N/A
OH	400	LG0816B1400RLT ^①	4	#6-350 kcmil	(2) #6-350 kcmil	Lever	27.0	39.0	6.0	HD Cl. Plate	N/A
O/U	200	LG0408B1200RT	4	#6-350 kcmil	#6-350 kcmil	None	30.0	14.0	5.0	RX Cl. Plate	N/A
O/U	200	LG0606L1200R	4	#6-350 kcmil	#6-350 kcmil	None	27.0	14.0	5.0	RX Cl. Plate	U5024-XL
O/U	200	LG0606L1200RA	4	#6-350 kcmil	#6-350 kcmil	None	27.0	14.0	5.0	RX Cl. Plate	UAP5020-XL
O/U	200	LG0816B1200RCT	4	#6-350 kcmil	#6-350 kcmil	None	32.0	14.0	5.0	RX Cl. Plate	U5165-XTL-200
O/U	150	LG2040B1150RB	4	#6-250 kcmil	#6-250 kcmil	Horn	14.0	36.0	5.0	RX Cl. Plate	N/A
O/U	100	LG2040B1200RB	4	#6-250 kcmil	#6-250 kcmil	Horn	14.0	36.0	5.0	RX Cl. Plate	N/A

All units are UL listed.

Hubs: Please see accessories on page 35.

5th Terminal: Please see accessories on page 35.

Connectors: Aluminum connectors, tin plated.

Bypass: Jaw clamping lever bypass, type HQ.

Ground: Units supplied with a ground.

① 200A factory main feedling 08 space 16 circuit interior with feed thru lugs installed. Provision for field installed 200Amp Siemens type QN or Talon type LN breaker available.

100-200A Meter Mounting Equipment (cont.)

Ringless, 4 & 5 Jaw, Horn Bypass



100-320A Meter Mounting Equipment

Ringless, 4 & 5 Jaw

100-320 Amp Ringless Meter-Main 4 Terminal for 1 Phase, 3 wire 240V AC

Amps	Service	Catalog Number	No. of Terminals	5th Terminal	Connectors		Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
					Line	Load		W	H	D		
100	OH	UAB111-OPCH	4	H659-0121	#14-2/0	#6-350 kcmil	Horn	8.0	28.5	4.5	RX Opening	U7375-RL-KK
100	O/U	UAB111-100	4	H659-0121	#14-2/0	See breaker rating	None	10.8	20.8	4.4	RX Cl. Plate	U3499-XL-100
125	O/U	UAB111-XG	4	H659-0121	#14-2/0	See breaker rating	None	10.8	20.8	4.4	RX Cl. Plate	U3989-XL
150	O/U	UAB417-150	4	H659-0121	#6-350 kcmil	#6-350 kcmil	None	11.6	28.8	5.2	RX Cl. Plate	U3491-XL-150 U3990-XL-150
200	OH	UAB317-OPCH	4	H659-0121	#6-250	See breaker rating	Horn	8.0	28.5	4.5	RX Opening	U7607-RL-200-KK
200	O/U	UAB417-XPG	4	H659-0121	#6-250	See breaker rating	None	11.6	28.8	5.2	RX Cl. Plate	U5844-RL U3990-XL
200	O/U	UAB417-200	4	H659-0121	#6-350 kcmil	#6-350 kcmil	None	11.6	28.8	5.2	RX Cl. Plate	U3491-XL-200 U3990-XL-200 U5844-PXL-200
200	UG-SW	UAB877-PG	4	H659-0121	#6-350 kcmil	See breaker rating	None	13.2	25.2	5.2	Blank	U3798-O
200	UG-SW	UAB877-200	4	H659-0121	#6-350 kcmil	#1-300 kcmil	None	13.2	25.2	5.2	Blank	U3798-O-200
125	O/U	LGMM0202B1125RJBX	5	Included	#6-350 kcmil	#2-1/0 CU, 2/0 AL	Horn	18.5	17.0	5.1	RX Cl. Plate	U2351-RXL
150	O/U	LGMM0202B1150RJBX	5	Included	#6-350 kcmil	#1-300 kcmil	Horn	18.5	17.0	5.1	RX Cl. Plate	No Equivalent
200	O/U	LGMM0202B1200RJBX	5	Included	#6-350 kcmil	#1-300 kcmil	Horn	18.5	17.0	5.1	RX Cl. Plate	No Equivalent
320	O/U	LG0404L1400RLM	4	H35815-2	#1-600 kcmil or (2) 1/0-250 kcmil	(2) #4-350kcmil	Lever	27.0	29.0	6.0	HD Cl. Plate	U5890-X-2/200
320	O/U	LG0404B1400RLM	4	H35815-2	#1-600 kcmil or (2) 1/0-250 kcmil	(2) #4-350kcmil	Lever	27.0	29.0	6.0	HD Cl. Plate	N/A
320	O/U	LG0404L1400RLC	4	H35815-2	#1-600 kcmil or (2) 1/0-250 kcmil	(2) #4-350kcmil	Lever	27.0	29.0	6.0	HD Cl. Plate	U5059-X-5T9-2/200-K3L
100	O/U	LG0202B1100RBC	4	H35815-2	#14-2/0	#14-2/0	Horn	11.0	20.8	4.6	RX Cl. Plate	N/A
125	O/U	LG0202B1125RBC	4	H35815-2	#14-2/0	#14-2/0	Horn	11.0	20.8	4.6	RX Cl. Plate	N/A
150	O/U	LG0202B1150RBC	4	H35815-2	#6-250 kcmil	#6-250 kcmil	Horn	11.8	27.8	5.5	RX Cl. Plate	N/A
200	O/U	LG0202B1200RBC	4	H35815-2	#6-250 kcmil	#6-250 kcmil	Horn	11.7	27.8	5.5	RX Cl. Plate	N/A
200	O/U	LG0202L1200RBC	4	H35815-2	#6-250 kcmil	#6-250 kcmil	Horn	11.7	27.8	5.5	RX Cl. Plate	N/A
150	O/U	UAB417-150	5	H35815-3	#14-2/0	#14-2AWG	None	11.6	27.8	5.2	RX Cl. Plate	U3491-XL-150 U3990-XL-150

320 Amp Cold-Sequence Ringless Meter-Main 7 Terminal for 3 Phase, 4 wire 240V AC

Amps	Service	Catalog Number	# of Terminals	5th Jaw	Connectors		Bypass	Dimensions			Hub Provisions	Milbank Equivalent
					Line	Load		W	H	D		
320	OH	LG0303CS3400R	7	N/A	#6-350 kcmil	#6-350 kcmil	Lever	13	43.0	6.0	HD Cl. Plate	U5796-O-400-CB
320	UG	LG0303CS3400RD	7	N/A	#6-350 kcmil	#6-350 kcmil	Lever	13	43.0	6.0	HD Cl. Plate	U5799-O-400CB

All units are UL listed.

Hubs: Please see accessories on page 35.

5th Terminal: See Table.

Connectors: Aluminum connectors, tin plated.

Ground: Units supplied with a ground.

100-320A Meter Mounting Equipment (cont.)

Ringless, 4 & 5 Jaw

Breaker Installed	Breaker Type	AIC
Field Installed	Talon or Siemens type QP	10,000
Factory Installed	100amp Siemens QP	10,000
Field Installed	Talon or Siemens type QP	10,000
Factory Installed	150amp Siemens QN	10,000
Factory Installed	200amp Siemens QJ	10,000
Field Installed	Talon type LN or Siemens type QN	10,000
Factory Installed	200amp Siemens QN	10,000
Field Installed	Talon type LN or Siemens type QN	10,000
Factory Installed	200amp Siemens QN	10,000
Factory Installed	125amp Siemens QPH	22,000
Factory Installed	150amp Siemens QNH	22,000
Factory Installed	200amp Siemens QNH	22,000
Field Installed	Talon type LN or Siemens type QN	22,000
Factory Installed	(2) 200 amp Siemens QN	22,000
Field Installed	(2) Siemens QN(R), QN(R)H, QP, QPH	22,000
Factory Installed	Siemens MBK100	22,000
Factory Installed	Siemens MBK125	22,000
Factory Installed	Siemens MBK150	22,000
Factory Installed	Siemens MBK200	22,000
Field Installed	Siemens MBK200	22,000
Factory Installed	QN2150H	10,000



UAB317-0PCH






UAB417-XG



LGMM0202B1200



LG0404L1400RLM



Breaker Installed	Breaker Type	AIC
Factory Installed	Siemens JXD	65,000
Factory Installed	Siemens JXD	65,000

Breaker table	
Amps	Circuit breaker
100	Q2100
125	Q2125
150	QN2150
200	QN2200
UAB317/417	
200	QJ22B200

Knockouts (inches):	
●	1/4
A:	1/2
C:	1/2, 3/4, 1
S:	1, 1-1/4, 1-1/2, 2, 2-1/2
Z:	1-1/2, 2, 2-1/2
DD:	1-1/4, 1-1/2, 2, 2-1/2, 3
RX:	Ø2.750 HUB OP

200 Amp / Position Meter Mounting Equipment

Ringless Horizontal, 4 Jaw, Horn Bypass

100 - 150 Amp Ringless Direct Burial Meter Pedestal 4 Terminal for 1 Phase, 3 wire 240V AC

No. of Pos.	Amp	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions			Service	Main Type	Mounting Type	Milbank Equivalent
				Line	Load		W	H	D				
1	100	MPO406B1100R	4	#6-250	#6-250	None	14.5	84.0	6.0	UG	Siemens QN 100	Direct Burial	N/A
2	100	MPO406B1100R2	4	#6-250	#6-250	None	19.0	84.0	6.0	UG	Siemens QN 100	Direct Burial	N/A
1	100	MPS0406B1100R	4	#6-250	#6-250	None	14.5	84.0	6.0	UG	Siemens QN 100	Direct Burial	N/A
2	100	MPS0406B1100R2	4	#6-250	#6-250	None	19.0	84.0	6.0	UG	Siemens QN 100	Direct Burial	N/A
1	125	MPO406B1125R	4	(2) #6-350 kcmil	#8-250 kcmil	Lever	14.5	84.0	6.0	UG	Siemens QN 125	Direct Burial	U5240-0-125
2	125	MPO406B1125R2	4	(2) #6-350 kcmil	#8-250 kcmil	None	19.0	84.0	6.0	UG	Siemens QN 125	Direct Burial	U5240-0-125
1	125	MPS0406B1125R	4	(2) #6-350 kcmil	#8-250 kcmil	None	14.5	84.0	6.0	UG	Siemens QN 125	Direct Burial	N/A
2	125	MPS0406B1125R2	4	(2) #6-350 kcmil	#8-250 kcmil	None	19.0	84.0	6.0	UG	Siemens QN 125	Direct Burial	N/A
1	150	MPO406B1150R	4	(2) #6-350 kcmil	#8-250 kcmil	None	14.5	84.0	6.0	UG	Siemens QN 150	Direct Burial	U5240-0-150
2	150	MPO406B1150R2	4	(2) #6-350 kcmil	#8-250 kcmil	None	19.0	84.0	6.0	UG	Siemens QN 150	Direct Burial	U5240-0-150
1	150	MPS0406B1150R	4	(2) #6-350 kcmil	#8-250 kcmil	None	14.5	84.0	6.0	UG	Siemens QN 150	Direct Burial	N/A
2	150	MPS0406B1150R2	4	(2) #6-350 kcmil	#8-250 kcmil	None	19.0	84.0	6.0	UG	Siemens QN 150	Direct Burial	N/A

200 Amp Ringless Direct Burial Meter Pedestal 4 Terminal for 1 Phase, 3 wire 240V AC

No. of Pos.	Amp	Catalog Number	No. of Terminals	Connectors		Bypass	Dimensions			Service	Main Type	Mounting Type	Milbank Equivalent
				Line	Load		W	H	D				
1	200	MPO406B1200RB	4	(2) #6-350 kcmil	#8-250 kcmil	Horn	14.5	84.0	6.0	UG	Siemens QN 200A	Direct Burial	N/A
2	200	MPO406B1200RB2	4	(2) #6-350 kcmil	#8-250 kcmil	Horn	19.0	84.0	6.0	UG	Siemens QN 200A	Direct Burial	N/A
1	200	MPO406B1200R	4	1/0-350kcmil	1/0-350kcmil	None	14.5	84.0	6.0	UG	Siemens QN 200A	Direct Burial	U5240-0-200
2	200	MPO406B1200R2	4	1/0-350kcmil	1/0-350kcmil	None	19.0	84.0	6.0	UG	Siemens QN 200A	Direct Burial	U5240-0-200
1	200	MPO406L1200R	4	1/0-350kcmil	1/0-350kcmil	None	14.5	84.0	6.0	UG	Main Lug	Direct Burial	N/A
2	200	MPO406L1200R2	4	1/0-350kcmil	1/0-350kcmil	None	19.0	84.0	6.0	UG	Main Lug	Direct Burial	N/A
1	200	MPS0406B1200R	4	1/0-350kcmil	1/0-350kcmil	None	14.5	84.0	6.0	UG	Siemens QN 200A	Direct Burial	N/A
2	200	MPS0406B1200R2	4	1/0-350kcmil	1/0-350kcmil	None	19.0	84.0	6.0	UG	Siemens QN 200A	Direct Burial	N/A

All units are UL listed.
Hubs: Please see accessories on page 35.
Connectors: Aluminum connectors, tin plated.
Ground: Units supplied with a ground.



MP0406B1200RJL front



MP0406B1200RJL back



Spa Panels

For use as spa/hot tub service disconnect

Features:

- UL Listed
- Factory installed, 2-pole 50A or 60A GFCI breaker for 240V ground fault protection
- NEMA Type 3R outdoor enclosure
- 2 extra spaces (4 circuits maximum) for additional circuit breakers
- 125 Amp rated interior
- Factory installed 5 position ground bar
- Closure plate included
- Compact enclosure size
- Convenient standard package of 1
- Uses reliable Siemens circuit breakers


Amperage	Catalog Number	Receptacle Provision
30	LGP3S	TT130
50	LGP1S	L1450R




125 & 200 Amp Condominium Meter Paks

120/240V AC, 1 Phase, 3 Wire, Ring Type, 4 Jaw

Continuous Duty Amps Per Pos.	Meter Pos. Per Pak	Vertical or Rectangular	Catalog Number	Dimensions (in.)			Hub Provisions	Main Bus Rating	Line Connectors (Factory Installed)	Milbank Equivalent
				H	W	D				
125	2	Vertical	WTG2211	26.20	13.79	5.81	HD Cl. Plate	200amps	#6-300 kcmil	N/A
	3	Vertical	WTG3311	38.69	25.42	7.56	(2) HD Cl. Plate	300amps	#2-600 kcmil	N/A
	4	Vertical	WTG4411	47.69	25.42	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	5	Rectangular	WTG4511	38.69	38.94	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	6	Rectangular	WTG4611	38.69	38.94	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	4	Vertical	WTG5411	47.69	26.47	7.56	(2) HD Cl. Plate	500amps	(2) #2-600 kcmil	N/A
	5	Rectangular	WTG6511	38.69	40.00	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	N/A
	6	Rectangular	WTG6611	38.69	40.00	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	N/A
200	2	Vertical	WTG4212	29.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	3	Vertical	WTG4312	38.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	4	Vertical	WTG4412	47.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	4	Vertical	WTG6412	47.69	34.41	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	N/A
	5	Rectangular	WTG6512	38.69	46.22	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	N/A
	6	Rectangular	WTG6612	38.69	46.22	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	N/A
	6	Rectangular	WTG8612	38.69	51.03	7.56	(2) HD Cl. Plate	800amps	(2) 1/0-750 kcmil or (4) 1/0-3/0	N/A

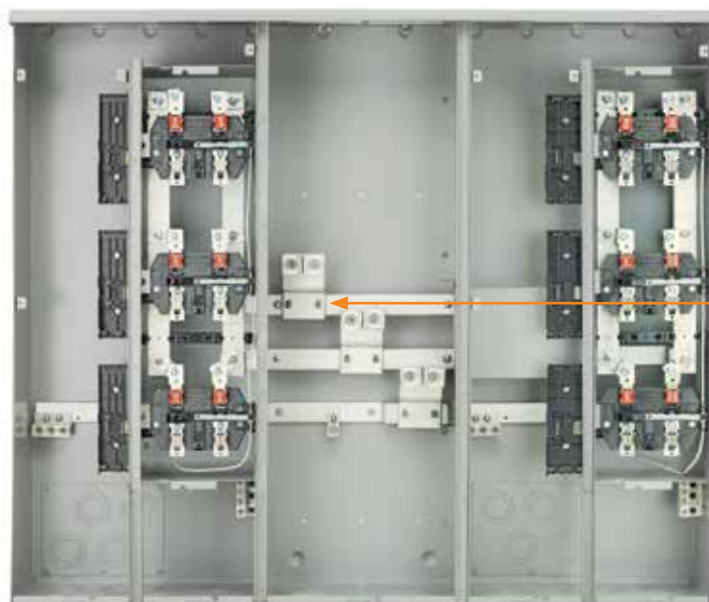

WTG6612

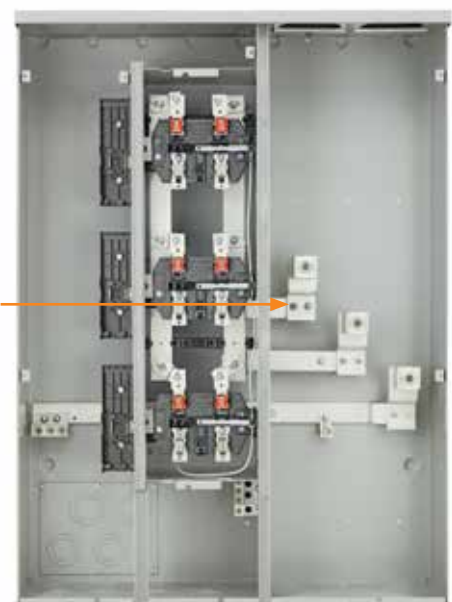

WTG3311

Lugs
factory
installed

Service: Devices are rated for overhead and underground feed.

Hubs: Please see accessories on page 35.

Connectors: Included, see chart above.


Breakers: 125 Amp: use Siemens QP, Murray MP, or Talon LQ 200 Amp: use Siemens QS. See Page 32.

125 & 200 Amp Condominium Meter Paks

120/240V AC, 1 Phase, 3 Wire, Ringless, 5 Jaw

Continuous Duty Amps Per Pos.	Meter Pos. Per Pak	Vertical or Rectangular	Catalog Number	Dimensions (in.)			Hub Provisions	Main Bus Rating	Line Connectors (Factory Installed)	Milbank Equivalent ^①
				H	W	D				
125	2	Vertical	WTG2211RJ	26.20	13.79	5.81	HD Cl. Plate	200amps	#6-300 kcmil	U2852-X
	3	Vertical	WTG3311RJ	38.69	25.42	7.56	(2) HD Cl. Plate	300amps	#2-600 kcmil	U2853-X
	4	Vertical	WTG4411RJ	47.69	25.42	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2854-X
	5	Rectangular	WTG4511RJ	38.69	38.94	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2855-X
	6	Rectangular	WTG4611RJ	38.69	38.94	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2856-X
	5	Rectangular	WTG6511RJ	38.69	40.00	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	None
	6	Rectangular	WTG6611RJ	38.69	40.00	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	None
200	2	Vertical	WTG4212RJ	29.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2862-X
	3	Vertical	WTG4312RJ	38.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2863-X
	4	Vertical	WTG4412RJ	47.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2864-X
	4	Vertical	WTG6412RJ	47.69	34.41	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	None
	5	Rectangular	WTG6512RJ	38.69	46.22	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	U2865-X
	6	Rectangular	WTG6612RJ	38.69	46.22	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	None
	6	Rectangular	WTG8612RJ	38.69	51.04	7.56	(2) HD Cl. Plate	800amps	(2) 1/0-750 kcmil or (4) 1/0-250 or (4) 1/0-3/0	U2866-X

① Milbank equivalents do not come equipped with line side lugs.

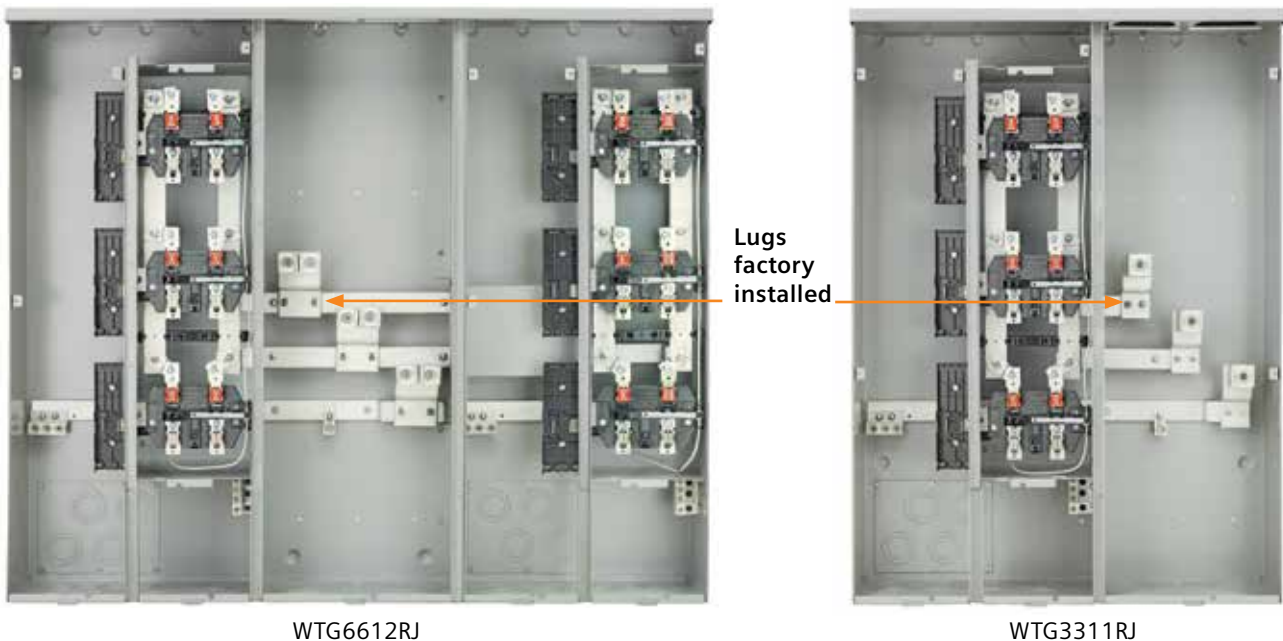

Service: Devices are rated for overhead and underground feed.

Hubs: Please see accessories on page 35.

Connectors: Included, see chart above.


Breakers: 125 Amp: use Siemens QP, Murray MP, or Talon LQ 200 Amp: use Siemens QS. See Page 32.

5th Terminal: Included.


125 & 200 Amp Condominium Meter Paks

120/240V AC, 1 Phase, 3 Wire, Ringless, 5 Jaw, Horn Bypass

Continuous Duty Amps Per Pos.	Meter Pos. Per Pak	Vertical or Rectangular	Catalog Number	Dimensions			Hub Provisions	Main Bus Rating	Line Connectors (Factory Installed)	Milbank Equivalent
				H	W	D				
125	2	Vertical	WTG2211RJB	26.20	13.79	5.81	HD Cl. Plate	200amps	#6-300 kcmil	N/A
	3	Vertical	WTG3311RJB	38.69	25.42	7.56	(2) HD Cl. Plate	300amps	#2-600 kcmil	N/A
	4	Vertical	WTG4411RJB	47.69	25.42	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	5	Rectangular	WTG4511RJB	38.69	38.94	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	6	Rectangular	WTG4611RJB	38.69	38.94	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	5	Rectangular	WTG6511RJB	38.69	40.00	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	N/A
	6	Rectangular	WTG6611RJB	38.69	40.00	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	N/A
200	2	Vertical	WTG4212RJB	29.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	3	Vertical	WTG4312RJB	38.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	4	Vertical	WTG4412RJB	47.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	N/A
	5	Rectangular	WTG6512RJB	38.69	46.22	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	N/A
	6	Rectangular	WTG6612RJB	38.69	46.22	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	N/A

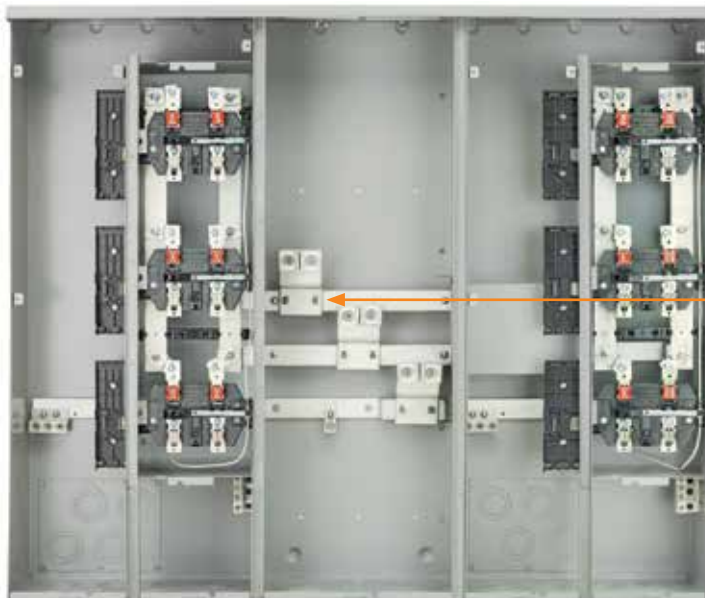

WTG6512RJB

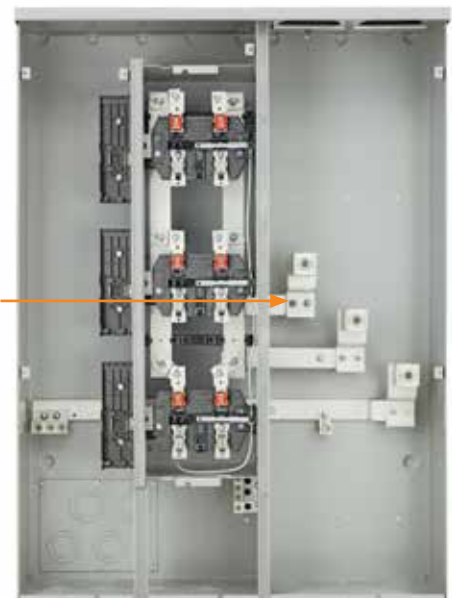

Lugs
factory
installed

WTG3311RJB

Service: Devices are rated for overhead and underground feed.

Hubs: Please see accessories on page 35.

Connectors: Included, see chart above.

Breakers: 125amp: use Siemens QP, Murray MP, or Talon LQ 200amp: use Siemens QS. See Page 32.

5th Terminal: Included.

125 & 200 Amp Condominium Meter Paks

120/240V AC, 1 Phase, 3 Wire, Ringless, 5th or 7th Jaw, Lever Bypass

120/240V AC, 1 Phase, 3 Wire, Ringless, 5th or 7th Jaw, Lever Bypass

Continuous Duty Amps Per Pos.	Meter Pos. Per Pak	Vertical or Rectangular	Catalog Number	Dimensions			Hub Provisions	Main Bus Rating	Line Connectors (Order Lugs From Table Below)	Milbank Equivalent
				H	W	D				
200	2	Vertical	WTGL4212RJ	36.75	33.50	9.00	(2) HD Cl. Plate	400amps	3/8" Studs	U4372-XT-5T9
	3	Vertical	WTGL4312RJ	49.75	33.50	9.00	(2) HD Cl. Plate	400amps	3/8" Studs	U4373-XT-5T9
	4	Vertical	WTGL4412RJ	62.75	33.50	9.00	(2) HD Cl. Plate	400amps	3/8" Studs	U4374-XT-5T9
	5	Rectangular	WTGL6512RJ	49.75	53.38	9.00	(2) HD Cl. Plate	600amps	3/8" Studs	U4375-XT-5T9
	6	Rectangular	WTGL6612RJ	49.75	53.38	9.00	(2) HD Cl. Plate	600amps	3/8" Studs	U4363-XT-5T9

Accepts small 125 Amp & larger 200 Amp breakers

Mounting rail included!



WTGL4412RJ

Connector Kits (order 1 kit for line connections)

L&G Kit #	Milbank Equivalent	Wire Range	Fits Catalog Numbers:
LK11600	K1540	up to (1) 600 kcmil per phase	All WTGLXXXXRJ
LK12350	K1350	up to (2) 350 kcmil per phase	All WTGLXXXXRJ
LK31600	K3441	up to (1) 600 kcmil per phase	All WTGLXXXXRJ
LK32350	K3442	up to (2) 350 kcmil per phase	All WTGLXXXXRJ

Service: Devices are rated for overhead and underground feed.
 Hubs: Please see accessories on page 35.
 Breakers: 125 Amp: use Siemens QP, Murray MP, or Talon LQ
 200 Amp: use Siemens QS.
 5th Terminal: Factory installed at the 9 o'clock position.
 Bypass: Jaw clamping lever bypass, type HQ.
 Connector Kits (order 1 kit for line connections).

TL Series Temporary Power Outlet Panels

Metered Devices

Surface Mount Type



Features

- 125 ampere rating (125A MLO, 100A MB)
- 350 kcmil line side lugs
- Ring or ringless style covers
- Horn or lever bypass options
- Top and bottom feed options
- Factory installed light kit
- Factory installed photocell
- Stainless steel latch and hasp
- Easy to open and close receptacle cover
- Pole-mounted water and CATV/phone kits
- High quality Siemens loadcenter interior and breakers

Pedestal Mount Types



Features

- 125 ampere rating (125A MLO, 100A MB)
- Ring or ringless style covers
- Single and back-to-back configurations
- 350 kcmil loopfeed lugs (back connected)
- Horn bypass option
- Direct burial and pad mount options
- Factory installed light kit
- Factory installed photocell
- Stainless steel latch and hasp
- Easy to open and close receptacle cover
- Pole-mounted water and CATV/phone kits
- High quality Siemens loadcenter interior and breakers



TL Series Temporary Power Outlet Panels

Un-Metered Devices



Features

- 125 ampere rating (125A MLO, 100A MB)
- Loop feed models available
- Factory installed light kit
- Factory installed photocell
- Easy to open and close receptacle cover
- Slim design for 2 receptacle devices (7" wide)
- High quality Siemens loadcenter interior and breakers



Features

- 125 ampere rating (125A MLO, 100A MB)
- 350 kcmil loopfeed lugs (back connected)
- Single or back-to-back configurations
- Direct burial or pad mount options
- Factory installed light kit
- Factory installed photocell
- Easy to open and close receptacle cover
- Externally attached water and CATV/phone kits
- High quality Siemens loadcenter interior and breakers

Pad Mount

Direct Burial

Pedestal Mount
Flange Kit

TL Series Temporary Power Outlet Panels

Build Your Own Catalog Numbering System

Follow the table below to configure a custom catalog number. Contact your local Talon agent or Siemens sales office for price and lead time. User assumes all responsibility for selecting proper configuration.

T ^①

Talon Temporary Power

Main Type

L	Main Lugs, 125A
D	Main Breaker, 100A

Receptacles (3 max)

1		14-50R	125/250V	50A
1F		Designates GFCI Circuit Breaker Protection		
2		14-30R	125/250V	30A
2F		Designates GFCI Circuit Breaker Protection		
3		TT30R	125V	30A
3F		Designates GFCI Circuit Breaker Protection		
4		L6-30R	250V	30A
4F		Designates GFCI Circuit Breaker Protection		
5		6-20R	250V	20A
5F		Designates GFCI Circuit Breaker Protection		
6		L5-20R	125V	20A
6F		Designates GFCI Circuit Breaker Protection		
7		5-20R2GFI	125V	20A
7X		Designates non-weather-resistant GFCI receptacle		
8		5-20R2	125V	20A
8F		Designates GFCI Circuit Breaker Protection		
8G		Designates weather resistant receptacle with GFCI Circuit Breaker Protection		
9		L-530R	125V	30A
9F		Designates GFCI Circuit Breaker Protection		

Meter/Bypass

U	Unmetered
R	Ringless, No Bypass
N	Ring, No Bypass
L*	Ringless, Lever Bypass
H	Ringless, Horn Bypass

*Lever bypass available only in surface mount, topfeed configurations

Enclosure Type

S	Surface mount, un-metered
S2^⑤	Surface mount, un-metered, loop feed lugs
T	surface mount, top feed-metered
B	surface mount, bottom feed-metered
P	Direct burial pedestal
M	Pad mount pedestal
2P	Direct burial pedestal, double-sided
2M	Pad mount pedestal, double sided
C	MEG approved surface mount

Custom Options^②

L^⑥	Light kit factory installed
LP^⑥	Light kit with photocell factory installed
X^⑦	Alternate receptacle configuration on double-sided pedestal
Cx	Custom color configuration
F	Meter Equipment Group Approved

Custom Color Guidelines:

- "Cx" designates custom color. Contact sales office for color code to insert into part number to replace the "x" in this designation.
- Additional charges apply and depend on the color needed.
- Custom color matching available: Customer must signoff on painted sample prior to production of order.
- Order cancellations will involve a fee after custom paint is ordered.

Example: Catalog Number: TL1F37NT-LP

<p>Given specifications:</p> <ul style="list-style-type: none"> • 125A Main Lugs • 50A, 125/250V receptacle with GFCI circuit breaker • 30A, 125V receptacle with a standard circuit breaker • 20A, 125V GFCI weather resistant receptacle • Ring type meter at the top • Pedestal mount device • Light option with photocell 	<p>Step 1 Start with the power receptacle product line prefix identifier and choose the main type: (TL)</p> <p>Step 2 Choose the first receptacle and its circuit breaker type: (1F)</p> <p>Step 3 Choose the second receptacle and its circuit breaker type: (3)</p> <p>Step 4 Choose the third receptacle and its circuit breaker type: (7)</p> <p>Step 5 Choose utility meter & bypass type required: (N)</p> <p>Step 6 Choose enclosure type: (T)</p> <p>Step 7 Add dash and select light option with photocell: (-LP)</p>
---	--

INSTALLER RESPONSIBLE FOR ENSURING UTILITY AND LOCAL CODE ACCEPTANCE

TL Series Temporary Power Outlet Panels

Most common items –See previous page to build your own catalog number

New Catalog Number	Mains Type	Enclosure Type	Meter Provision	Receptacle #1②	Receptacle #2②	Receptacle #3②	Options
--------------------	------------	----------------	-----------------	----------------	----------------	----------------	---------

Surface Mount, Un-Metered

TL17US①	125A Main Lug	Surface Mount	Un-Metered	14-50R	5-20R2 GFI W.R.	N/A	N/A
TL37US①	125A Main Lug	Surface Mount	Un-Metered	TT30R	5-20R2 GFI W.R.	N/A	N/A
TL77US①	125A Main Lug	Surface Mount	Un-Metered	5-20RGFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL137US①	125A Main Lug	Surface Mount	Un-Metered	14-50R	TT30R	5-20R2 GFI W.R.	N/A
TL577US①	125A Main Lug	Surface Mount	Un-Metered	6-20R	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL1F7US	125A Main Lug	Surface Mount	Un-Metered	14-50R, GFCI Brkr	5-20R2 GFI W.R.	N/A	N/A
TL1F3F7US	125A Main Lug	Surface Mount	Un-Metered	14-50R, GFCI Brkr	TT30R, GFCI Brkr	5-20R2 GFI W.R.	N/A
TL5F8G8GUS	125A Main Lug	Surface Mount	Un-Metered	6-20R, GFCI Brkr	5-20R2, GFCI Brkr, W.R.	5-20R2, GFCI Brkr, W.R.	N/A
TL1F3F7US2	125A Main Lug	Surface Mount	Un-Metered	14-50R, GFCI Brkr	TT30R, GFCI Brkr	5-20R2 GFI W.R.	Loop Feed Lugs

Surface Mount, Metered

TL77NT①	125A Main Lug	Top Feed	Metered- Ring	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL77NB①	125A Main Lug	Bottom Feed	Metered- Ring	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL77RT①	125A Main Lug	Top Feed	Metered- Ringless	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL77RB①	125A Main Lug	Bottom Feed	Metered- Ringless	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL137RT①	125A Main Lug	Top Feed	Metered- Ringless	14-50R	TT30R	5-20R2 GFI W.R.	N/A
TL577NT	125A Main Lug	Top Feed	Metered- Ring	6-20R	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL1F77NT	125A Main Lug	Top Feed	Metered- Ring	14-50R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL1F77RB	125A Main Lug	Bottom Feed	Metered- Ringless	14-50R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL5F77NT	125A Main Lug	Top Feed	Metered- Ring	6-20R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL5F77RT	125A Main Lug	Top Feed	Metered- Ringless	6-20R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL5F77RB	125A Main Lug	Bottom Feed	Metered- Ringless	6-20R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A

Pedestal Mount, Metered & Un-Metered

TL137UP	125A Main Lug	Burial Pedestal	Un-Metered	14-50R	TT30R	5-20R2 GFI W.R.	N/A
TL137NP	125A Main Lug	Burial Pedestal	Metered-Ring	14-50R	TT30R	5-20R2 GFI W.R.	N/A
TL1F3F7UP	125A Main Lug	Burial Pedestal	Un-Metered	14-50R, GFCI Brkr	TT30R, GFCI Brkr	5-20R2 GFI W.R.	N/A
TL138GUP	125A Main Lug	Burial Pedestal	Un-Metered	14-50R	TT30R	5-20R2, GFCI Brkr, W.R.	N/A
TL137UP-LP	125A Main Lug	Burial Pedestal	Un-Metered	14-50R	TT30R	5-20R2 GFI W.R.	Light & Photocell
TL137U2P	125A Main Lug	Burial Pedestal-Double Sided	Un-Metered	14-50R	TT30R	5-20R2 GFI W.R.	N/A

Special Accessories

Catalog Number	Description	Notes
TLAWATER③	Water Connection Accessory	Accessories are intended to mount on each side of a direct burial or pad mount pedestal. These accessories can be used independently provided they are mounted on a flat surface. Mounting these accessories to round poles is not recommended.
TLATVP	Television & Phone Connection Accessory	
TLALFB	Loopfeed Replacement Block	Includes (1) assembly. Replacement only.
TLA0816LG	Replacement interior for 10" wide devices	Replacement Only
TLAMS200	TL Series Meter Socket	Replacement Only
TLABULB	TL Series Light Bulb	Replacement Only
TLAPC120V	TL Series Photocell	Replacement Only

① Stocked item. Status subject to change without notice.

② NEMA receptacle configurations listed.

③ Accessory consists of trough only. User must install pipe and water connection point.



Circuit Breakers

Features

- Plug in
- UL listed for use with Talon branded meter combinations
- 1" Frame



Single Pole



Double Pole



4-Pole



Description	Amps	Catalog Number
1-Pole 120V	15	L115
1-Pole 120V	20	L120
2-Pole 120/240V	20	L220
2-Pole 120/240V	30	L230
2-Pole 120/240V	40	L240
2-Pole 120/240V	50	L250
2-Pole 120/240V	60	L260
2-Pole 120/240V	100	L2100
2-Pole 120/240V	125	L2125
4-Pole 120/240V	150	LN2150R
4-Pole 120/240V	200	LN2200R

Accessories	Catalog Number
Single Pole Padlocking Device	ECPLD1
Double Pole Padlocking Device	ECPLD2
4-Pole Padlocking Device	ECPQLN3
Handle Blocking Device (1 & 2 Pole)	ECQL1

Connector Lugs

H55890 #6-350 kcmil	3/8" Stud	H55890-1 #6-350 kcmil	3/8" Stud	H56734 #6-250 kcmil	1/2" Stud	H37892 #4-500 kcmil	1/2" Stud
							
H57606-K (2) #6-350 kcmil	3/8" Stud	H56476 #3/0-800 kcmil	1/2" Stud	H60162 (1) #4-600 kcmil [or] (2) #1/0-250 kcmil	1/2" Stud	H61300 (1) #4-600 kcmil [or] (2) #1/0-250 kcmil	1/2" Stud
							
H58022 (2) #6-250 kcmil	3/8" Stud	H56732 (2) #4-350 kcmil	1/2" Stud	H56732-1 (2) #4-350 kcmil	1/2" Stud	H56732-2 (2) #4-350 kcmil	3/8" Stud
							
H56732-M (2) #4-500 kcmil	1/2" Stud	H68752-1 (3) #6-250 kcmil	1/2" Stud	H56426 (4) #6-350 kcmil	1/2" Stud	H56477 #3/0-800 kcmil	1/2" Stud
							
H56425 (2) #6-350 kcmil	1/2" Stud	H56425-M (2) #4-500 kcmil	1/2" Stud	H58852 #3/0-800 kcmil	1/2" Stud	H56733 #3/0-800 kcmil	1/2" Stud
							
H56427 (2) #6-350 kcmil	1/2" Stud	H56427-M (2) #4-500 kcmil	1/2" Stud	H58853 (2) #6-350 kcmil	1/2" Stud	H59299-1	1/2" Stud
							

Connector Lugs

Pressure type lugs for Talon's stud type meter mounting devices are made of 6061-T6 aluminum to provide high strength and high conductivity. All lugs are tin-plated to ensure low contact resistance and to reduce corrosion.

Allen or hex head pressure screws are furnished to provide excellent conductor spread for maximum binding action with the lug. All Talon lugs are listed with Underwriters Laboratories.

Pressure lug connectors for meter mounting devices


Device Type	Conductor Size	Stud Opening	Pressure Screw Head	Dimensions ^① (Inches)			Anti-Rotation Feature	Catalog Number
				L	W	H		
	#6-350 kcmil	13/32"	9/16" Hex	2-1/4	1-1/8	1-1/4	No	H55890
HQ-4S	#6-350 kcmil	13/32"	5/16" Allen	2-1/4	1-1/8	1-1/4	No	H55890-1
HQ-5 S	#6-350 kcmil	13/32"	3/8" Allen	2-1/4	1-1/8	1-1/4	No	H57606-K
HQ-7S	(2) #6-250 kcmil	13/32"	5/16" Allen	2-3/16	1-5/8	1-3/16	No	H58022
HQ-4D	#4-500 kcmil	9/16"	3/8" Allen	2-13/16	1-1/2	1-9/16	No	H37892
HQ-5DM HQ-7D, HQ-7DF	(1) #4-600 kcmil or (2) #1/0-250 kcmil	9/16"	1/2" Allen	2-13/16	1-3/8	1-13/16	Yes	H60162
							No	H61300
K-4,5,7	(2) #6-350 kcmil	9/16"	5/16" Allen	2-7/8	1-57/64	1-1/4	No	H56425
K-4,5,7	(2) #4-500 kcmil	9/16"	3/8" Allen	2-13/16	2-1/16	1-9/16	No	H56425-M
K-4	(4) #6-350 kcmil	9/16"	5/16" Allen	2-7/8	3-15/16	1-1/4	No	H56426
K-4,5,7	(2) #6-350 kcmil	9/16"	5/16" Allen	4-15/16	1-1/8	2-1/16	Yes	H56427
K-4,5,7	(2) #2-500 kcmil	9/16"	3/8" Allen	4-1/4	1-1/8	1-13/16	Yes	H56427-M
K-5,7	#3/0-800 kcmil	9/16"	1/2" Allen	3-1/4	1-5/16	1-13/16	Yes	H56476
K-4,5,7	#3/0-800 kcmil	9/16"	1/2" Allen	3-1/4	1-5/16	1-13/16	Yes	H56477
K-5,7	(2) #4-500 kcmil	9/16"	3/8" Allen	2-13/16	2-5/32	1-9/16	No	H56490
K-5,7	(2) #4-350 kcmil	9/16"	5/16" Allen	2-7/8	1-59/64	1-1/4	Yes	H56732
K-5,7	(2) #4-350 kcmil	9/16"	5/16" Allen	2-7/8	1-59/64	1-1/4	No	H56732-1
K-5,7	(2) #4-500 kcmil	9/16"	3/8" Allen	2-13/16	2-5/32	1-13/16	Yes	H56732-M
K-4,5,7	#3/0-800 kcmil	9/16"	1/2" Allen	4-3/16	1-3/4	2-3/8	Yes	H56733
K-4,5,7 (Grd.)	#6-250 kcmil	9/16"	5/16" Allen	2-9/16	1-9/32	1-3/16	No	H56734
K-4,5,7	#3/0-800 kcmil	9/16"	1/2" Allen	3-15/16	1-3/4	1-13/16	Yes	H58852
K-4,5,7	(2) #6-350 kcmil	9/16"	5/16" Allen	3-15/16	1-1/8	1-1/2	Yes	H58853
K-4,5,7	(3) #6-250 kcmil	9/16"	5/16" Allen	2-7/8	2-31/64	1-7/16	Yes	H68752-1
K-4 extender	1/2-20 x 1-7/8" Stud	9/16"	None	4-1/4	1-1/4	2-3/8	Yes	H59299-1

Lug Extender

Device type	Stud opening	Stud size	Dimensions (inches)			Catalog Number
			W	H	D	
K-4	9/16"	1/2-20 x 1-7/8"	4-1/4	1-1/4	2-3/8	H59299-1 ^②

① Dimensions do not include height of pressure screw with conductor installed.

② Includes nut and washer assembly and washer.



Accessories

Removable Hub Kits

	Conduit Size (inches)	Catalog Number
 Removable hub	RX Type Hubs Small	
	1	H38596-2
	1-1/4	H38597-2
	1-1/2	H38598-2
	2	H38599-2
	2-1/2	H38600-2
	Cover plate - steel	H38595-1
	Cover plate - aluminum	H38595-2
 Cover plate	HD Type Hubs Large	
	3	H56856-2
	3-1/2	H56857-2
	4	H56858-2
	Cover plate - steel	H56933
	Cover plate - aluminum	H56933-1
 Large to Small Adaptor	Large to Small Adaptor	
	Steel HD to RX	H9747-1113
	Aluminum HD to RX	H9747-1112

K-Base Accessories




	Description	Catalog Number
	K-7 only Isolated Neutral Kit	H69685-1
	K-7 Rotary Bypass - 600 Amp rated	H69623
	K-7 Rake Type Bypass - 600 Amp rated, temp use only	H58888
	K-4 Rake Type Bypass - 600 Amp rated, temp use only	H56495
	Insulated T-Handle Wrench	H69232-1
	Magnetic Hex Socket* *For use on meter Not for use on K7	H69546-1

Connector Kits









(order 2 kits per socket for line & load connections)

L&G Kit #	Milbank Equivalent	Wire Range
LK11350	K1539	up to (1) 350 kcmil per phase
LK11600	K1540	up to (1) 600 kcmil per phase
LK12350	K1350	up to (2) 350 kcmil per phase
LK31600	K3441	up to (1) 600 kcmil per phase
LK32350	K3442	up to (2) 350 kcmil per phase

Sealing Rings


	Description	Catalog Number
	Stainless Steel Snap Type	H54602
	Stainless Steel Screw Type	H9738-8002
	Black plastic meter opening cover	H39968
	Clear plastic meter opening cover (with plug-in feet)	H659-0162

UAT, UAS, MQ and HQ Accessories


	Description	Catalog Number
	Insulated 5th terminal kit - Type AS, AT only	H659-0120
	Meter-load center 5th terminal kit	EC5J2
	Grounded 5th terminal kit - Type AS, AT only	H659-0121
	Anti-Inversion Clip for HQ Sockets	H59676
	MQ 5th terminal kit - 9:00	H8059864
	HQ 5th terminal kit - 9:00 w/o wire	H35815-2
	HQ 5th terminal kit - 9:00 w/ wire	H35815-3
	HQ 5th terminal kit - 9:00 w/ 9" lead	H35815-5*
	*For use with side wired devices only.	
	Grey touch-up paint -TUP61, 12 oz. can	XPT060
	Ground strap kit, HQ-5	35566-1
	Ground lug kit, #14-2	H36503
	Add-on grounding lug for HQ/HQU	H55303
	HQ isolated neutral kit (for 200A only, not for use with 320A) *Includes neutral and isolation block	H64685-1*
	Neutral isolation kit for HQ (for 200A only, not for use with 320A) *Isolates existing neutral	H64690-1*
	Insulated Jumper	H36479
	7/8" Barrel Lock Guard	HBRLOCK
	Lug Kit (2/0 - #4) Meter Combos	ECLK1-2

Watthour Meter Forms


Standard Forms /Transformer Rated or Self-Contained




2 and 3-WIRE FORMS
1S & 2S




2 and 3-WIRE FORMS
1S & 2S with BYPASS




2-WIRE FORM 3S
5th Term. 9 o'clock




2-WIRE FORM 3S
with BYPASS




2-WIRE FORM 3S
5th Term. 6 o'clock




2-WIRE FORM 3S
with BYPASS




2 ELEMENT
3-WIRE NETWORK
FORM 12S 5th
TERM. 9 o'clock




2 ELEMENT 3-WIRE
NETWORK FORM 12S
with BYPASS
5th Term. 9 o'clock




2 ELEMENT
3-WIRE NETWORK
FORM 12S 5th
TERM. 6 o'clock




2 ELEMENT 3-WIRE
NETWORK FORM 12S
with BYPASS
5th Term. 6 o'clock




3-WIRE FORM 4S




3-WIRE FORM 4S
WITH BYPASS




2 or 3 ELEMENT
3Ø4W Y or Δ
Y FORM 14S
Δ FORM 15S




2 or 3 ELEMENT
3Ø4W Y or Δ
FORMS 14S & 15S
with BYPASS




2 ELEMENT
3Ø4W Y or Δ
Y FORM 7S
Δ FORM 24S
with BYPASS




2 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 5S




2 ELEMENT 2Ø3W,
2Ø4W, 3Ø3W
FORM 5S with
BYPASS



2 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 13S




2 or 3 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 13S with
BYPASS




2 or 3 ELEMENT
3Ø4W Y or Δ
Y FORM 9S
Δ FORM 8S


TR = TRANSFORMER RATED
SC = SELF CONTAINED



2 or 3 ELEMENT
3Ø4W Y or Δ
FORMS 8S & 9S
with BYPASS



2 ELEMENT
3Ø4W Y
FORM 6S



2 ELEMENT
3Ø4W Y
FORM 6S
with BYPASS

Energization of Electrical Equipment

Important Information for Installers

Important Note

In addition to national and local electrical codes, many utilities have specific requirements for metering equipment. Always consult the serving utility for their specifications and requirements prior to ordering or installing meter mounting equipment.

Before Energizing

- A. Give equipment a thorough visual examination to determine that:
 - 1) No shipping or installation damage exists.
 - 2) Proper clearances have been maintained.
 - 3) All connections have been made.
 - 4) Equipment is clean and dry.
- B. Make a thorough examination to:
 - 1) Verify tightness of all bolted connections (see table below).
 - 2) Manually operate all circuit breakers, switches, relays, etc.
 - 3) Check rigidity of all mountings, bus bars and components.
 - 4) Use test equipment to check continuity of circuitry and integrity of insulation.
- C. All switches and circuit breakers should be in the "off" position.
- D. Verify that manual meter bypass (if applicable) is in non-bypass position.
- E. Install cover and/or close doors.
- F. If installation is not being energized at this time, follow "after-energizing" steps listed below. These steps will secure the installation in case of accidental energization.

When Energizing

- A. Use caution and follow established safety procedures:
 - 1) Wear safety apparel.
 - 2) Use safety equipment.
 - 3) Take action to prevent injury to yourself and others in the event of failure of the installation.
 - 4) Take action to prevent/decrease damage to property in the event of failure of the installation.
 - 5) If you are unsure how to safely energize the installation, get someone who is knowledgeable to do it.

After Energizing

- A. Secure the installation:
 - 1) To prevent accidental contact with energized parts, cover all openings with approved filler devices.
 - 2) To prevent unauthorized access, secure all covers and/or doors with approved security devices.
 - 3) Attach/post information to advise others of potential hazards associated with the installation.

Materials & Finishes

Reference Information

Materials

Steel Quality

The meter equipment listed in this catalog is made of galvanized steel (AISI* G90) to afford the best possible weather proofing.

*American Iron and Steel Institute.

Steel Sheet

16 gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated. (AISI G90).

14 gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated.

Aluminum Extrusion

Wire-Terminals: Alloy; 6061-T6, Tin-plated for Cu/Al wire.

Bus Bar: Alloy; 6101-O & 6063-O.

Aluminum Sheet

3000 series aluminum sheet, H14, or 5052 series aluminum sheet, H32. Where applicable thicknesses range from .064-.125.

Copper Sheet & Bus

Electrolytic copper with tin plating in most applications.

Insulating Materials

- In most units, support bases for current-carrying components are molded from fiberglass reinforced high-strength, track resistant, thermoset polyester molding compounds.
- Clear or black safety shields and polarity barriers are molded from high-strength, track resistant, polycarbonate molding compounds.
- Various sheet insulating materials, as appropriate for the application are utilized in the fabrication of flat, formed and punched component parts and barriers.

Finish

Process

ANSI 61 grey state-of-the-art electrostatically applied powder paint offers a durable, non-fading finish. For further information concerning the chemical analysis of the weather resistant finish, please contact the factory.

Metal Fasteners

Zinc-coated with a chromate dip.

Terms of Sale, Meter Mounting Device Applications

Terms of sale

Transportation Charges: Prices listed are F.O.B. factory with freight prepaid and allowed on all shipments of orders of \$1,000 net or more for single shipments to one location.

Minimum Billing: \$400 net plus transportation charges.

Cancellation: Orders accepted by the factory can be cancelled only with the factory's consent and upon payment to the seller of reasonable charges incurred by the seller which will indemnify the seller against loss.





Returns: Goods may not be returned to Talon without written authorization from the factory. A minimum 20% restocking charge will be applicable on all returned goods. Credit will be given only for current production items in unopened cartons. All transportation charges paid by Talon will be deducted from such credit.

Terms: Standard/Stock Products:

2% 10th net 25th for invoices dated the 1st through the 15th of the month.

2% 25th net 10th for invoices dated the 16th through the 31st of the month.

Meter Mounting Device Applications

Electrical Service	Service Type	Meter Form	Socket Type	Standard Socket Catalog Number	
1-phase 	Self-contained, 3 wire	2S	4 jaw 100A	AT-1	
			4 jaw 200A	AT-3, AT-4, MQ-4, HQ-4	
		2SE	4 jaw 320A	HQ-4S, HQ-4D	
	Self-contained, bolt-in	2K	K4-400/480A	K-4, K-4UT	
	Transformer-rated, 2 wire	3S!	5 jaw 20A	HQ-6T, HQ-6TS, PTS-6	
	Transformer-rated, 3 wire	4S!	6 jaw 20A	HQ-6T, HQ-6TS	
3-phase, 3 wire or network 	Self-contained	12S	5 jaw 100A	MQ-5, HQ-5	
			12S	5 jaw 200A	MQ-5, HQ-5
			12SE	5 jaw 320A	HQ-5SWT, HQ-5D
	Self contained bolt-in	12K	K-5 480/600A	K-5	
	Transformer-rated	5S	8 jaw 20A	HQ-8T, HQ-8TS, PTS-8	
3-phase, 4 wire  Wye  or Delta	Self-contained	14S	7 jaw 100/200/320A	MQ-7, HW-7	
					15S
					16S
	Self-contained, bolt-in	14K	K-7 480/600A	K-7, K-7T	
		15K			
	Transformer-rated	16K	13 jaw 20A	HQ-13T, HQ-13TS, PTS-13	
		6S			
		8S			
		9S			

Utility Approval Reference

Talon Catalog Number	Page	Amps	Term.	5th Term.	Pos.	Utility Approvals						Milbank Reference	Cross	Talon Catalog Number
						AEP	Duke/Cinergy	DE	DPLC	FEC	HE			
UAT111-OGF	3	135	0	Avail.			O/U					0		UAT111-OGF
UAT111-OPGP	3	135	4	Avail.	1	O/U			O/U	O/U		U7487-RL-TG-KK-BLG		UAT111-OPGP
UAT111-BPGP	3	135	4	Avail.	1	OH				O/U		N/A		UAT111-BPGP
UAT111-XGF	3	135	4/5	Avail.			O/U					U7021-DL-TG		UAT111-XGF
UAT111-XMF	3	135	5	Inst.			O/U					N/A		UAT111-XMF
UAT131-OPGP	3	135	4	Avail.	1	O/U						N/A		UAT131-OPGP
UAT131-BPGP	3	135	4	Avail.	1	O/U						N/A		UAT131-BPGP
UAT131-XGF	3	135	4/5	Avail.			O/U					N/A		UAT131-XGF
UAT317-OGF	4	200	0	Avail.			OH					0		UAT317-OGF
UAT317-OPGP	4	200	4	Avail.	1	OH			O/U	O/U		U7021-RL-TG-KK-BLG		UAT317-OPGP
UAT317-DPGP	4	200	4	Avail.	1	OH				O/U		U7021-DL-TG-KK-BLG		UAT317-DPGP
UAT317-DPQG	4	200	4	Avail.	1			O/U				U7021-DL-TG-KK		UAT317-DPQG
UAT337-OGF	4	200	0	Avail.			OH					0		UAT337-OGF
UAT337-OPGP	4	200	4	Avail.	1	OH						N/A		UAT337-OPGP
UAT417-OPQG	4	200	4	Avail.	1			O/U				U7040-RL-TG-KK		UAT417-OPQG
UAT417-PGF	4	200	4/5	Avail.			UG					U7040		UAT417-PGF
UAT417-PPQG	4	200	4	Avail.	1			O/U				U7040-O-TG-KK		UAT417-PPQG
UAT417-XG	4	200	4	Avail.	1					O/U		U1527-XL U7040-XL-TG		UAT417-XG
UAT417-XGF	4	200	4/5	Avail.			O/U					U7040-XL-TG		UAT417-XGF
UAT417-XPQG	4	200	4	Avail.	1			O/U				U7040-XL-TG-KK		UAT417-XPQG
UAT437-PGF	4	200	4/5	Avail.			UG					UAP7040		UAT437-PGF
UAT437-XGF	4	200	4/5	Avail.			O/U					UAP7040-XL-TG-HSP		UAT437-XGF
UAS817-PPGP	5	200	4	Avail.	1	UG				UG		U4413-O-KK-BLG		UAS817-PPGP
UAS837-XPG	5	200	4	Avail.	1							UAP1980-XL-KK-AEP		UAS837-XPG
UAS877-PGF	5	200	4	Avail.			UG					U1980-O		UAS877-PGF
UAS877-PPGP	5	200	4	Avail.	1	UG				UG		U1980-O-KK-BLG		UAS877-PPGP
UAT777-XGF	5	200	4	Avail.			O/U					N/A		UAT777-XGF
UA2311-OG	6	100	4	Avail.	2			O/U				U8032-RL-TG		UA2311-OG
UA2311-OPGP	6	100	4	Avail.	2	O/U				O/U		U8032-RL-TG-KK		UA2311-OPGP
UA2311-OPQG	6	100	4	Avail.	2			O/U				U8032-XL-KK		UA2311-OPQG
UA2313-OPGP	6	150	4	Avail.	2	O/U						N/A		UA2313-OPGP
UA2331-OPGP	6	135	4	Avail.	2	O/U						N/A		UA2331-OPGP
UA2333-OPGP	6	150	4	Avail.	2	O/U						N/A		UA2333-OPGP
UA2B11-OPZA	6	100	4	Avail.	2					O/U		U2692-RL-TG-KK-BL U2692-XL-KK-BL		UA2B11-OPZA
UA3311-OPGP	6	100	4	Avail.	3	O/U				O/U		U8033-RL-TG-KK-BLG		UA3311-OPGP
UA3311-OPQG	6	100	4	Avail.	3			O/U				U8033-XL-KK		UA3311-OPQG

Key

OH = Overhead feed only
 UG = Underground feed only
 O/U = Overhead (or) underground feed approved

Utility Approval Reference

Ring vs.RL	OH/ UH/ O/U	Lugs max kcmil		BPS	Barrel Lock	Description
		Line	Load			
RL	O/U	#14-2/0	#14-2/0	None	no	TALON 135A 4J RGLS 1POS NO BPS MS OH/UG
RL	O/U	#14-2/0	#14-2/0	Horn	yes	135A 4J RGLS 1POS HRNBPS MS OH/UG 7/8 BL
RL	OH	#14-2/0	#14-2/0	Horn	yes	135A 4J RGLS 1POS HRNBPS MS OH 1.25" HUB
RL	O/U	#14-2/0	#14-2/0	None	no	TALON 135A 4J RGLS 1POS NO BPS MS OH/UG
RL	O/U	#14-2/0	#14-2/0	None	no	TALON 135A 5J RGLS 1POS NO BPS MS OH/UG
RL	O/U	#6-350 kcmil	#6-350 kcmil	Horn	yes	100A 4J RGLS 1POS HRNBPS MS OH/UG AL
RL	O/U	#6-350 kcmil	#6-350 kcmil	Horn	yes	100A 4J RGLS 1POS HRNBPS MS OH-HUB AL
RL	O/U	#14-2/0	#14-2/0	None	no	TALON 135A 4J RGLS 1POS NO BPS MS OH/UG
RL	OH	#6-350kcmil	#6-350kcmil	None	no	TALON 200A 4J RGLS 1POS NO BPS MS OH ST
RL	OH	#6-350 kcmil	#6-350 kcmil	Horn	yes	200A 4J RGLS 1POS HRNBPS MS OH 7/8BL
RL	OH	#6-350 kcmil	#6-350 kcmil	Horn	yes	200A 4J RGLS 1POS HRNBPS MS OH 7/8 WIHUB
RL	OH	#6-350 kcmil	#6-350 kcmil	None	no	200A 4J RGLS 1POS HRNBPS MS OH 2" HUB
RL	OH	#6-350kcmil	#6-350kcmil	None	no	TALON 200A 4J RGLS 1POS NO BPS MS OH ALU
RL	OH	#6-350 kcmil	#6-350 kcmil	Horn	yes	200A 4J RGLS 1POS HRNBPS MS OH AL
RL	O/U	#6-350 kcmil	#6-350 kcmil	Horn	no	200A 4J RGLS 1POS HRNBPS MS OH/UG 2 GRD
RL	UG	#6-350kcmil	#6-350kcmil	None	no	TALON 200A 4J RGLS 1POS NO BPS MS UG SSH
RL	O/U	#6-350 kcmil	#6-350 kcmil	Horn	no	200A 4J RGLS 1POS HRNBPS MS UG-BLANK TOP
RL	O/U	#6-350 kcmil	#6-350 kcmil	None	no	200A 4J RGLS 1POS NO BPS MS OH/UG
RL	O/U	#6-350kcmil	#6-350kcmil	None	no	TALON 200A 4J RGLS 1POS NO BPS MS OH/UG
RL	O/U	#6-350 kcmil	#6-350 kcmil	Horn	no	200A 4J RGLS 1POS HRNBPS MS OH/UG 2 GRD
RL	UG	#6-350kcmil	#6-350kcmil	None	no	TALON 200A 4J RGLS 1POS NO BPS MS UG AL
RL	O/U	#6-350kcmil	#6-350kcmil	None	no	TALON 200A 4J RGLS 1POS NO BPS MS OH/UG
RL	UG	#6-350 kcmil	#6-350 kcmil	Horn	yes	200A 4J RGLS 1POS HRNBPS MS UG-SW 7/16BL
RL	UG	#6-350 kcmil	#6-350 kcmil	Horn	no	200A 4J RGLS 1POS HRNBPS MS UG-SW
RL	UG	#6-350kcmil	#6-350kcmil	None	No	TALON 200A 4J RGLS 1POS NO BPS MS UG-SW
RL	UG	#6-350 kcmil	#6-350 kcmil	Horn	yes	200A 4J RGLS HRNBPS MS UG-SW 7/8BL
RL	O/U	#8-350kcmil	#8-350kcmil	None	no	TALON 200A 4J RGLS 1POS NO BPS MS OH/UG
RL	O/U	#6-350 kcmil	#14-2/0	no	no	100A 4J RGLS 2POS NO BPS MS OH/UG
RL	O/U	#6-350 kcmil	#6-350 kcmil	Horn	yes	100A 4J RGLS 2POS HRNBPS MS OH/UG 7/8 BL
RL	O/U	#6-350 kcmil	#14-2/0	Horn	no	100A 4J RGLS 2POS HRNBPS MS OH/UG 2 GRD
RL	O/U	#6-350 kcmil	#6-350 kcmil	Horn	yes	100A 4J RGLS 2POS HRNBPS MS OH/UG 7/8BL
RL	O/U	#6-350 kcmil	#14-2/0	Horn	yes	100A 4J RGLS 2POS HRNBPS MS OH/UG AL
RL	O/U	#6-350 kcmil	#14-2/0	Horn	yes	150A 4J RGLS 2POS HRNBPS MS OH/UG AL
RL	O/U	#6-350 kcmil	#14-2/0	Horn	no	100A 4J RGLS 2POS HRNBPS MS OH/UG
RL	O/U	#6-350 kcmil	#14-2/0	Horn	yes	100A 4J RGLS 3POS HRNBPS MS OH/UG 7/8BL
RL	O/U	#6-350 kcmil	#14-2/0	Horn	no	100A 4J RGLS 3POS HRNBPS MS OH/UG 2 GRD

Utility Approval Reference

Talon Catalog Number	Page	Amps	Term.	5th Term.	Pos.	Utility Approvals						Milbank Reference	Cross	Talon Catalog Number
						AEP	Duke/Cinergy	DE	DPLC	FEC	HE			
UA3313-OPGP	6	150	4	Avail.	3	O/U						U1233-RRL-KK-K1-BLG		UA3313-OPGP
UA3331-OPGP	6	135	4	Avail.	3	O/U						N/A		UA3331-OPGP
UA3333-OPGP	6	150	4	Avail.	3	O/U						N/A		UA3333-OPGP
UA3B11-OPZA	6	100	4	Avail.	3					O/U		U2693-RL-TG-KK-BL		UA3B11-OPZA
UA4311-OPGP	6	100	4	Avail.	4	O/U				O/U		U8034-RL-TG-KK-BLG U8034-XL-KK-BLG		UA4311-OPGP
UA4311-OPQG	6	100	4	Avail.	4			O/U				U8034-XL-KK		UA4311-OPQG
UA4313-OPGP	6	150	4	Avail.	4	O/U						N/A		UA4313-OPGP
UA4331-OPGP	6	135	4	Avail.	4	O/U						N/A		UA4331-OPGP
UA4333-OPGP	6	150	4	Avail.	4	O/U						N/A		UA4333-OPGP
UAX411-XGF	6	100	4	Avail.			O/U					U8212 U8213 U8214 U8215 U8216		UAX411-XGF
UA2716-OG	8	200	4	Avail.	2					O/U		N/A		UA2716-OG
UA2717-YPGP	8	200	4	Avail.	2	O/U						U1252-R-TG-KK-BLG U1252-X-KK-K3-BLG		UA2717-YPGP
UA2737-YPGP	8	200	4	Avail.	2	O/U						N/A		UA2737-YPGP
UA27x6-ZGF	8	200	4	Avail.			O/U					U1252		UA27x6-ZGF
UA3717-YPGP	8	200	4	Avail.	3	O/U						U1253-R-TG-KK-BLG		UA3717-YPGP
UA3717-YPQG	8	200	4	Avail.	3			O/U				U1253-RRL-KK-KI U1253-R-TG-KK		UA3717-YPQG
UA3737-YPGP	8	200	4	Avail.	3	O/U						N/A		UA3737-YPGP
UA37x7-ZGF	8	200	4	Avail.			O/U					U1253		UA37x7-ZGF
UA4719-YPGP	8	200	4	Avail.	4					O/U		U1254-R-TG-KK-BLG		UA4719-YPGP
UA4719-YPQG	8	200	4	Avail.	4			O/U				U1254-R-TG-KK		UA4719-YPQG
UA4739-YPGP	8	200	4	Avail.	4	O/U						N/A		UA4739-YPGP
UA47x9-ZGF	8	200	4	Avail.			O/U					U1254-XL-TG		UA47x9-ZGF
UA5719-KPGP	8	200	4	Avail.	5					O/U		U1255-R-TG-KK-BLG U1255-X-KK-K3-BLG		UA5719-KPGP
UA5719-YPGP	8	200	4	Avail.	5	O/U						N/A		UA5719-YPGP
UA5739-KPGP	8	200	4	Avail.	5	O/U						N/A		UA5739-KPGP
UA57x9-MGF	8	200	4	Avail.			O/U					U1255-XL-TG		UA57x9-MGF
UA6719-KPGP	8	200	4	Avail.	6					O/U		U1256-R-TG-KK-BLG		UA6719-KPGP
UA6719-KPQG	8	200	4	Avail.	6			O/U				U1256-R-TG-KK		UA6719-KPQG
UA6719-YPGP	8	200	4	Avail.	6	O/U						N/A		UA6719-YPGP
UA6739-KPGP	8	200	4	Avail.	6	O/U						N/A		UA6739-KPGP
UA67x9-MGF	8	200	4	Avail.			O/U					U1256-XL-TG		UA67x9-MGF
UAx711-ZGF	8	200	4	Avail.			O/U					N/A		UAx711-ZGF

Key

OH = Overhead feed only
 UG = Underground feed only
 O/U = Overhead (or) underground feed approved

Utility Approval Reference

Ring vs.RL	OH/ UH/ O/U	Lugs max kcmil		BPS	Barrel Lock	Description
		Line	Load			
RL	O/U	#6-350 kcmil	#14-2/0	Horn	yes	150A 4J RGLS 3POS HRNBPS MS OH/UG ST
RL	O/U	#6-350 kcmil	#14-2/0	Horn	yes	100A 4J RGLS 3POS HRNBPS MS OH/UG AL
RL	O/U	#6-350 kcmil	#14-2/0	Horn	yes	150A 4J RGLS 3POS HRNBPS MS OH/UG AL
RL	O/U	#6-350 kcmil	#14-2/0	Horn	no	100A 4J RGLS 3POS HRNBPS MS OH/UG
RL	O/U	#6-350 kcmil	#14-2/0	Horn	yes	100A 4J RGLS 4POS HRNBPS MS OH/UG 7/8BL
RL	O/U	#6-350 kcmil	#14-2/0	Horn	no	100A 4J RGLS 4POS HRNBPS MS OH/UG 2GRD
RL	O/U	#6-350 kcmil	#6-350 kcmil	Horn	yes	100A 4J RGLS 4POS HRNBPS MS OH/UG 7/8BL
RL	O/U	#6-350 kcmil	#14-2/0	Horn	yes	100A 4J RGLS 4POS HRNBPS MS OH/UG AL
RL	O/U	#6-350 kcmil	#14-2/0	Horn	yes	150A 4J RGLS 4POS HRNBPS MS OH/UG AL
RL	O/U	#6-250kcmil	#8-2/0	None	no	TALON 100A 4J RGLS XPOS NO BPS MS OH/UG
RL	O/U	#6-350 kcmil	#6-350 kcmil	no	no	200A 4J RGLS 2POS NO BPS MS OH/UG
RL	O/U	1/0-600 kcmil	#6-350 kcmil	Horn	yes	200A 4J RGLS 2POS HRNBPS MS OH/UG 7/8BL
RL	O/U	#6-350 kcmil	#14-2/0	Horn	yes	TALON 200A 4J RGLS 2POS HRNBPS OH/UG AL
RL	O/U	#6-350kcmil	#6-350kcmil	None	no	TALON 200A 4J RGLS XPOS NO BPS MS OH/UG
RL	O/U	1/0-600 kcmil	#6-350 kcmil	Horn	yes	200A 4J RGLS 3POS HRNBPS MS OH/UG 7/8BL
RL	O/U	1/0-600 kcmil	#6-350 kcmil	Horn	no	200A 4J RGLS 3POS HRNBPS MS OH/UG 2 GRD
RL	O/U	1/0-600 kcmil	#6-350 kcmil	Horn	yes	200A 4J RGLS 3POS HRNBPS MS OH/UG 7/8BL
RL	O/U	#6-350kcmil	#6-350kcmil	None	no	TALON 200A 4J RGLS XPOS NO BPS MS OH/UG
RL	O/U	(2) 1/0-600 kcmil	#6-350 kcmil	Horn	yes	200A 4J RGLS 4POS HRNBPS MS OH/UG 7/8BL
RL	O/U	(2) 1/0-600 kcmil	#6-350 kcmil	Horn	no	200A 4J RGLS 4POS HRNBPS MS OH/UG 2 GRD
RL	O/U	#6-350 kcmil	#14-2/0	Horn	yes	TALON 200A 4J RGLS 4POS HRNBPS OH/UG AL
RL	O/U	#6-350kcmil	#6-350kcmil	None	no	TALON 200A 4J RGLS XPOS NO BPS MS OH/UG
RL	O/U	(2) 1/0-600 kcmil	#6-350 kcmil	Horn	yes	200A 4J RGLS 5POS HRNBPS MS OH/UG 7/8BL
RL	O/U	(2) 1/0-600 kcmil	#6-350 kcmil	Horn	yes	200A 4J RGLS 5POS HRNBPS MS OH/UG 7/8BL
RL	O/U	#6-350 kcmil	#14-2/0	Horn	yes	TALON 150A 4J RGLS 5POS HRNBPS OH/UG ST
RL	O/U	#6-350kcmil	#6-350kcmil	None	no	TALON 200A 4J RGLS XPOS NO BPS MS OH/UG
RL	O/U	(2) 1/0-600 kcmil	#6-350 kcmil	Horn	yes	200A 4J RGLS 6POS HRNBPS MS OH/UG 7/8BL
RL	O/U	(2) 1/0-600 kcmil	#6-350 kcmil	Horn	no	200A 4J RGLS 6POS HRNBPS MS OH/UG 2 GRD
RL	O/U	(2) 1/0-600 kcmil	#6-350 kcmil	Horn	yes	200A 4J RGLS 6POS HRNBPS MS OH/UG 7/8BL
RL	O/U	(2) 1/0-600 kcmil	#6-350 kcmil	Horn	yes	TALON 150A 4J RGLS 6POS HRNBPS OH/UG ST
RL	O/U	#6-350kcmil	#6-350kcmil	None	no	TALON 200A 4J RGLS XPOS NO BPS MS OH/UG
RL	O/U	#6-350kcmil	#6-350kcmil	None	no	TALON 200A 4J RGLS XPOS NO BPS MS OH/UG

Utility Approval Reference

Talon Catalog Number	Page	Amps	Term.	5th Term.	Pos.	Utility Approvals						Milbank Reference	Cross	Talon Catalog Number
						AEP	Duke/Cinergy	DE	DPLC	FEC	HE			
UAx715-MGF	8	200	4	Avail.			O/U					N/A		UAx715-MGF
UAx71y-ZGF	8	200	4	Avail.			O/U					N/A		UAx71y-ZGF
40005-01GP	10	200	5	9:00	1	OH						N/A		40005-01GP
40005-01QG	10	200	5	6:00	1			OH				U9550-RL-QG		40005-01QG
40007-01F	11	200	7	N/A			OH					U9700-RL-TG-HSP U9700-RRL-HSP		40007-01F
40007-01GP	11	200	7	n/a	1	OH				OH		U9700-RL-TG-BL		40007-01GP
40007-01QG	11	200	7	n/a	1			OH				U9700-RRL		40007-01QG
40204-01	10	200	4	Avail.	1						OH	U1207-RL U3278-RL-TG		40204-01
40404-025	10	200	4	Avail.	1				O/U			U9801-RXL U9801-RXL-QG		40404-025
40404-025F	10	200	4	Avail.			O/U					U9801-RXL		40404-025F
40404-02QG	10	200	4	Avail.	1			O/U				U9801-RXL-QG U9800-RRL-QG		40404-02QG
40405-015F	10	200	5	Inst.			O/U					U9551-RL-TG-5T9-HSP		40405-015F
40405-025	10	200	5	6:00	1					O/U		U9551-XL-TG U9581-RXL		40405-025
40405-025F	10	200	5	Inst.			O/U					U9551-X-QG-HSP		40405-025F
40405-02GP	10	200	5	9:00	1	O/U						N/A		40405-02GP
40405-02QG	10	200	5	6:00	1				O/U			U9581-RL-QG-AEP		40405-02QG
40405-0BNU	10	200	5	9:00	1						O/U	N/A		40405-0BNU
40407-015F	11	200	7	N/A			O/U					U3506-RL-TG-HSP U9701-RRL-QG-HSP U9701-RL-TG-HSP		40407-015F
40407-025	11	200	7	n/a	1				O/U		O/U	U4701-RL U4701-RRL U9701-XL-TG U4701-RXL U9701-RRL U9701-RXL		40407-025
40407-025F	11	200	7	N/A			O/U					U9701-X-QG-HSP		40407-025F
40407-02GP	11	200	7	n/a	1	O/U						N/A		40407-02GP
40407-02QG	11	200	7	n/a	1				O/U			U4701-RL-TG U9701-XL-TG-QG U9701-RXL-QG U9701-X-QG-AEP		40407-02QG
40905-02FL	12	400	5	Inst.			O/U					N/A		40905-02FL
41005-01F	12	200	5	Inst.			OH					UAP9550-RL-TG-5T9-HSP		41005-01F

Key

OH = Overhead feed only
 UG = Underground feed only
 O/U = Overhead (or) underground feed approved

Utility Approval Reference

Ring vs.RL	OH/ UH/ O/U	Lugs max kcmil		BPS	Barrel Lock	Description
		Line	Load			
RL	O/U	#6-350kcmil	#6-350kcmil	None	no	TALON 200A 4J RGLS XPOS NO BPS MS OH/UG
RL	O/U	#6-350kcmil	#6-350kcmil	None	no	TALON 200A 4J RGLS XPOS NO BPS MS OH/UG
RL	OH	#6-350 kcmil	#6-350 kcmil	Lever	yes	200A 5J RGLS 1POS LVRBPS MS OH 7/8BL
RL	OH	#6-350 kcmil	#6-350 kcmil	Lever	no	200A 5J RGLS 1POS LVRBPS MS OH 2 GRD
RL	OH	#6-350kcmil	#6-350kcmil	Lever	no	TALON 200A 7J RGLS 1POS LVRBPS MS OH
RL	OH	#6-350 kcmil	#6-350 kcmil	Lever	yes	200A 7J RGLS 1POS LVRBPS MS OH 7/8 BL
RL	OH	#6-350 kcmil	#6-350 kcmil	Lever	no	200A 7J RGLS 1POS LVRBPS MS OH 2GRD
RL	OH	#6-350 kcmil	#6-350 kcmil	Lever	no	200A 4J RGLS 1POS LVRBPS MS OH
RL	O/U	#6-350 kcmil	#6-350 kcmil	Lever	no	200A 4J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	#6-350kcmil	#6-350kcmil	Lever	no	TALON 200A 4J RGLS LVRBPS MS OH/UG
RL	O/U	#6-350 kcmil	#6-350 kcmil	Lever	no	200A 4J RGLS 1POS LVRBPS MS OH/UG 2GRD
RL	O/U	#6-350kcmil	#6-350kcmil	Lever	no	TALON 200A 5J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	#6-350 kcmil	#6-350 kcmil	Lever	no	200A 5J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	#6-350kcmil	#6-350kcmil	Lever	no	TALON 200A 5J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	#6-350 kcmil	#6-350 kcmil	Lever	yes	200A 5J RGLS 1POS LVRBPS MS OH/UG 7/8BL
RL	O/U	#6-350 kcmil	#6-350 kcmil	Lever	no	200A 5J RGLS 1POS LVRBPS MS OH/UG 2 GRD
RL	O/U	#6-350 kcmil	#6-350 kcmil	Lever	yes	200A 5J RGLS 1POS LVRBPS MS OH/UG 7/16BL
RL	O/U	#6-350kcmil	#6-350kcmil	Lever	no	TALON 200A 7J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	#6-350 kcmil	#6-350 kcmil	Lever	no	200A 7J RGLS 1POS LVRBPS MS OH/UG NO GRD
RL	O/U	#6-350kcmil	#6-350kcmil	Lever	no	TALON 200A 7J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	#6-350 kcmil	#6-350 kcmil	Lever	yes	200A 7J RGLS 1POS LVRBPS MS OH/UG 7/8BL
RL	O/U	#6-350 kcmil	#6-350 kcmil	Lever	no	200A 7J RGLS 1POS LVRBPS MS OH/UG 2 GRD
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 5J RGLS LVRBPS MS OH/UG
RL	OH	#6-350kcmil	#6-350kcmil	Lever	no	TALON HQ-5 MTG DEV, 200 AMP, 3W, BYPASS

Utility Approval Reference

Talon Catalog Number	Page	Amps	Term.	5th Term.	Pos.	Utility Approvals						Milbank Reference	Cross	Talon Catalog Number
						AEP	Duke/Cinergy	DE	DPLC	FEC	HE			
41005-01GP	12	200	5	9:00	1	OH						N/A		41005-01GP
41007-01F	12	200	7	N/A			OH					UAP9700-RRL-QG-HSP		41007-01F
41007-01GP	11	200	7	n/a	1	OH						N/A		41007-01GP
41105-02FL	11	400	4/5	Avail.			O/U					UAP3313-X-HSP		41105-02FL
41205-02GP	11	200	5	9:00	1	OH						N/A		41205-02GP
41207-02GP	11	200	7	n/a	1	O/U						N/A		41207-02GP
41305-02GP	11	200	5		1	O/U						N/A		41305-02GP
41307-02GP	11	200	7	n/a	1	O/U						N/A		41307-02GP
41405-015F	11	200	5	6:00	1			O/U				UAP9581-RL-AEP UAP9551-RL-TG-5T9-HSP		41405-015F
41405-025F	11	200	5	Inst.			O/U					UAP9581-RL-AEP		41405-025F
41405-02GP	11	200	5		1	O/U						UAP9581-RL-AEP-BLG		41405-02GP
41407-025F	11	200	7	Avail.			O/U					UAP9701-X-QG-AEP		41407-025F
41407-02GP	11	200	7	n/a	1	O/U						UAP9701-X-QG-AEP-BLG		41407-02GP
41904-01GP	11	320	4	Avail.	1	O/U						N/A		41904-01GP
41904-82GP	11	320	4	Avail.	1	O/U						UAP4362-R-K3L-K2L-BLG		41904-82GP
42504-025	10	200	4	Avail.	1			O/U-SW				U9865-RRL		42504-025
49205-025F	10	125	5	Inst.			OH					N/A		49205-025F
49207-025F	10	125	7	N/A			OH					U9320RXL		49207-025F
49305-025F	10	125	5	Inst.			OH					N/A		49305-025F
49307-025F	10	125	7	N/A			OH					N/A		49307-025F
9804-9142	11	200	7	n/a	1					UG-SW		U4910-O-BL U3786-O-BLG U4184-X		9804-9142
40005-01F	10	200	5	Inst.			OH					U9550-RL-TG-5T9-HSP		40005-01F
42007-01GP	12	320	7	n/a	1	O/U						N/A		42007-01GP
42007-81GP	12	320	7	n/a	1	O/U						UAP4342-R-K7-K6-BLG		42007-81GP
44604-02	12	320	4	Avail.	1						O/U	N/A		44604-02
47604-01GP	12	320	4	Avail.	1	O/U						N/A		47604-01GP
47604-81GP	12	320	4	Avail.	1	O/U				O/U		U3939-R		47604-81GP
47605-A15F	12	320	5	6:00	1			O/U				UAP3949-X-HSP		47605-A15F
48104-02	12	320	4	Avail.	1			O/U				U1432-O U1797-X-TG U2448-X U4702-X-TG U4363-R U4905-X		48104-02

Key

OH = Overhead feed only
 UG = Underground feed only
 O/U = Overhead (or) underground feed approved

Utility Approval Reference

Ring vs.RL	OH/ UH/ O/U	Lugs max kcmil		BPS	Barrel Lock	Description
		Line	Load			
RL	OH	#6-350 kcmil	#6-350 kcmil	Lever	yes	200A 5J RGLS 1POS LVRBPS MS OH 7/8BL AL ENC
RL	OH	#6-350kcmil	#6-350kcmil	Lever	no	TALON HQ-7 MTG DEV, 200 AMP, 4W, BYPASS
RL	OH	#6-350 kcmil	#6-350 kcmil	Lever	yes	200A 7J RGLS 1POS LVRBPS MS OH 7/8BL AL ENC
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 5J RGLS 1POS LVRBPS MS OH/UG
RL	OH-SW	#6-350 kcmil	#6-350 kcmil	Lever	yes	200A 5J RGLS 1POS LVRBPS MS OH-SW 7/8BL
RL	O/U-SW	#6-350 kcmil	#6-350 kcmil	Lever	yes	200A 7J RGLS 1POS LVRBPS MS OH/UG-SW 7/8BL
RL	UG	1/2"-20 stud	#6-350 kcmil	Lever	yes	200A 5J RGLS 1POS LVRBPS MS UG AL
RL	O/U	1/2"-20 stud	#6-350 kcmil	Lever	yes	200A 7J RGLS 1POS LVRBPS MS UG AL
RL	O/U	#6-350 kcmil	#6-350 kcmil	Lever	no	200A 5J RGLS 1POS LVRBPS MS OH/UG AL ENC
RL	O/U	#6-350kcmil	#6-350kcmil	Lever	no	TALON 200A 5J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	1/2"-20 stud	#6-350 kcmil	Lever	yes	200A 5J RGLS 1POS LVRBPS MS OH/UG AL
RL	O/U	#6-350kcmil	#6-350kcmil	Lever	no	TALON 200A 7J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	1/2"-20 stud	#6-350 kcmil	Lever	yes	200A 7J RGLS 1POS LVRBPS MS OH/UG AL
RL	O/U	1/2"-20 stud	1/2"-20 stud	Lever	yes	320A 4J RGLS 1POS LVRBPS MS OH/UG AL
RL	O/U	#4 AWG-600 kcmil or (2) #1/0 AWG-250kcmil	(2) #6-350kcmil	Lever	yes	320A 4J RGLS 1POS LVRBPS MS OH/UG AL
RL	O/U	3/8"-24 stud	3/8"-24 stud	Lever	no	200A 4J RGLS 1POS LVRBPS MS OH/UG
RL	OH	#6-350kcmil	#6-350kcmil	Lever	no	TALON 125A 5J RGLS LVRBPS MS OH/UG
RL	OH	#6-350kcmil	#6-350kcmil	Lever	no	TALON 125A 7J RGLS LVRBPS MS OH/UG
RL	OH	#6-350kcmil	#6-350kcmil	Lever	no	TALON 125A 5J RGLS LVRBPS MS OH/UG
RL	OH	#6-350kcmil	#6-350kcmil	Lever	no	TALON 125A 7J RGLS LVRBPS MS OH/UG
RL	UG-SW	#4-600 kcmil	#6-350 kcmil	Lever	yes	200A 7J RGLS 1POS LVRBPS MS UG-SW 7/8BL
RL	OH	#6-350kcmil	#6-350kcmil	Lever	no	TALON 200A 5J RGLS 1POS LVRBPS MS OH
RL	O/U	1/2"-20 stud	1/2"-20 stud	Lever	yes	320A 7J RGLS 1POS LVRBPS MS OH/UG AL
RL	O/U	#4 AWG-600 kcmil or (2) #1/0 AWG-250kcmil	(2) #6-350kcmil	Lever	yes	320A 7J RGLS 1POS LVRBPS MS OH/UG AL
RL	O/U-SW	3/8"-24 stud	3/8"-24 stud	Lever	no	320A 4J RGLS 1POS LVRBPS MS OH/UG-SW
RL	O/U	3/8"-24 stud	3/8"-24 stud	Lever	yes	320A 4J RGLS 1POS LVRBPS MS OH/UG 7/8BL
RL	O/U	#4-600 kcmil	1/0-250 kcmil	Lever	yes	320A 4J RGLS 1POS LVRBPS MS OH/UG 7/8BL
RL	O/U	3/8"-24 stud	3/8"-24 stud	Lever	no	320A 5J RGLS 1POS LVRBPS MS OH/UG AL ENC
RL	O/U-SW	3/8"-24 stud	3/8"-24 stud	Lever	no	320A 4J RGLS 1POS LVRBPS MS OH/UG-SW

Utility Approval Reference

Talon Catalog Number	Page	Amps	Term.	5th Term.	Pos.	Utility Approvals						Milbank Cross Reference	Talon Catalog Number
						AEP	Duke/Cinergy	DE	DPLC	FEC	HE		
48104-02GP	12	320	4	Avail.	1	O/U						N/A	48104-02GP
48104-82GP	12	320	4	Avail.	1	O/U						N/A	48104-82GP
48504-92	12	320	4	Avail.	1				UG			U1129-O	48504-92
48704-82GP	12	320	4	Avail.	1	O/U		OH		UG		U4912-X-K3BLG	48704-82GP
49005-02FL	12	400	4/5	Avail.			O/U					N/A	49005-02FL
49007-02FL	12	400	7	N/A			O/U					U3566-X-HSP	49007-02FL
49105-02FL	12	400	4/5	Avail.			O/U					UAP3313-X-HSP	49105-02FL
49107-02FL	12	400	7	N/A			O/U					UAP3566-X-HSP	49107-02FL
44704-82PP	14	320	4	Avail.	1					O/U		U3939-X U4912-X-K3-BLG	44704-82PP
44707-02FL	14	400	7	N/A			O/U					U4257	44707-02FL
46705-025F	10	200	5	Inst.			O/U					N/A	46705-025F
46707-025F	10	200	7	N/A			O/U					N/A	46707-025F
46805-025F	10	200	5	Inst.			O/U					N/A	46805-025F
46807-025F	11	200	7	N/A			O/U					N/A	46807-025F
46905-02FL	12	400	5	Inst.			O/U					N/A	46905-02FL
47005-02FL	12	400	5	Inst.			O/U					N/A	47005-02FL
47205-02FL	14	400	5	Inst.			O/U					N/A	47205-02FL
47205-82FL	14	400	5	Inst.			O/U					N/A	47205-82FL
47305-02FL	14	400	5	Inst.			O/U					N/A	47305-02FL
47305-82FL	14	400	5	Inst.			O/U					N/A	47305-82FL
47407-02FL	14	400	7	N/A			UG					N/A	47407-02FL
47705-02FL	12	400	4/5	Avail.			O/U					U3949-X-HSP	47705-02FL
47707-01GP	14	320	7	n/a	1	O/U						N/A	47707-01GP
47707-81GP	14	320	7	n/a	1	O/U						N/A	47707-81GP
48705-02FE	14	320	5	6:00	1					UG		U3313-X	48705-02FE
48705-08	14	320	5	9:00	1					O/U		N/A	48705-08
48707-02FE	14	320	7	n/a	1					O/U		U2594-X-INV	48707-02FE
48707-02GP	14	320	7	n/a	1	O/U						N/A	48707-02GP
48707-82GP	14	320	7	n/a	1	O/U		OH		UG		U4168-X-K7-BLG U2120-X-2/K7	48707-82GP
48907-02GP	14	320	7	n/a	1	O/U						N/A	48907-02GP
48907-82GP	14	320	7	n/a	1	O/U						UAP2594-X-K7-K6-BLG	48907-82GP
49505-82	14	320	5	9:00	1			O/U				UAP2124-0-HSP U4362-R-K3-K2	49505-82
404052-223GP	16	200	5	n/a	2	O/U						N/A	404052-223GP
404053-223GP	16	200	5	n/a	3	O/U						N/A	404053-223GP

Key

OH = Overhead feed only
 UG = Underground feed only
 O/U = Overhead (or) underground feed approved

Utility Approval Reference

Ring vs.RL	OH/ UH/ O/U	Lugs max kcmil		BPS	Barrel Lock	Description
		Line	Load			
RL	O/U-SW	3/8"-24 stud	3/8"-24 stud	Lever	yes	320A 4J RGLS 1POS LVRBPS MS OH/UG-SW 7/8BL
RL	O/U-SW	3/8"-24 stud	3/8"-24 stud	Lever	yes	320A 4J RGLS 1POS LVRBPS MS OH/UG-SW 7/8BL
RL	UG	3/8"-24 Stud	3/8"-24 Stud	Lever	no	320A 4J RGLS 1POS LVRBPS MS UG
RL	O/U-SW	#4-600 kcmil or (2) #4-250 kcmil	#4-600 kcmil or (2) #4-250 kcmil	Lever	yes	320A 4J RGLS 1POS LVRBPS MS OH/UG-SW
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 5J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 7J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 5J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 7J RGLS 1POS LVRBPS MS OH/UG
RL	O/U-SW	3/0-800 kcmil	3/8"-24 stud	Lever	no	320A 4J RGLS 1POS LVRBPS MS OH/UG-SW
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 7J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 200A 5J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 200A 7J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 200A 5J RGLS LVRBPS MS OH/UG
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 200A 7J RGLS LVRBPS MS OH/UG
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 5J RGLS LVRBPS MS OH/UG
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 5J RGLS LVRBPS MS OH/UG
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 5J RGLS LVRBPS MS OH/UG-SW
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 5J RGLS LVRBPS MS OH/UG-SW
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 5J RGLS LVRBPS MS OH/UG-SW
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 5J RGLS LVRBPS MS OH/UG-SW
RL	UG	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 7J RGLS LVRBPS MS OH/UG
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	no	TALON 320A 5J RGLS 1POS LVRBPS MS OH/UG
RL	O/U	1/2"-20 stud	1/2"-20 stud	Lever	yes	320A 7J RGLS 1POS LVRBPS MS OH/UG 7/8BL
RL	O/U	1/2"-20 stud	1/2"-20 stud	Lever	yes	320A 7J RGLS 1POS LVRBPS MS OH/UG 7/8BL
RL	O/U-SW	3/8"-24 stud	3/8"-24 stud	Lever	yes	320A 5J RGLS 1POS LVRBPS MS OH/UG-SW 7/8BL
RL	O/U-SW	3/8"-24 stud	3/8"-24 stud	Lever	no	320A 5J RGLS 1POS LVRBPS MS OH/UG-SW
RL	O/U-SW	3/8"-24 stud	3/8"-24 stud	Lever	no	320A 7J RGLS 1POS LVRBPS MS OH/UG-SW
RL	O/U-SW	3/8"-24 stud	3/8"-24 stud	Lever	yes	320A 7J RGLS 1POS LVRBPS MS OH/UG-SW 7/8BL
RL	O/U-SW	#4-600 kcmil or (2) #4-250 kcmil	#4-600 kcmil or (2) #4-250 kcmil	Lever	yes	320A 7J RGLS 1POS LVRBPS MS OH/UG-SW 7/8BL
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	yes	320A 7J RGLS 1POS LVRBPS MS UG-SW AL
RL	O/U	1/2" - 20 stud	1/2" - 20 stud	Lever	yes	320A 7J RGLS 1POS LVRBPS MS UG-SW AL
RL	UG-SW	#4-600 kcmil or (2) #4-250 kcmil	(2) #4-350 kcmil	Lever	no	320A 5J RGLS 1POS LVRBPS MS UG-SW W/LUGS
RL	O/U-SW	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	yes	200A 5J RGLS 2POS LVRBPS MS OH/UG 7/8BL
RL	O/U-SW	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	yes	200A 5J RGLS 3POS LVRBPS MS OH/UG 7/8BL

Utility Approval Reference

Talon Catalog Number	Page	Amps	Term.	5th Term.	Pos.	Utility Approvals						Milbank Reference	Cross	Talon Catalog Number
						AEP	Duke/Cinergy	DE	DPLC	FEC	HE			
404054-223GP	16	200	5	n/a	4	O/U						N/A		404054-223GP
404055-223GP	16	200	5	n/a	5	O/U						N/A		404055-223GP
404056-223GP	16	200	5	n/a	6	O/U						N/A		404056-223GP
40405x-223F	16	200	5	Inst.			O/U					N/A		40405x-223F
404072-223GP	16	200	7	n/a	2	O/U						N/A		404072-223GP
404073-223GP	16	200	7	n/a	3	O/U						N/A		404073-223GP
404074-223GP	16	200	7	n/a	4	O/U						N/A		404074-223GP
404075-223GP	16	200	7	n/a	5	O/U						N/A		404075-223GP
404076-223GP	16	200	7	n/a	6	O/U						N/A		404076-223GP
40407x-223F	16	200	7	N/A			O/U					N/A		40407x-223F
LG0202B1100RBC	20	100	4	Avail.	1	O/U						N/A		LG0202B1100RBC
LG0202B1125RBC	20	125	4	Avail.	1	O/U						N/A		LG0202B1125RBC
LG0202B1150RBC	20	150	4	Avail.	1	O/U						N/A		LG0202B1150RBC
LG0202B1200RBC	20	200	4	Avail.	1	O/U						N/A		LG0202B1200RBC
LG0202L1200RBC	20	200	4	Avail.	1	O/U						N/A		LG0202L1200RBC
LG0303CS3400R	20	400	7	n/a	1	OH						N/A		LG0303CS3400R
LG0303CS3400RD	20	400	7	n/a	1	UG						N/A		LG0303CS3400RD
LG0404B1400RLM	20	320	4	9:00	1	O/U						N/A		LG0404B1400RLM
LG0404L1400RLC	20	400	4	Avail.	1	O/U						U5059-X-K3L-BLG		LG0404L1400RLC
LG0404L1400RLM	20	320	4	Avail.	1	O/U				O/U		U5890-X-2/200		LG0404L1400RLM
LG0408B1200RT	18	200	4	Avail.			O/U					N/A		LG0408B1200RT
LG0606L1200R	18	200	4/5	Avail.			O/U					U5024-XL		LG0606L1200R
LG0606L1200RA	18	200	4/5	Avail.			O/U					UAP5020-XL		LG0606L1200RA
LG0816B1100JLT	18	100	5		1	O/U						N/A		LG0816B1100JLT
LG0816B1100RBT	18	100	5	9:00	1	O/U						N/A		LG0816B1100RBT
LG0816B1125RBT	18	125	5	9:00	1	O/U						N/A		LG0816B1125RBT
LG0816B1150RBT	18	150	5	9:00	1	O/U						N/A		LG0816B1150RBT
LG0816B1150RJBT	18	150	5		1	O/U						N/A		LG0816B1150RJBT
LG0816B1200JLT	18	200	5		1	O/U						N/A		LG0816B1200JLT
LG0816B1200RBT	18	200	5	9:00	1	O/U						N/A		LG0816B1200RBT
LG0816B1200RCT	18	200	4	Avail.			O/U					U5165-XTL-200		LG0816B1200RCT
LG0816B1200RJBT	18	200	5		1	O/U						N/A		LG0816B1200RJBT
LG0816B1400RLT	18	320	4	Avail.	1	O/U						U5894-X-2/200		LG0816B1400RLT
LG2040B1150RB	18	150	4	Avail.	1	O/U						N/A		LG2040B1150RB
LG2040B1200RB	18	200	4	Avail.	1	O/U						N/A		LG2040B1200RB

Key

OH = Overhead feed only
 UG = Underground feed only
 O/U = Overhead (or) underground feed approved

Utility Approval Reference

Ring vs.RL	OH/ UH/ O/U	Lugs max kcmil		BPS	Barrel Lock	Description
		Line	Load			
RL	O/U-SW	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	yes	200A 5J RGLS 4POS LVRBPS MS OH/UG 7/8BL
RL	O/U-SW	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	yes	200A 5J RGLS 5POS LVRBPS MS OH/UG 7/8BL
RL	O/U-SW	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	yes	200A 5J RGLS 6POS LVRBPS MS OH/UG 7/8BL
RL	O/U	#6-350kcmil	#6-350kcmil	Lever	no	TALON 200A 5J RGLS XPOS LVRBPS MS OH/UG
RL	O/U-SW	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	yes	200A 7J RGLS 2POS LVRBPS MS OH/UG 7/8BL
RL	O/U-SW	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	yes	200A 7J RGLS 3POS LVRBPS MS OH/UG 7/8BL
RL	O/U-SW	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	yes	200A 7J RGLS 4POS LVRBPS MS OH/UG 7/8BL
RL	O/U-SW	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	yes	200A 7J RGLS 5POS LVRBPS MS OH/UG 7/8BL
RL	O/U-SW	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	yes	200A 7J RGLS 6POS LVRBPS MS OH/UG 7/8BL
RL	O/U	#6-350kcmil	#6-350kcmil	Lever	no	TALON 200A 7J RGLS XPOS LVRBPS MS OH/UG
RL	O/U	#14-2/0	#14-2/0	Horn	yes	100A 4J RGLS 1POS HRNBPS MM OH/UG 7/8BL
RL	O/U	#14-2/0	#14-2/0	Horn	yes	125A 4J RGLS 1POS HRNBPS MM OH/UG 7/8BL
RL	O/U	#6-250 kcmil	#6-250 kcmil	Horn	yes	150A 4J RGLS 1POS HRNBPS MM OH/UG 7/8BL
RL	O/U	#6-250 kcmil	#6-250 kcmil	Horn	yes	200A 4J RGLS 1POS HRNBPS MM OH/UG 7/8BL
RL	O/U	#6-250 kcmil	#6-250 kcmil	Horn	yes	200A 4J RGLS 1POS HRNBPS MM OH/UG 7/8BL
RL	OH	#6-350 kcmil	#1-300 kcmil	Lever	no	320A 4J RGLS 1POS LVRBPS MS UG-SW AL
RL	UG	#6-350 kcmil	#1-300 kcmil	Lever	no	320A 4J RGLS 1POS LVRBPS MS UG-SW AL
RL	O/U	#1-600 kcmil or (2) 1/0-250 kcmil	#1-300 kcmil	Lever	no	320A 4J RGLS LVRBPS MTRMAIN OH/UG
RL	O/U	#6-350 kcmil	#1-300 kcmil	Lever	no	320A 5J RGLS LVRBPS MTR MAIN MLO
RL	O/U	#1-600 kcmil or (2) 1/0-250 kcmil	Blank	Lever	no	320A 4J RGLS LVRBPS MTRMAIN OH/UG
RL	O/U	#4-250kcmil	n/a	None	no	TALON METER COMBO L/C 200A 8CKT W/SUBFEE
RL	O/U	#4-250kcmil	n/a	None	no	TALON METER COMBO LC 200A 6/6 CKT
RL	O/U	#4-250kcmil	n/a	None	no	TALON 14METER COMBO LC 200A 6/6 CKT 2P B
RL	O/U	#6-350 kcmil	#6-350 kcmil	Lever	no	100A 8S/16C MTR COMB OH/UG LVR BPS
RL	O/U	#6-350 kcmil	#6-350 kcmil	Horn	yes	100A 5J RGLS 8S/16C HRNBPS MTRCMB OH/UG
RL	O/U	#6-350 kcmil	#6-350 kcmil	Horn	yes	125A 5J RGLS 8S/16C HRNBPS MTRCMB OH/UG
RL	O/U	#6-350 kcmil	#6-350 kcmil	Horn	yes	150A 5J RGLS 8S/16C HRNBPS MTRCMB OH/UG
RL	O/U	#6-350 kcmil	#6-350 kcmil	Horn	no	0
RL	O/U	#6-350 kcmil	#6-350 kcmil	Lever	no	200A 8S/16C MTR COMB OH/UG LVR BPS
RL	O/U	#6-350 kcmil	#6-350 kcmil	Horn	yes	200A 5J RGLS 8S/16C HRNBPS MTRCMB OH/UG
RL	O/U	#4-250kcmil	n/a	None	no	TALON METER COMBO L/C 200A 8CKT W/SUBF
RL	O/U	#6-350 kcmil	#6-350 kcmil	Horn	no	0
RL	O/U	#6-350 kcmil	#1-300 kcmil	Lever	no	320A 4J RGLS 1POS LVRBPS MTRCMB OH/UG
RL	O/U	#6-250 kcmil	#6-250 kcmil	Horn	yes	150A 4J RGLS 20/40 HRNBPS MTRCMB OH/UG
RL	O/U	#6-250 kcmil	#6-250 kcmil	Horn	yes	200A 4J RGLS 20/40 HRNBPS MTRCMB OH/UG

Utility Approval Reference

Talon Catalog Number	Page	Amps	Term.	5th Term.	Pos.	Utility Approvals						Milbank Reference	Cross	Talon Catalog Number
						AEP	Duke/Cinergy	DE	DPLC	FEC	HE			
LGMM0202B1125RJBX	20	125	5	9:00	1					O/U		U2351-RXL		LGMM0202B1125RJBX
LGMM0202B1150RJBX	20	150	5	9:00	1					O/U		N/A		LGMM0202B1150RJBX
LGMM0202B1200RJBX	20	200	5	9:00	1					O/U		N/A		LGMM0202B1200RJBX
UAB111-XG	20	100	4	Avail.			O/U					U3499-XL		UAB111-XG
UAB317-0PCH	20	200	4	Avail.	1					O/U		U7607-RL-200-KK		UAB317-0PCH
UAB417-150	20	150	4/5	Avail.			O/U					U3491-XL-150 U3990-XL-150		UAB417-150
UAB417-200	20	200	4/5	Avail.			O/U					U3491-XL-200 U3990-XL-200 U5844-PXL-200		UAB417-200
UAB417-XPG	20	200	4	Avail.			O/U					U5844-RL, U3990-XL		UAB417-XPG
MP0406B1100R	22	100	4	Avail.			UG							MP0406B1100R
MP0406B1100R2	22	100	4	Avail.			UG							MP0406B1100R2
MP0406B1125R	22	125	4	Avail.			UG					U5240-0-125		MP0406B1125R
MP0406B1125R2	22	125	4	Avail.			UG					U5240-0-125		MP0406B1125R2
MP0406B1150R	22	150	4	Avail.			UG					U5240-0-150		MP0406B1150R
MP0406B1150R2	22	150	4	Avail.			UG					U5240-0-150		MP0406B1150R2
MP0406B1200R	22	200	4	Avail.			UG					U5240-0-200		MP0406B1200R
MP0406B1200R2	22	200	4	Avail.			UG					U5240-0-200		MP0406B1200R2
MP0406B1200RB	22	200	5	6:00	1	UG						N/A		MP0406B1200RB
MP0406B1200RB2	22	200	5	6:00	1	UG						N/A		MP0406B1200RB2
MP0406L1200R	22	200	4	Avail.			UG					N/A		MP0406L1200R
MP0406L1200R2	22	200	4	Avail.			UG					N/A		MP0406L1200R2
MPS0406B1100R	22	100	4	Avail.			UG					N/A		MPS0406B1100R
MPS0406B1100R2	22	100	4	Avail.			UG					N/A		MPS0406B1100R2
MPS0406B1125R	22	125	4	Avail.			UG					N/A		MPS0406B1125R
MPS0406B1125R2	22	125	4	Avail.			UG					N/A		MPS0406B1125R2
MPS0406B1150R	22	150	4	Avail.			UG					N/A		MPS0406B1150R
MPS0406B1150R2	22	150	4	Avail.			UG					N/A		MPS0406B1150R2
MPS0406B1200R	22	200	4	Avail.			UG					N/A		MPS0406B1200R
MPS0406B1200R2	22	200	4	Avail.			UG					N/A		MPS0406B1200R2
TLxxRT	31	125	4/5	Avail.			OH					N/A		TLxxRT
TLxxxRC	31	125	4/5	Avail.			UG					N/A		TLxxxRC
TLxxxRM	31	125	4/5	Avail.			UG					N/A		TLxxxRM
TLxxxRP-F	31	125	4/5	Avail.			UG					N/A		TLxxxRP-F
WTG10612RJ	25	225	5	Inst.			O/U					N/A		WTG10612RJ
WTG10612RJB	26	1000	5	9:00	6	O/U						N/A		WTG10612RJB

Key

OH = Overhead feed only
 UG = Underground feed only
 O/U = Overhead (or) underground feed approved

Utility Approval Reference

Ring vs.RL	OH/ UH/ O/U	Lugs max kcmil		BPS	Barrel Lock	Description
		Line	Load			
RL	O/U	#6-250 kcmil	#2-1/0 CU 2/0 AL	Horn	no	200A 5J RGLS HRNBPS MTRMAIN OH/UG W/BRKR
RL	O/U	#6-250 kcmil	#1-300 kcmil	Horn	no	150A 5J RGLS HRNBPS MTRMAIN OH/UG W/BRKR
RL	O/U	#6-250 kcmil	#1-300 kcmil	Horn	no	200A 5J RGLS HRNBPS MTRMAIN OH/UG W/BRKR
RL	O/U	#14-2/0	#14-2AWG	None	no	TALON METER MAIN 125A - LG
RL	UG-SW	#6-250 kcmil	See breaker rating	Lever	no	200A 4-TERM HORN BP FOR BRKR
RL	O/U	#14-2/0	#14-2AWG	None	no	TALON MM 150A 4J 1BRKR OH/UG NO BPS RGLS
RL	O/U	#6-250kcmil	#6-250kcmil	None	no	TALON MM 200A 4J 1BRKR NO BPS RGLS
RL	O/U	#6-250kcmil	#6-250kcmil	None	no	TALON UAB4 RESIDENTIAL ST 200A TROUGH
RL	UG	#6-250	#6-250	None	no	TALON 100A 4/6 MTRPED RGLS W/BRKR
RL	UG	#6-250	#6-250	None	no	TALON 100A 4/6 2POS MTRPED RGLS W/BRKR
RL	UG	(2) #6-350 kcmil	#8-250 kcmil	Lever	no	TALON 125A 4/6 MTRPED RGLS W/BRKR
RL	UG	(2) #6-350 kcmil	#8-250 kcmil	None	no	TALON 125A 4/6 2POS MTRPED RGLS W/BRKR
RL	UG	(2) #6-350 kcmil	#8-250 kcmil	None	no	TALON 150A 4/6 MTRPED RGLS W/BRKR
RL	UG	(2) #6-350 kcmil	#8-250 kcmil	None	no	TALON 150A 4/6 2POS MTRPED RGLS W/BRKR
RL	UG	1/0-350kcmil	1/0-350kcmil	None	no	TALON 200A 4/6 MTRPED RGLS W/BRKR
RL	UG	1/0-350kcmil	1/0-350kcmil	None	no	TALON 200A 4SP/6CIR METER PED 2 POS
RL	UG	(2) #6-350 kcmil	#8-250 kcmil	Horn	yes	200A 5J RGLS 1POS HRNBPS MTRPED UG
RL	UG	(2) #6-350 kcmil	#8-250 kcmil	Horn	yes	200A 5J RGLS 2POS HRNBPS MTRPED UG
RL	UG	1/0-350kcmil	1/0-350kcmil	None	no	TALON 200A 4/6 MTRPED RGLS
RL	UG	1/0-350kcmil	1/0-350kcmil	None	no	TALON 200A 4SP/6CIR METER PED 2 POS
RL	UG	#6-250	#6-250	None	no	TALON 100A 4S/6C MTRPED SERIES RGLS
RL	UG	#6-250	#6-250	None	no	TALON 100A 4/6 2POS MTRPED SERIES RGLS
RL	UG	(2) #6-350 kcmil	#8-250 kcmil	None	no	TALON 125A 4S/6C MTRPED SERIES RGLS
RL	UG	(2) #6-350 kcmil	#8-250 kcmil	None	no	TALON 125A 4/6 2POS MTRPED SERIES RGLS
RL	UG	(2) #6-350 kcmil	#8-250 kcmil	None	no	TALON 150A 4S/6C MTRPED SERIES RGLS
RL	UG	(2) #6-350 kcmil	#8-250 kcmil	None	no	TALON 150A 4/6 2POS MTRPED SERIES RGLS
RL	UG	1/0-350kcmil	1/0-350kcmil	None	no	TALON 200A 4/6 MTRPED SERIES RGLS
RL	UG	1/0-350kcmil	1/0-350kcmil	None	no	TALON 200A 4/6 2POS MTRPED SERIES RGLS
RL	OH	#6-350 kcmil	#14-2/0	None	no	TEMP POWER RINGLESS TOP FEED METERED
RL	UG	#6-350 kcmil	#14-2/0	None	no	TALON SUR COM MTR
RL	UG	#6-350 kcmil	#14-2/0	None	no	TALON POP PM PED
RL	UG	#6-350 kcmil	#6-350 kcmil	None	no	TALON POP DB PED
RL	O/U	(3) #2-500kcmil	(3) #2-500kcmil	None	no	TALON 1000A 5J 200A/6POS RGLS PAK NO BPS
RL	O/U	(3) #2-500kcmil	(3) #2-500kcmil	Horn	no	1000A 5J 200A/6POS RGLS PAK HRNBPS

Utility Approval Reference

Talon Catalog Number	Page	Amps	Term.	5th Term.	Pos.	Utility Approvals						Milbank Reference	Cross	Talon Catalog Number
						AEP	Duke/Cinergy	DE	DPLC	FEC	HE			
WTG2211RJB	26	200	5	9:00	2	O/U						U5902-X-KK-BLG		WTG2211RJB
WTG3311RJB	26	300	5	9:00	3	O/U						U5903-X-KK-BLG		WTG3311RJB
WTG4212RJB	26	400	5	9:00	2	O/U						U5882-X-KK-BLG		WTG4212RJB
WTG4312RJB	26	400	5	9:00	3	O/U						U5883-X-KK-BLG		WTG4312RJB
WTG4411RJB	26	400	5	9:00	4	O/U						U5904-X-KK-BLG		WTG4411RJB
WTG4412RJB	26	400	5	9:00	4	O/U						U5884-X-KK-BLG		WTG4412RJB
WTG4511RJB	26	500	5	9:00	5	O/U						U5905-X-KK-BLG		WTG4511RJB
WTG4611RJB	26	600	5	9:00	6	O/U						U5906-X-KK-BLG		WTG4611RJB
WTG4x11RJ	25	125	5	Inst.			O/U					N/A		WTG4x11RJ
WTG4x12RJ	25	225	5	Inst.			O/U					N/A		WTG4x12RJ
WTG5411RJ	25	125	5	Inst.			O/U					N/A		WTG5411RJ
WTG5411RJB	26	500	5	9:00	4	O/U						N/A		WTG5411RJB
WTG6412RJB	26	600	5	9:00	4	O/U						N/A		WTG6412RJB
WTG6511RJB	26	600	5	9:00	5	O/U						N/A		WTG6511RJB
WTG6512RJB	26	600	5	9:00	5	O/U						U5885-X-KK-BLG		WTG6512RJB
WTG6611RJB	26	600	5	9:00	6	O/U						N/A		WTG6611RJB
WTG6612RJB	26	600	5	9:00	6	O/U						U5886-X-KK-BLG		WTG6612RJB
WTG6x11RJ	25	125	5	Inst.			O/U					N/A		WTG6x11RJ
WTG6x12RJ	25	225	5	Inst.			O/U					N/A		WTG6x12RJ
WTG8612RJ	25	225	5	Inst.			O/U					N/A		WTG8612RJ
WTG8612RJB	26	800	5	9:00	6	O/U						N/A		WTG8612RJB
WTGL10612RJ	27	1000	5	9:00	6	O/U	O/U					N/A		WTGL10612RJ
WTGL4212RJ	27	400	5	9:00	2	O/U						N/A		WTGL4212RJ
WTGL4312RJ	27	400	5	9:00	3	O/U						N/A		WTGL4312RJ
WTGL4412RJ	27	400	5	9:00	4	O/U						N/A		WTGL4412RJ
WTGL4x12RJ	27	225	5	Inst.			O/U					N/A		WTGL4x12RJ
WTGL6412RJ	27	600	5	9:00	4	O/U						N/A		WTGL6412RJ
WTGL6512RJ	27	600	5	9:00	5	O/U						N/A		WTGL6512RJ
WTGL6612RJ	27	600	5	9:00	6	O/U						N/A		WTGL6612RJ
WTGL6x12RJ	27	225	5	Inst.			O/U					N/A		WTGL6x12RJ
WTGL8612RJ	27	800	5	9:00	6	O/U	O/U					N/A		WTGL8612RJ
WTGxx11RJ	27	125	5	Inst.			O/U					N/A		WTGxx11RJ

Key

OH = Overhead feed only
 UG = Underground feed only
 O/U = Overhead (or) underground feed approved

Utility Approval Reference

Ring vs.RL	OH/ UH/ O/U	Lugs max kcmil		BPS	Barrel Lock	Description
		Line	Load			
RL	O/U	#4-300kcmil	#4-300kcmil	Horn	no	200A 5J 125A/2POS RGLS PAK HRNBPS
RL	O/U	#2-600kcmil	#2-600kcmil	Horn	no	300A 5J 125A/3POS RGLS PAK HRNBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Horn	no	400A 5J 200A/2POS RGLS PAK HRNBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Horn	no	400A 5J 200A/3POS RGLS PAK HRNBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Horn	no	400A 5J 125A/4POS RGLS PAK HRNBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Horn	no	400A 5J 200A/4POS RGLS PAK HRNBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Horn	no	400A 5J 125A/5POS RGLS PAK HRNBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Horn	no	400A 5J 125A/6POS RGLS PAK HRNBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	None	no	TALON 400A 5J 125A/XPOS RGLS PAK NO BPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	None	no	TALON 400A 5J 200A/XPOS RGLS PAK NO BPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	None	no	TALON 400A 5J 125A/XPOS RGLS PAK NO BPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Horn	no	500A 5J 125A/4POS RGLS PAK HRNBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Horn	no	600A 5J 200A/4POS RGLS PAK HRNBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Horn	no	600A 5J 125A/5POS RGLS PAK HRNBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Horn	no	600A 5J 200A/5POS RGLS PAK HRNBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Horn	no	600A 5J 125A/6POS RGLS PAK HRNBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Horn	no	600A 5J 200A/6POS RGLS PAK HRNBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	None	no	TALON 400A 5J 125A/XPOS RGLS PAK NO BPS
RL	O/U	(2) #2-600	(2) #2-600	None	no	TALON 600A 5J 200A/XPOS RGLS PAK NO BPS
RL	O/U	(2) 1/0-750kcmil	(2) 1/0-750kcmil	None	no	TALON 800A 5J 200A/6POS RGLS PAK NO BPS
RL	O/U	(2) 1/0-750kcmil	(2) 1/0-750kcmil	Horn	no	800A 5J 200A/6POS RGLS PAK HRNBPS
RL	O/U	(3) #2-500kcmil	(3) #2-500kcmil	Lever	no	1000A 5J 200A/6POS RGLS PAK LVRBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Lever	no	400A 5J 200A/2POS RGLS PAK LVRBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Lever	no	400A 5J 200A/3POS RGLS PAK LVRBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Lever	no	400A 5J 200A/4POS RGLS PAK LVRBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	None	no	TALON 600A 5J 200A/XPOS RGLS PAK NO BPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Lever	no	600A 5J 200A/4POS RGLS PAK LVRBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	Lever	no	600A 5J 200A/5POS RGLS PAK LVRBPS
RL	O/U	(2) 1/0-750kcmil	(2) 1/0-750kcmil	Lever	no	600A 5J 200A/6POS RGLS PAK LVRBPS
RL	O/U	(2) #2-600	(2) #2-600	None	no	TALON 800A 5J 200A/6POS RGLS PAK NO BPS
RL	O/U	(3) #2-500kcmil	(3) #2-500kcmil	Lever	no	800A 5J 200A/6POS RGLS PAK LVRBPS
RL	O/U	1/0-750kcmil	1/0-750kcmil	None	no	TALON 400A 5J 125A/XPOS RGLS PAK NO BPS

Represented by:

Impact Agency
3501 Croton Avenue
Cleveland, Ohio 44115
Phone: (216) 361-0676



Talon Meter Mounting Devices
5400 Triangle Parkway
Norcross, GA 30092

Subject to change without prior notice
Order No.: RPSA-LG014-1016
All rights reserved
Printed in USA
© 2016 Siemens Industry, Inc.

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.