


SIMATIC S7-1500, Fail-safe Software controller CPU 1508S F Single license f. 1 install., R-SW, SW and documentation on DVD, license key on USB stick, R-SW Class A, 6 languages (de,en,it,fr,es,zh), executable under Windows 7/10, Reference HW: IPC4x7E IPC627D, IPC827D, IPC677D

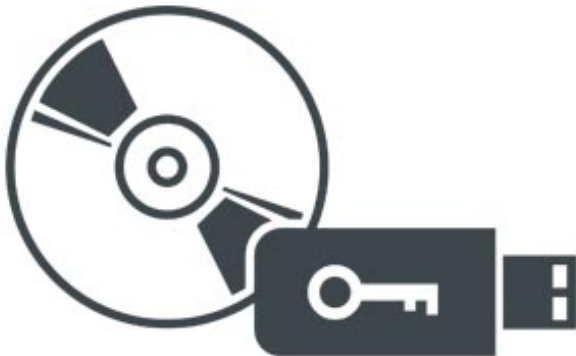

General information	
Product type designation	CPU 1508S F
Software version	V20.8
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/integrated as of version	V16
Configuration control	
via dataset	Yes
Memory	
SIMATIC memory card required	No; Use of the PC mass storage
Work memory	
• integrated (for program)	12.5 Mbyte
• integrated (for data)	100 Mbyte
• integrated (for CPU function library of CPU Runtime)	50 Mbyte
Load memory	

<ul style="list-style-type: none"> <li>integrated (on PC mass storage)</li> </ul>	1 024 Mbyte
<b>Backup</b>	
<ul style="list-style-type: none"> <li>with UPS</li> </ul>	Yes; all memory areas declared retentive
<ul style="list-style-type: none"> <li>with non-volatile memory</li> </ul>	Yes; Depending on PC hardware
<b>CPU processing times</b>	
for bit operations, typ.	1 ns; On IPC427E, Intel Xeon processor
for word operations, typ.	2 ns; On IPC427E, Intel Xeon processor
for fixed point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor
for floating point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor
<b>CPU-blocks</b>	
Number of elements (total)	6 000; In addition to blocks such as DBs, FBs and FCs, UDTs, global constants, etc. are also regarded as elements
<b>DB</b>	
<ul style="list-style-type: none"> <li>Number, max.</li> </ul>	5 999; Number range: 1 to 65535
<ul style="list-style-type: none"> <li>Size, max.</li> </ul>	16 Mbyte
<b>FB</b>	
<ul style="list-style-type: none"> <li>Number, max.</li> </ul>	5 998; Number range: 1 to 65535
<ul style="list-style-type: none"> <li>Size, max.</li> </ul>	1 024 kbyte
<b>FC</b>	
<ul style="list-style-type: none"> <li>Number, max.</li> </ul>	5 999; Number range: 1 to 65535
<ul style="list-style-type: none"> <li>Size, max.</li> </ul>	1 024 kbyte
<b>OB</b>	
<ul style="list-style-type: none"> <li>Size, max.</li> </ul>	1 024 kbyte
<ul style="list-style-type: none"> <li>Number of free cycle OBs</li> </ul>	100
<ul style="list-style-type: none"> <li>Number of time alarm OBs</li> </ul>	20
<ul style="list-style-type: none"> <li>Number of delay alarm OBs</li> </ul>	20
<ul style="list-style-type: none"> <li>Number of cyclic interrupt OBs</li> </ul>	20
<ul style="list-style-type: none"> <li>Number of process alarm OBs</li> </ul>	50
<ul style="list-style-type: none"> <li>Number of DPV1 alarm OBs</li> </ul>	3
<ul style="list-style-type: none"> <li>Number of isochronous mode OBs</li> </ul>	1
<ul style="list-style-type: none"> <li>Number of technology synchronous alarm OBs</li> </ul>	2
<ul style="list-style-type: none"> <li>Number of startup OBs</li> </ul>	100
<ul style="list-style-type: none"> <li>Number of asynchronous error OBs</li> </ul>	4
<ul style="list-style-type: none"> <li>Number of synchronous error OBs</li> </ul>	2
<ul style="list-style-type: none"> <li>Number of diagnostic alarm OBs</li> </ul>	1
<b>Nesting depth</b>	
<ul style="list-style-type: none"> <li>per priority class</li> </ul>	24; Up to 8 possible for F-blocks
<b>Counters, timers and their retentivity</b>	
<b>S7 counter</b>	
<ul style="list-style-type: none"> <li>Number</li> </ul>	2 048
<b>Retentivity</b>	

— adjustable	Yes
<b>IEC counter</b>	
• Number	Any (only limited by the main memory)
<b>Retentivity</b>	
— adjustable	Yes
<b>S7 times</b>	
• Number	2 048
<b>Retentivity</b>	
— adjustable	Yes
<b>IEC timer</b>	
• Number	Any (only limited by the main memory)
<b>Retentivity</b>	
— adjustable	Yes
<b>Data areas and their retentivity</b>	
Retentive data area (incl. timers, counters, flags), max.	135 kbyte; On SIMATIC IPC427D, IPC477D and IPC427E, IPC477E; 35 KB on SIMATIC IPC627D, IPC677D and IPC827D
Extended retentive data area (incl. timers, counters, flags), max.	100 Mbyte; When using PC mass storage for retentive data
<b>Flag</b>	
• Number, max.	16 kbyte
• Number of clock memories	8; in 1 memory byte
<b>Data blocks</b>	
• Retentivity adjustable	Yes
• Retentivity preset	No
<b>Local data</b>	
• per priority class, max.	64 kbyte; max. 16 KB per block
<b>Address area</b>	
Number of IO modules	8 192
<b>I/O address area</b>	
• Inputs	32 kbyte
• Outputs	32 kbyte
<b>Subprocess images</b>	
• Number of subprocess images, max.	32
<b>Hardware configuration</b>	
Number of distributed IO systems	20
<b>Number of DP masters</b>	
• via PC interfaces	1
<b>Number of IO Controllers</b>	
• via PC interfaces	1; any combination of RT or IRT interfaces
<b>Time of day</b>	
<b>Clock</b>	

• Type	Software clock, synchronizable, no battery backup
• Deviation per day, max.	Depending on PC hardware
<b>Operating hours counter</b>	
• Number	16
<b>Clock synchronization</b>	
• supported	Yes
• to DP, master	No
• on Ethernet via NTP	Yes
• on Windows clock, slave	Yes

<b>Interfaces</b>	
Number of interfaces	3
Number of PROFINET interfaces	2; Of which one interface can be used as an IO Controller or I-Device
Number of PROFIBUS interfaces	1

### 1. Interface

Interface type	CP 1625
Number of connections	192

<b>Interface types</b>	
• Number of ports	2
• integrated switch	Yes
• RJ 45 (Ethernet)	Yes
— Transmission rate, max.	100 Mbit/s
— Industrial Ethernet status LED	Yes

<b>Protocols</b>	
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes
• Web server	Yes

<b>PROFINET IO Controller</b>	
<b>Services</b>	
— Isochronous mode	Yes
— Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
— shortest clock pulse	500 µs
— IRT	Yes
— MRP	Yes
— MRPD	Yes
— PROFIenergy	Yes
— Prioritized startup	Yes; Max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)

— Number of connectable IO Devices, max.	256
— Of which IO devices with IRT, max.	64
— Number of connectable IO Devices for RT, max.	256
— of which in line, max.	256
— Number of IO Devices that can be simultaneously activated/deactivated, max.	8
— IO Devices changing during operation (partner ports), supported	Yes; The CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)
— Number of IO Devices per tool, max.	8
— Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data

#### Update time for IRT

— for send cycle of 250 µs	250 µs to 4 ms
— for send cycle of 500 µs	500 µs to 8 ms
— for send cycle of 1 ms	1 ms to 16 ms
— for send cycle of 2 ms	2 ms to 32 ms
— for send cycle of 4 ms	4 ms to 64 ms
— With IRT and parameterization of "odd" send cycles	Update time = set "odd" send clock (any multiple of 125 µs: 375 µs, 625 µs ... 3 875 µs)

#### Update time for RT

— for send cycle of 250 µs	250 µs to 128 ms
— for send cycle of 500 µs	500 µs to 256 ms
— for send cycle of 1 ms	1 ms to 512 ms
— for send cycle of 2 ms	2 ms to 512 ms
— for send cycle of 4 ms	4 ms to 512 ms

#### Address area

— Inputs, max.	16 kbyte
— Outputs, max.	16 kbyte

#### PROFINET IO Device

##### Services

— Isochronous mode	No
— IRT	Yes
— MRP	Yes
— MRPD	Yes
— PROFIenergy	Yes
— Prioritized startup	Yes
— Shared device	Yes
— Number of IO Controllers with shared device, max.	4
— Asset management record	Yes

## 2. Interface

Interface type	Onboard PROFINET / IE interface X2 of the SIMATIC IPC, Intel Springville i210T
Number of connections via this interface	192
<b>Interface types</b>	
• Number of ports	1
• integrated switch	No
• RJ 45 (Ethernet)	Yes
— Transmission rate, max.	100 Mbit/s
<b>Protocols</b>	
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes
• Web server	Yes
• Media redundancy	No
<b>PROFINET IO Controller</b>	
<b>Services</b>	
— Isochronous mode	No
— IRT	No
— MRP	No
— MRPD	No
— PROFINergy	Yes
— Prioritized startup	Yes; Max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
— Number of connectable IO Devices for RT, max.	128
— of which in line, max.	128
— Number of IO Devices that can be simultaneously activated/deactivated, max.	8
— Number of IO Devices per tool, max.	8
— Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
<b>Address area</b>	
— Inputs, max.	8 kbyte
— Outputs, max.	8 kbyte
<b>PROFINET IO Device</b>	
<b>Services</b>	
— Isochronous mode	No
— IRT	No

— MRP	No
— MRPD	No
— PROFIenergy	Yes
— Shared device	Yes
— Number of IO Controllers with shared device, max.	4
— Asset management record	Yes

### 3. Interface

Interface type	PROFIBUS with CP 5622, CP 5622 onboard
Number of connections via this interface	44
<b>Protocols</b>	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	No
• SIMATIC communication	Yes
<b>PROFIBUS DP master</b>	
• Number of DP slaves, max.	64
<b>Services</b>	
— Equidistance	No
— Isochronous mode	No
<b>Address area</b>	
— Inputs, max.	8 kbyte
— Outputs, max.	8 kbyte

### 4. Interface

Interface type	PROFIBUS with CP 5623
Number of connections via this interface	44
<b>Interface types</b>	
• RS 485	Yes
<b>Protocols</b>	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	No
• SIMATIC communication	Yes; no PG/STEP 7 connection possible
<b>PROFIBUS DP master</b>	
• Number of DP slaves, max.	125
<b>Services</b>	
— Equidistance	No
— Isochronous mode	No
<b>Address area</b>	
— Inputs, max.	8 kbyte
— Outputs, max.	8 kbyte

### Protocols

Number of connections

• Number of connections, max.	192
• Number of connections reserved for ES/HMI/web	10
• Number of S7 routing paths	16
<b>Redundancy mode</b>	
<b>Media redundancy</b>	
— Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
— Number of stations in the ring, max.	50
<b>SIMATIC communication</b>	
• PG/OP communication	Yes
• S7 routing	Yes
• S7 communication, as server	Yes
• S7 communication, as client	Yes
• User data per job, max.	64 kbyte; BSEND/BRCV: 64 KB; PUT/GET: 960 bytes
<b>Open IE communication</b>	
• TCP/IP	Yes
— Data length, max.	64 kbyte
• ISO-on-TCP (RFC1006)	Yes
— Data length, max.	64 kbyte
• UDP	Yes
— Data length, max.	2 kbyte
— UDP multicast	Yes
• DHCP	No
• SNMP	Yes
• DCP	Yes
• LLDP	Yes
<b>Web server</b>	
• HTTP	Yes
• HTTPS	Yes
<b>OPC UA</b>	
• Runtime license required	Yes; "Large" license required
• OPC UA client	Yes; Data access (read, write), method call
— Security policies	Yes; Available security policies: None, Basic128Rsa15, Basic256Rsa15, Basic256Sha256
— User authentication	Yes; "anonymous" or by user name & password
— Number of connections, max.	40
— Number of nodes of the client interfaces, max.	5 000
— Number of elements for one call of OPC-UA-NodeGetHandleList/OPC-UA-ReadList/OPC-UA-WriteList, max.	300

— Number of elements for one call of OPC-UA_NameSpaceGetIndexList, max.	20
— Number of elements for one call of OPC-UA_MethodGetHandleList, max.	100
— Number of simultaneous calls of the client instructions per connection (except OPC-UA_ReadList, OPC-UA_WriteList, OPC-UA_MethodCall), max.	1
— Number of simultaneous calls of the client instructions OPC-UA_ReadList, OPC-UA_WriteList and OPC-UA_MethodCall, max.	5
— Number of registerable nodes, max.	5 000
— Number of registerable method calls of OPC-UA_MethodCall, max.	100
— Number of inputs/outputs when calling OPC-UA_MethodCall, max.	20
• OPC UA server	Yes; Data access (read, write, subscribe), method call, custom address space
— Application authentication	Yes
— Security policies	Yes; Available security policies: None, Basic128Rsa15, Basic256Rsa15, Basic256Sha256
— User authentication	Yes; "anonymous" or by user name & password
— Number of sessions, max.	64
— Number of accessible variables, max.	200 000
— Number of registerable nodes, max.	50 000
— Number of subscriptions per session, max.	20
— Sampling interval, min.	10 ms
— Publishing interval, min.	10 ms
— Number of server methods, max.	100
— Number of inputs/outputs per server method, max.	20
— Number of monitored items, max.	10 000; for 1 s sampling interval and 1 s send interval
— Number of server interfaces, max.	10
— Number of nodes for user-defined server interfaces, max.	30 000

**Further protocols**

• MODBUS	Yes; MODBUS TCP
----------	-----------------

**S7 message functions**

Number of login stations for message functions, max.	32
Program alarms	Yes
Number of configurable program messages, max.	10 000
Number of loadable program messages in RUN, max.	5 000

Number of simultaneously active program alarms	1 000
<ul style="list-style-type: none"> <li>• Number of program alarms</li> </ul>	1 000
<ul style="list-style-type: none"> <li>• Number of alarms for system diagnostics</li> </ul>	200
<ul style="list-style-type: none"> <li>• Number of alarms for motion technology objects</li> </ul>	160

### Test commissioning functions

Joint commission (Team Engineering)	Yes; Parallel online access possible for up to 10 engineering systems
Status block	Yes; up to 8 simultaneously
Single step	Yes
Number of breakpoints	8

### Status/control

<ul style="list-style-type: none"> <li>• Status/control variable</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Variables</li> </ul>	Inputs, outputs, memory bits, DB, times, counters
<ul style="list-style-type: none"> <li>• Number of variables, max.</li> </ul>	200
<ul style="list-style-type: none"> <li>— of which status variables, max.</li> </ul>	200
<ul style="list-style-type: none"> <li>— of which control variables, max.</li> </ul>	200

### Forcing

<ul style="list-style-type: none"> <li>• Forcing</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Forcing, variables</li> </ul>	Inputs, outputs
<ul style="list-style-type: none"> <li>• Number of variables, max.</li> </ul>	200

### Diagnostic buffer

<ul style="list-style-type: none"> <li>• present</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Number of entries, max.</li> </ul>	1 000
<ul style="list-style-type: none"> <li>— of which powerfail-proof</li> </ul>	300

### Traces

<ul style="list-style-type: none"> <li>• Number of configurable Traces</li> </ul>	4
<ul style="list-style-type: none"> <li>• Memory size per trace, max.</li> </ul>	512 kbyte

### Interrupts/diagnostics/status information

<ul style="list-style-type: none"> <li>• RUN/STOP LED</li> </ul>	Yes; HW LED of SIMATIC IPC427D/E and IPC627D
<ul style="list-style-type: none"> <li>• ERROR LED</li> </ul>	Yes; HW LED of SIMATIC IPC427D/E and IPC627D
<ul style="list-style-type: none"> <li>• MAINT LED</li> </ul>	Yes; HW LED of SIMATIC IPC427D/E and IPC627D

### Supported technology objects

Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
<ul style="list-style-type: none"> <li>• PID_Compact</li> </ul>	Yes; Universal PID controller with integrated optimization
<ul style="list-style-type: none"> <li>• PID_3Step</li> </ul>	Yes; PID controller with integrated optimization for valves
<ul style="list-style-type: none"> <li>• PID-Temp</li> </ul>	Yes; PID controller with integrated optimization for temperature

Counting and measuring	
<ul style="list-style-type: none"> <li>• High-speed counter</li> </ul>	Yes
<b>Standards, approvals, certificates</b>	
Highest safety class achievable in safety mode	
<ul style="list-style-type: none"> <li>• Performance level according to ISO 13849-1</li> </ul>	PLe
<ul style="list-style-type: none"> <li>• SIL acc. to IEC 61508</li> </ul>	SIL 3
Probability of failure (for service life of 20 years and repair time of 100 hours)	
— Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05
— High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09
<b>Hardware requirement</b>	
Processor	
<ul style="list-style-type: none"> <li>• Single-core processor</li> </ul>	No
<ul style="list-style-type: none"> <li>• Single-core processor with hyper-threading</li> </ul>	No
<ul style="list-style-type: none"> <li>• Multi-core processor</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Multi-core processor with hyper-threading</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• occupied cores</li> </ul>	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S
Memory	
<ul style="list-style-type: none"> <li>• Work memory, min.</li> </ul>	8 Gbyte
<ul style="list-style-type: none"> <li>• Hard disk memory required for installation</li> </ul>	720 Mbyte
<ul style="list-style-type: none"> <li>• Temporary hard disk memory for installation</li> </ul>	230 Mbyte
<ul style="list-style-type: none"> <li>• Hard disk memory required at runtime</li> </ul>	1 000 Mbyte
<b>Operating systems</b>	
Runs under operating system	
<ul style="list-style-type: none"> <li>• Windows 7</li> </ul>	Yes; Professional, Enterprise, Ultimate (32 bit and 64 bit); Windows Embedded Standard 7 with delivery image of the SIMATIC IPC
<ul style="list-style-type: none"> <li>• Windows 10</li> </ul>	Yes; Windows 10 Enterprise 2016 LTSB, 64 bit, MUI
<b>Configuration</b>	
Programming	
Programming language	
— LAD	Yes; incl. failsafe
— FBD	Yes; incl. failsafe
— STL	Yes
— SCL	Yes
— CFC	No
— GRAPH	Yes
Know-how protection	
<ul style="list-style-type: none"> <li>• User program protection/password protection</li> </ul>	Yes

• Copy protection	Yes
• Block protection	Yes
<b>Access protection</b>	
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes
<b>Cycle time monitoring</b>	
• lower limit	adjustable minimum cycle time
• upper limit	adjustable maximum cycle time
<b>Open Development interfaces</b>	
• Size of ODK SO file, max.	9.8 Mbyte
<b>last modified:</b>	05/09/2020