

ET 200pro EDSE/DSSE HF electronic DOL starter electronic (soft-) switching Full motor protection consisting of: electronic Overload protection + thermistor AC-3, 5.5 kW / 400 V 1.5 A...(9 A)12 A Brake contact 400 V AC 4 DI Han Q4/2 - Han Q8/0



Figure similar

Product brand name	SIMATIC
Product designation	Motor starters
Design of the product	direct starter
Product type designation	ET 200pro

General technical data	
Trip class	Class 5, 10, 20 and 30 adjustable
Product function	
• on-site operation	Yes
Insulation voltage	
• rated value	400 V
Degree of pollution	3
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	400 V
Protection class IP	IP65
Shock resistance	15g / 11 ms
Vibration resistance	2g
Mechanical service life (switching cycles)	

• of the main contacts typical	30 000 000
Type of assignment	1
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	A
Reference code acc. to DIN EN 81346-2	Q
Reference code acc. to DIN EN 61346-2	Q
Product function	
• direct start	Yes
• reverse starting	No
Product component Motor brake output	Yes
Product feature	
• brake control with 230 V AC	No
• brake control with 400 V AC	Yes
• brake control with 24 V DC	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No
Type of voltage of the supply voltage for brake control required	AC
Supply voltage for brake control required	400 V
Product function Short circuit protection	Yes
Design of short-circuit protection	fuse
Maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	100 000 A

Safety related data

B10 value	
• with high demand rate acc. to SN 31920	1 000 000
Proportion of dangerous failures	
• with low demand rate acc. to SN 31920	50 %
• with high demand rate acc. to SN 31920	75 %
Failure rate [FIT]	
• with low demand rate acc. to SN 31920	100 FIT
T1 value for proof test interval or service life acc. to IEC 61508	20 y
Protection against electrical shock	finger-safe

Main circuit

Number of poles for main current circuit	3
Design of the switching contact	solid-state / thyristor / 2 phases
Adjustable pick-up value current of the current-dependent overload release	1.5 ... 12 A
Type of the motor protection	full motor protection
Type of voltage	AC
Operating voltage	

• rated value	200 ... 400 V
Operating range relative to the operating voltage at AC	
• at 50 Hz	200 ... 440 V
Operating current	
• at AC at 400 V rated value	12 A
• at AC-3	
— at 400 V rated value	12 A
Operating power	
• at AC-3	
— at 400 V rated value	5 500 W
Operating power for three-phase motors at 400 V at 50 Hz	700 ... 5 500 W

Inputs/ Outputs

Product function	
• digital inputs parameterizable	Yes
• digital outputs parameterizable	No
Number of digital inputs	4
Number of sockets	
• for digital output signals	0
• for digital input signals	4

Supply voltage

Type of voltage of the supply voltage	DC
Supply voltage 1 at DC	24 ... 24 V
Supply voltage 1 at DC rated value	
• minimum permissible	20.4 V
• maximum permissible	28.8 V

Control circuit/ Control

Type of voltage of the control supply voltage	DC
Control supply voltage at DC	
• rated value	20.4 ... 28.8 V
Control supply voltage 1	
• at DC rated value	20.4 ... 28.8 V
• at DC	24 ... 24 V
Power loss [W] in auxiliary and control circuit	
• in switching state OFF	
— with bypass circuit	1.656 W
— without bypass circuit	1.656 W
• in switching state ON	
— with bypass circuit	5.4 W
— without bypass circuit	1.944 W

Installation/ mounting/ dimensions	
Mounting position	vertical, horizontal
Mounting type	screw fixing
Height	230 mm
Width	110 mm
Depth	160 mm

Ambient conditions	
Installation altitude at height above sea level	
<ul style="list-style-type: none"> • maximum 	3 500 m
Ambient temperature	
<ul style="list-style-type: none"> • during operation 	-25 ... +55 °C
<ul style="list-style-type: none"> • during storage 	-40 ... +70 °C
<ul style="list-style-type: none"> • during transport 	-40 ... +70 °C
Relative humidity during operation	5 ... 95 %

Communication/ Protocol	
Protocol is supported	
<ul style="list-style-type: none"> • PROFIBUS DP protocol 	Yes
<ul style="list-style-type: none"> • PROFINET protocol 	Yes
Design of the interface	
<ul style="list-style-type: none"> • PROFINET protocol 	Yes
Product function Bus communication	Yes
Protocol is supported	
<ul style="list-style-type: none"> • AS-Interface protocol 	No
Product function	
<ul style="list-style-type: none"> • supports PROFIenergy measured values 	Yes
<ul style="list-style-type: none"> • supports PROFIenergy shutdown 	Yes
address range memory of address range	
<ul style="list-style-type: none"> • of the inputs 	2 byte
<ul style="list-style-type: none"> • of the outputs 	2 byte
Type of electrical connection	
<ul style="list-style-type: none"> • of the communication interface 	via backplane bus

Connections/ Terminals	
Type of electrical connection	
<ul style="list-style-type: none"> • for main current circuit 	tab terminals
Type of electrical connection	
<ul style="list-style-type: none"> • 1 for digital input signals 	M12 socket
<ul style="list-style-type: none"> • 2 for digital input signals 	M12 socket
<ul style="list-style-type: none"> • 3 for digital input signals 	M12 socket
<ul style="list-style-type: none"> • 4 for digital input signals 	M12 socket
Type of electrical connection	
<ul style="list-style-type: none"> • at the manufacturer-specific device interface 	optical interface

- for main energy infeed
- for load-side outgoing feeder
- for main energy transmission
- for supply voltage line-side
- for supply voltage transmission

socket according to ISO23570
 socket according to ISO23570
 socket according to ISO23570
 via backplane bus
 via backplane bus

UL/CSA ratings

Operating voltage

- at AC at 60 Hz acc. to CSA and UL rated value 480 V

Certificates/ approvals

General Product Approval		EMC	Declaration of Conformity
 CCC	 CSA	 UL	 EAC
		 RCM	 EG-Konf.

Declaration of Conformity	Test Certificates	other
Miscellaneous	Type Test Certificates/Test Report	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-5LS70-2AA3>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1304-5LS70-2AA3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-5LS70-2AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1304-5LS70-2AA3&lang=en

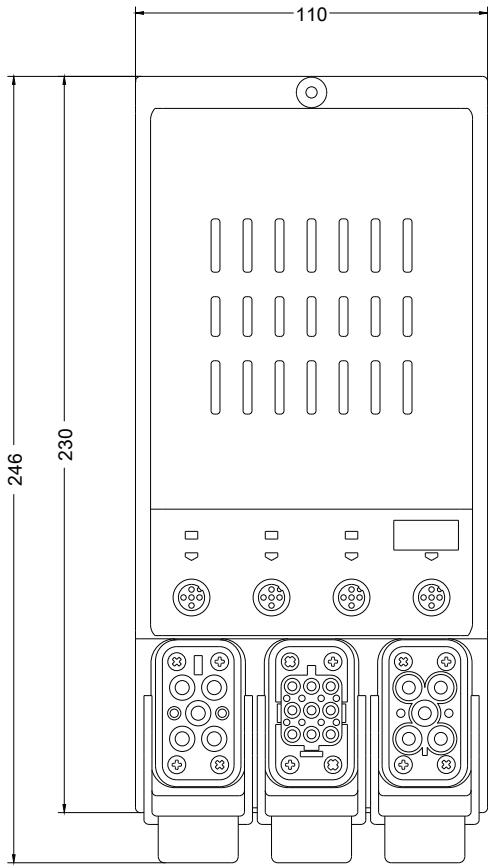

last modified:

11/15/2019

