


NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
- 4) MATES WITH: MINI CHANGE ALT-KEY, 4 POLE RECEPTACLE
- 5) ELECTRICAL DATA:  
 14AWG UL TYPE: TC-ER STRANDED CABLE  
 POLES: 4  
 MAX VOLTAGE: 600V  
 MAX CURRENT: 15A  
 PROTECTION IP67  
 TEMPERATURE RANGE: -20°C TO 90°C
- 6) PACKAGING:  
 CABLE ASSEMBLIES ARE BAGGED SEPERATLY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO OUTSIDE OF BAG.
- 7) ASSEMBLY IS RoHS COMPLIANT
- 8) AGENCY CERTIFICATIONS:  
 UL 2237 LISTED, E258922

S1	BLACK #1	P1
1	BLACK #2	1
2	BLACK #3	2
3	GREEN/YELLOW OR GREEN	3
4		4

WIRING DIAGRAM

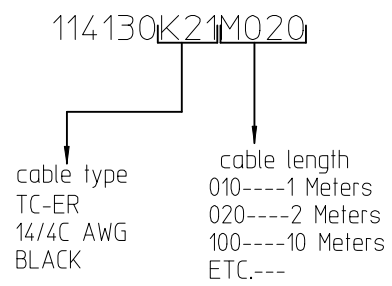

WARNING LABEL	MYLAR	N/A
LABEL	MYLAR	BLACK/YELLOW
FEMALE INSERT	PVC	BLACK
FEMALE COUPLING NUT	ZINC ALLOY	BLACK E-COATED
SOCKET CONTACT	CU ALLOY	GOLD PLATE
OVERMOLD	PVC	BLACK
MALE INSERT	PVC	BLACK
MALE COUPLING NUT	ZINC ALLOY	BLACK E-COATED
PIN CONTACT	CU ALLOY	GOLD PLATE
CABLE	TPE	BLACK
14AWG-TC-ER		
DESCRIPTION	MATERIAL	FINISH

REVISED TEXT	DESCRIPTION
EC NO: IPG2015-1959	2015/05/13
DRWNGGUSTAFSON	2015/06/30
CHKD:BARDEN	2015/09/18
APPR:BWODMAN	
REV	

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)
▽=0	
▽=0	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	SCALE	DESIGN UNITS
IN/MM	15:1	INCH
DRAWN BY	DATE	TITLE
BRUPERT	2011/07/11	MC 4P FEM/MALE STR/STR
CHECKED BY	DATE	4 POLE ALT KEY
TWOLDEGE	2014/08/07	14-4 TC ER BLACK CABLE
APPROVED BY	DATE	
BWOODMAN	2014/09/04	
MATERIAL NO.	DOCUMENT NO.	SHEET NO.
	SD-130062-022	1 OF 1

THIRD ANGLE PROJECTION
MOLEX INCORPORATED
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION