

Through-type terminal thermoplast Screw terminal on both sides
Terminal block 10-pole, beige with label 1...10 61mm, Sz. 2.5

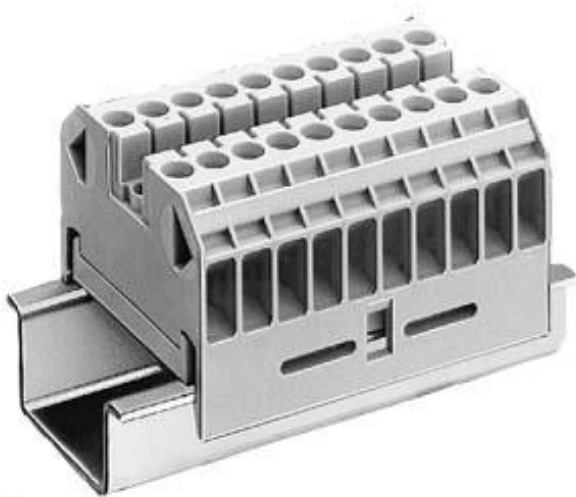


Figure similar

Model	
Product brand name	ALPHA
Product designation	ALPHA FIX terminal blocks
Design of terminal / Terminal levels internally linked	No
General technical data	
Terminal contact spacing	61 mm
Protection class	
Combustibility class acc. to UL 94	V2
Main circuit	
Operating voltage / rated value	800 V
Operating current / rated value	24 A
Appearance	
Color	beige
Product details	
Product component / required / connection plate	No





Number	
Number of terminal levels	1
Number of terminal points / per terminal level	2

Connections	
Connectable conductor cross-section / stranded	
<ul style="list-style-type: none"> • minimum • maximum 	2.5 mm ² 2.5 mm ²
Wire stripping length	11 mm
Connectable conductor cross-section	
<ul style="list-style-type: none"> • solid <ul style="list-style-type: none"> — minimum — maximum • finely stranded <ul style="list-style-type: none"> — with core end processing / minimum — with core end processing / maximum — without core end processing / minimum — without core end processing / maximum 	2.5 mm ² 2.5 mm ² 2.5 mm ² 2.5 mm ² 2.5 mm ² 2.5 mm ²
Tightening torque / with screw-type terminals	
<ul style="list-style-type: none"> • minimum • maximum 	0.5 N·m 0.5 N·m
Type of electrical connection	
<ul style="list-style-type: none"> • 1 • 2 	screw-type terminal screw-type terminal
Position / of the terminal	lateral

Mechanical Design	
Height / with lowest-profile installation	26 mm
Length	41 mm
Mounting type	DIN rail 35 mm
Net weight	71 g
Material / of the insulating body	Thermoplast

Environmental conditions	
Ambient temperature	
<ul style="list-style-type: none"> • during operation / minimum • during operation / maximum • during operation 	-25 °C 55 °C (no derating)

Certificates	
Design tested acc. to type of protection / EEx e	No

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
 CSA	 UR	 EAC	 EG-Konf.
			Miscellaneous
			 BUREAU VERITAS

Shipping Approval	other
-------------------	-------



[Environmental Confirmations](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WA1011-0DF22>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WA1011-0DF22>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-0DF22

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>