

Project:

Type:

Prepared By:

Date:



Features and Benefits

- BALLAST COMPATIBLE - Uses existing ballast
- INSTANT ON - No warm-up time required
- HIGH EFFICACY- Provides same output as fluorescent, but uses far less energy
- 50,000-HOUR LIFESPAN - Lasts 2-3X longer than conventional lamps
- MERCURY FREE - Environmentally friendly vs fluorescent technologies
- ENCLOSED FIXTURE RATED - May be used in both enclosed and open fixtures

Technical Specifications

Product Type	Compact
Bulb Shape	PLT-V
Finish	Frosted
Wattage	16WW
Wattage Equivalency	42WW Fluorescent
Typical Lumen Output	1750
Efficacy	110 lm/W
Color Temperature	3500K Neutral White
CRI	82
Base Type	GX24q
L70 Lifespan	50,000 hours
Operating Temperature	-20°C - 45°C
Dimmable	No
Beam Angle	100°
Warranty	5-Year, No-Compromise Warranty
Installation Type	Type A, Plug and Play
Installation Orientation	Vertical
For Use in Emergency Fixtures	No
For Use Outdoors in Open Fixtures	No

Electrical Characteristics

Input Voltage	Ballast Dependent
Power Factor	Ballast Dependent
Operating Frequency	Ballast Dependent
Input Current @ 120V	Ballast Dependent
Input Current @ 277V	Ballast Dependent


Listings

UL Listed	Yes
DLC Listed	This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.
DLC Model Number	T10097
DLC Product Code	P8GIQ8BS
CEC Status	Lawful for sale in California

Case and Pallet Dimensions

	QTY	LENGTH	WIDTH	HEIGHT
CASE	20	20.5	13.8	8.7
PALLET	600	44.1	41.3	41.7

Dimension

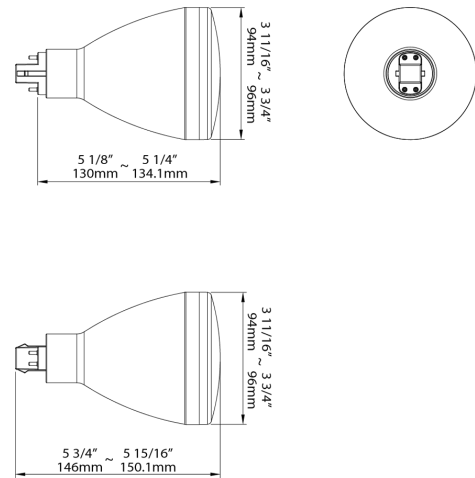

Light Distribution

