


Contactor, Size 4, 2-pole, DC-3 and 5, 75 A at 750 V Auxiliary contacts 21 (2NO + 1NC) 36 V DC DC operation with varistor and series resistor Operating range 0.7 to 1.25 x US

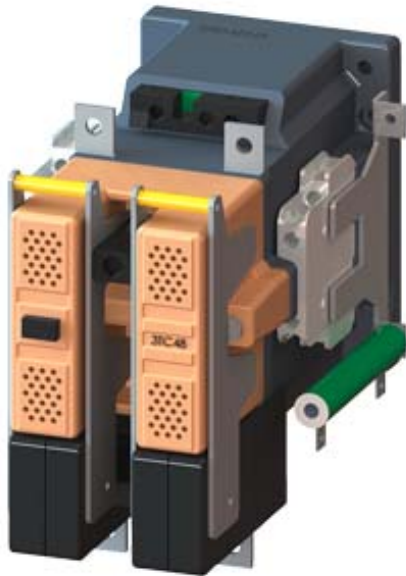

Product designation	Contactor
Product type designation	3TC
General technical data	
Size of contactor	4
Product extension	
• function module for communication	No
• Auxiliary switch	No
Insulation voltage rated value	800 V
maximum permissible voltage for safe isolation between coil and main contacts acc. to EN 60947-1	300 V
Protection class IP	IP00
• on the front	IP00
• of the terminal	IP00
Shock resistance at rectangular impulse	
• at DC	10g / 5 ms, 5g / 10 ms
Mechanical service life (switching cycles)	
• of contactor typical	10 000 000
• of the contactor with added auxiliary switch block typical	10 000 000

Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K
Reference code acc. to DIN EN 81346-2	Q
Reference code acc. to DIN EN 61346-2	Q
Main circuit	
Number of poles	2
Number of poles for main current circuit	2
Number of NO contacts for main contacts	2
Number of NC contacts for main contacts	0
Type of voltage	DC
Operating current	
<ul style="list-style-type: none"> • with 2 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value 	75 A 75 A 75 A 75 A 75 A
Operating current	
<ul style="list-style-type: none"> • at DC-3 at DC-5 <ul style="list-style-type: none"> — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 750 V rated value • with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value 	75 A 75 A 75 A 75 A 75 A 75 A 75 A 75 A
Operating power	
<ul style="list-style-type: none"> • at DC-1 <ul style="list-style-type: none"> — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 750 V rated value • at DC-3 at DC-5 <ul style="list-style-type: none"> — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value — at 750 V rated value 	8.2 kW 16.5 kW 33 kW 56 kW 6.5 kW 13 kW 27 kW 38 kW 45 kW
Operating frequency	

- at DC-1 maximum 1 000 1/h
- at DC-3 maximum 600 1/h
- at DC-5 maximum 600 1/h

Control circuit/ Control

Type of voltage of the control supply voltage	DC
Control supply voltage at DC	
• rated value	36 V
Design of the surge suppressor	with varistor
Closing power of magnet coil at DC	19 W
Holding power of magnet coil at DC	19 W
Closing delay at DC	90 ... 380 ms
Opening delay at DC	17 ... 28 ms
Arcing time	20 ... 30 ms

Auxiliary circuit

Number of NC contacts for auxiliary contacts	1
• instantaneous contact	1
Number of NO contacts for auxiliary contacts	2
• instantaneous contact	2
Number of CO contacts	
• for auxiliary contacts	0
Identification number and letter for switching elements	21
Operating current at AC-12 maximum	10 A
Operating current at AC-15	
• at 230 V rated value	5.6 A
• at 400 V rated value	3.6 A
• at 500 V rated value	2.5 A
Operating current at DC-12	
• at 24 V rated value	10 A
• at 48 V rated value	10 A
• at 60 V rated value	10 A
• at 110 V rated value	3.2 A
• at 125 V rated value	2.5 A
• at 220 V rated value	0.9 A
• at 600 V rated value	0.22 A
Operating current at DC-13	
• at 24 V rated value	10 A
• at 48 V rated value	5 A
• at 60 V rated value	5 A
• at 110 V rated value	1.14 A
• at 125 V rated value	0.98 A

<ul style="list-style-type: none"> • at 220 V rated value • at 600 V rated value 	<p>0.48 A</p> <p>0.07 A</p>
Contact reliability of auxiliary contacts	one incorrect switching operation of 100 million switching operations (17 V, 5 mA)

UL/CSA ratings

Contact rating of auxiliary contacts according to UL	A600 / P600
-------------------------------------------------------------	-------------

Short-circuit protection

Design of the fuse link	
<ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required 	<p>gG: 160 A (690 V, 100 kA)</p> <p>gG: 63 A (690 V, 100 kA)</p> <p>gG: 16 A (500 V, 1 kA)</p>

Installation/ mounting/ dimensions

Mounting position	+/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface
Mounting type	screw fixing
<ul style="list-style-type: none"> • Side-by-side mounting 	Yes
Height	177.5 mm
Width	143 mm
Depth	184 mm
Required spacing	
<ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — Backwards — upwards — downwards — at the side • for grounded parts <ul style="list-style-type: none"> — forwards — Backwards — upwards — at the side — downwards • for live parts <ul style="list-style-type: none"> — forwards — Backwards — upwards — downwards — at the side 	<p>20 mm</p> <p>0 mm</p> <p>10 mm</p> <p>10 mm</p> <p>10 mm</p> <p>55 mm</p> <p>0 mm</p> <p>10 mm</p> <p>10 mm</p> <p>10 mm</p> <p>55 mm</p> <p>0 mm</p> <p>10 mm</p> <p>10 mm</p> <p>10 mm</p>

Connections/ Terminals


Type of electrical connection	screw-type terminals
<ul style="list-style-type: none"> • for main current circuit • for auxiliary and control current circuit 	screw-type terminals
Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • for auxiliary contacts 	
<ul style="list-style-type: none"> — single or multi-stranded 	2x (1 ... 2,5 mm ²)
<ul style="list-style-type: none"> — finely stranded with core end processing 	2x (0,75 ... 2,5 mm ²)

Safety related data

Protection against electrical shock	finger-safe only with terminal cover
--------------------------------------------	--------------------------------------



Certificates/ approvals


General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity
 CCC	 CSA	 UR
 EAC	Type Examination Certificate	 EG-Konf.

Declaration of Conformity	Test Certificates	Marine / Ship-ping	other
Miscellaneous	Special Test Certificate	 RMRS	Confirmation
	Miscellaneous	Type Test Certificates/Test Report	

Further information

- Information- and Downloadcenter (Catalogs, Brochures,...)**
<https://www.siemens.com/ic10>
- Industry Mall (Online ordering system)**
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TC4817-0LV4>
- Cax online generator**
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TC4817-0LV4>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<https://support.industry.siemens.com/cs/ww/en/ps/3TC4817-0LV4>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TC4817-0LV4&lang=en
- Characteristic: Tripping characteristics, I^t, Let-through current**
<https://support.industry.siemens.com/cs/ww/en/ps/3TC4817-0LV4/char>
- Further characteristics (e.g. electrical endurance, switching frequency)**
<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TC4817-0LV4&objecttype=14&gridview=view1>

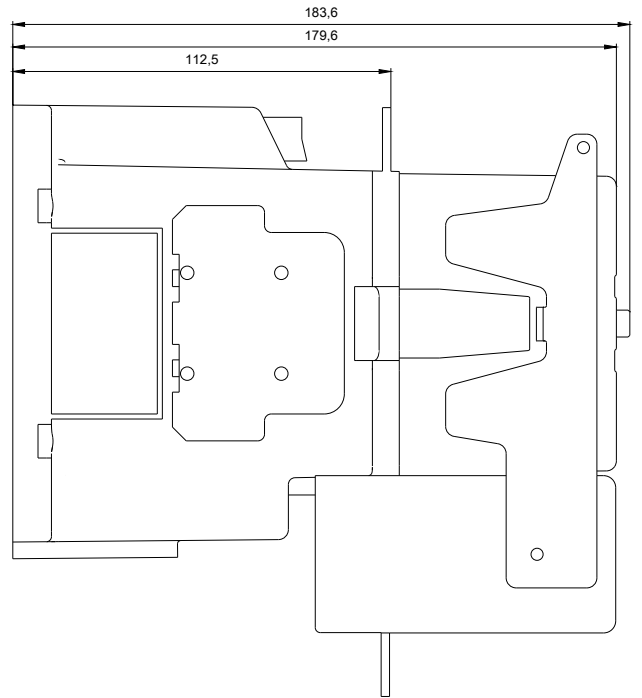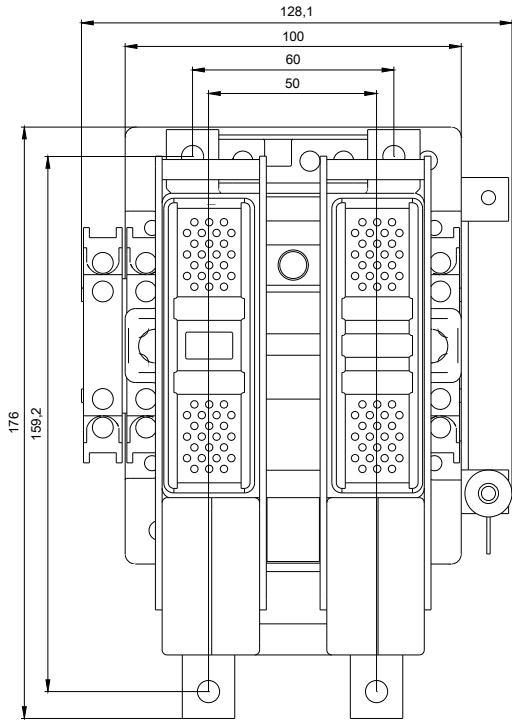

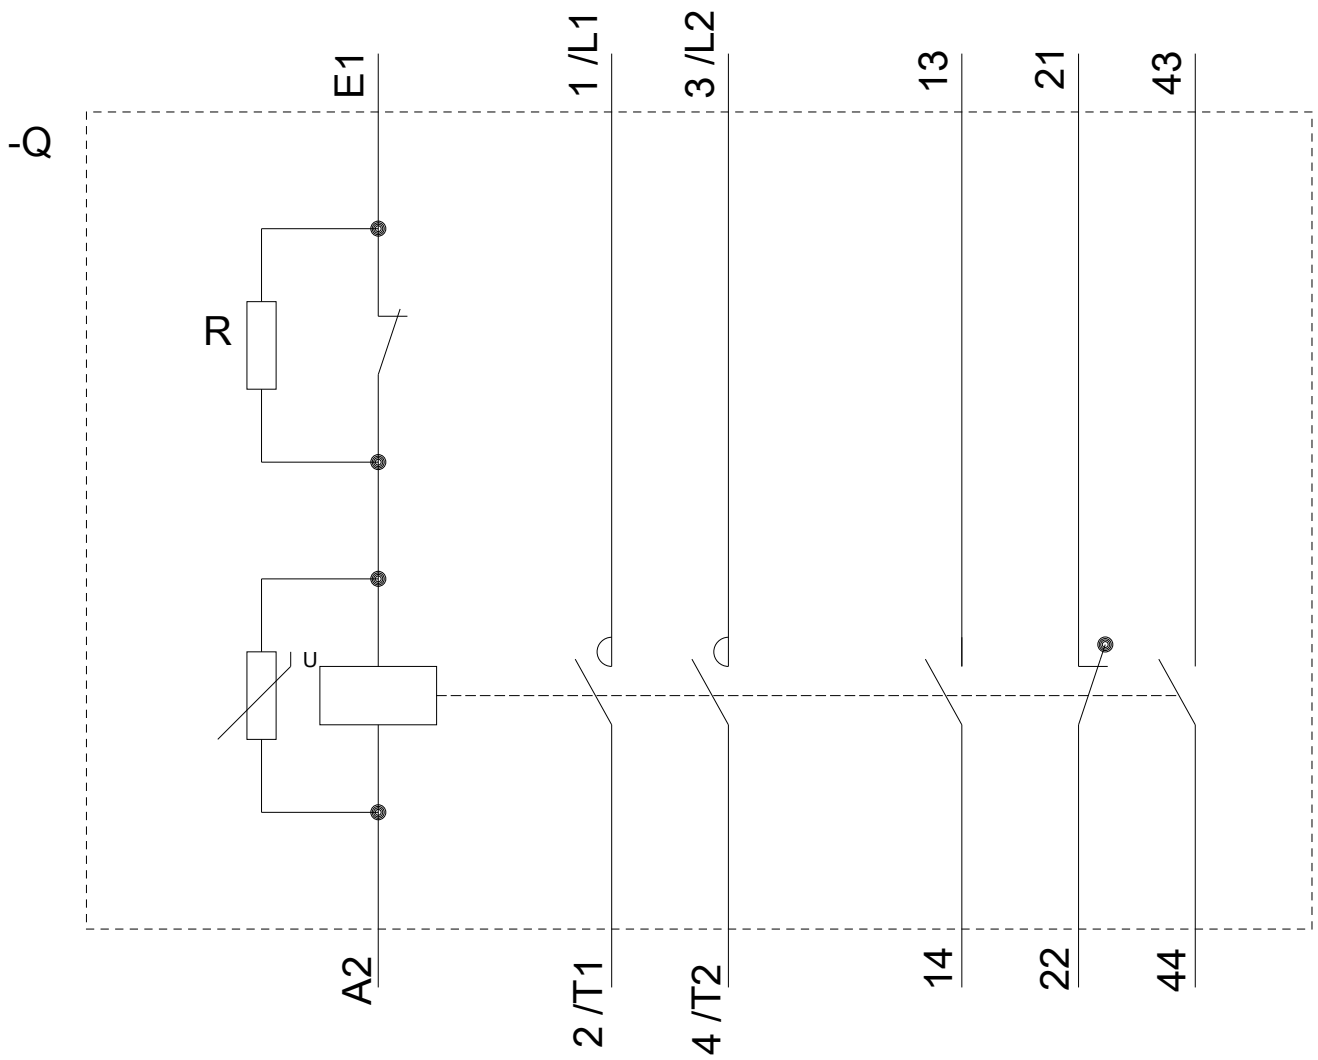

last modified:

03/12/2020