

Scan to connect
online to the
most up-to-
date version of
this Section of
SPEEDFAX.



contents

Siemens Residential and Commercial Surge Protective Devices

Family SPDs	10-2
SOLID Protection	10-4
BoltShield™ Surge Protective Devices	10-5 – 10-7
First Surge	10-8 – 10-9
TPS3 01 and TPS3 L1 (10 Mode)	10-10
TPS4 01 and TPS4 L1 (10 Mode)	10-11
TPS3 02 and TPS3 L2 (10 Mode)	10-12
TPS3 03	10-13
TPS4 03	10-14
TPS3 03 DC	10-15
TPS3 05 and TPS3 L5 (10 Mode)	10-16
TPS4 05 and TPS4 L5 (10 Mode)	10-17
TPS3 06 and TPS3 L6 (10 Mode)	10-18
TPS4 06 and TPS4 L6 (10 Mode)	10-19
TPS3 09	10-20
TPS4 09	10-21
TPS3 11	10-22
TPS4 11	10-23
TPS3 12 and TPS3 L12 (10 mode)	10-24
TPS4 12 and TPS4 L12 (10 mode)	10-25
TPS4 13	10-26
TPS3 15 and TPS3 L15 (10 mode)	10-27
TPS4 15 and TPS4 L15 (10 mode)	10-28
Frequently Asked Questions	10-29

SPD - Surge Protective Devices

Siemens Surge Protection Innovations

Introduction

In today's electronic world, home and business electrical systems just aren't complete unless they incorporate surge protection. **Stopping Surges Before They Get Into** these systems is best accomplished through the installation of appropriately sized hard-wired surge protective devices (SPDs) beginning at the incoming service followed by installations at other key surge entry points.

When Siemens first developed the Transient Protection System (TPS) family of surge protectors, we knew early on that hard-wired surge protectors needed fully coordinated safety controls. This led to the adoption of a number of SPD industry safety control firsts including the patented Ceramgard and

TranSafe circuitry, coordinated fusing and thermal cutouts, dielectric isolation, mechanical re-enforcing taping, etc... resulting in a design that ensures the highest possible electrical system surge protection and reliability.

Our next generation UL 1449 4th Edition TPS SPDs carry on this same legacy. Every TPS is infused with Siemens engineering safety and performance "know-how." Siemens SPDs have the highest degree of safety while delivering the industry's best performance ratings – some of the lowest Voltage Protection Ratings (VPRs), Type 1 or 2 and 20 kA I-nominal ratings (for most models) with surge current ratings from 50 to 1000 kA.

The BoltShield line of SPDs helps address the changing NEC codes that require surge protection in all dwellings. The Siemens BoltShield family of residential and commercial products allows this to be done easily and at a reasonable cost.

Electrical disturbances will always occur, but they don't have to cause surge protectors to fail in an unsafe manner. Safer surge protection means uncompromised electrical system **protection, safety, and reliability.**

The following pages provide additional technical and ordering information concerning our entire offering of surge protection devices.

Internally Mounted SPDs



Features

- Per Phase Surge Current Capacity ranging from 100 kA to 500 kA
- Industry best VPRs
- $I_n = 20$ kA (most models)
- Across the board UL 96A compliance (most models)
- Ground Reference Monitoring (GRM) diagnostics

External or Wall Mounted SPDs



Features

- Per Phase Surge Current Capacity ranging from 50 kA to 1000 kA
- Industry best VPRs
- $I_n = 20$ kA (most models)
- Across the board UL 96A compliance (most models)
- Ground Reference Monitoring (GRM) diagnostics (excluding TPS3 03 & TPS3 09)

Residential SPDs



Features

- Per Phase Surge Current Capacity of 36, 40, 50, 60, 100 or 140 kA
- Complete Service Protection for
 - Power
 - Telephone
 - Coax
- Ground Reference Monitoring (GRM) diagnostics

SPD - Surge Protective Devices

Siemens Surge Protection Innovations

Surge Protector Per Phase Surge Current Capacities

Internal, External and Wall Mounted Standard Mode												
Per Phase Surge Current	50 kA	100 kA	130 kA	150 kA	200 kA	250 kA	300 kA	400 kA	500 kA	600 kA	800 kA	1000 kA
TPS3 01 		✓		✓	✓	✓	✓					
TPS4 01 		✓		✓	✓	✓	✓	✓	✓			
TPS3 02 		✓		✓	✓	✓	✓					
TPS3 03  TPS3 03 DC 	✓											
TPS4 03 	✓											
TPS3 05 		✓		✓	✓	✓	✓					
TPS4 05 		✓		✓	✓	✓	✓	✓	✓			
TPS3 06 		✓		✓	✓	✓	✓	✓	✓			
TPS4 06 		✓		✓	✓	✓	✓	✓	✓			
TPS3 09 		✓										
TPS4 09 			✓									
TPS3 11 		✓		✓	✓							
TPS4-11 		✓		✓	✓	✓						
TPS3 12 		✓		✓	✓	✓	✓	✓	✓			
TPS4 12 		✓		✓	✓	✓	✓	✓	✓			
TPS4 13 		✓		✓	✓	✓	✓	✓				
TPS3 15 										✓	✓	✓
TPS4 15 										✓	✓	✓

10 Mode SPDs										
	Per Phase Surge Current	100 kA	150 kA	300 kA	450 kA	500 kA	550 kA	600 kA	750 kA	900 kA
TSP3 L1			✓	✓						
TSP4 L1			✓	✓	✓		✓		✓	
TPS3 L2			✓	✓						
TPS3 L5			✓	✓						
TPS4 L5			✓	✓	✓		✓		✓	
TPS3 L6			✓	✓	✓	✓				
TPS4 L6			✓	✓	✓		✓		✓	
TPS3 L12			✓	✓	✓					
TPS4 L12			✓	✓	✓					
TPS3 L15								✓		✓
TPS4 L15								✓		✓

SPD - Surge Protective Devices

Recommending Surge Protection

SOLID Protection

Either at home or in the work place, nearly every electrical load is electronic infused. With today's power quality being the same as it was 50 years ago, equipment is more susceptible to surge damage and/or disruption generated by normal electrical distribution interactions. Places where lightning activity is minimal are now experiencing more electronic failures due to surges

generated by the day to day operations of equipment like washers and dryers, copiers, chillers, etc.

In response to this susceptibility, code authorities have mandated emergency power distribution equipment now must be protected by a listed SPD. The reasoning is based upon anecdotal understating that surge protected systems are more reliable. Supported by

government studies, the most efficient way to protect electrical systems from surges is through the installation of hardwired SPDs at key points throughout the distribution system. These locations can easily be remembered by memorizing the locations of the acronym found within the following phrase, "The best surge protected system is a SOLID one," where each letter of the word SOLID stand for the locations on the electrical system where SPDs should be installed.

The illustration to the right shows "SOLID" locations for a school's electrical system. Under each 'SOLID' location is a Siemens TPS model number with surge current capacities matching those to what are typically specified by consultants across North America.



TPS30620 /
TPS40620
or
TPS31220

Service
Entrance



TPS30515 /
TPS40515
or
TPS31215

Outside loads
like Parking
Lot Lighting
powered
from
distribution
panels



TPS30110 /
TPS40110
or
TPS31110

Lower voltage
distribution
panels
powering
computers
and other
electronics



TPS31110
or
TPS30910

Individual
critical
equipment
like servers



TPS30350
or
Call TPS Group

Data,
telephone,
and coaxial
cables

Surge Arrestor Replacement		Discrete or True 10 Mode Style SPDs	
TPS3 03/TPS4 03 Type 1 SPD with $I_n = 20$ kA	Low-voltage surge and lightning arrestors became obsolete when UL 1449 3rd edition went into effect in 2009. They were replaced with Type 1 SPDs having an I-nominal (I_n) rating equal to 20 kA. Most all Siemens TPSs are rated as Type 1, $I_n=20$ kA SPDs. However, the style and form factor of traditional surge arrestors is best replaced using our TPS3 03/TPS4 03.	MOVs = Parallel MOVs	For mission critical or high profile applications, a growing number of end users prefer the assurance discrete or true 10-mode SPDs provide. When surges traverse the electrical system via phase to phase conductors, standard SPDs indirectly protect via the line to neutral or line to ground modes of protection. Siemens integral or wall mounted "Discrete" or "True" 10-mode SPDs address L-L surges by incorporating directly connected line to line surge protection elements. This style of SPD provides the "Just in Case" assurance mission critical or high profile projects require.

BoltShield™ Surge Protective Devices

BSPD – Commercial Surge Protection for Panel Boards

Catalog Logic

BSPD series for panelboards

Ordering Information

Catalog #	BSPD	-	2	-	A	-	100
Series	BSPD		Poles		Voltage Code		Surge Current Rating
			2 = 2 Pole 3 = 3 Pole		A = 120/240V, 1Ø 3W (Fig.1) ^① B = 240/120V, 3Ø 4W (Fig.3) C = 208Y/120V, 3Ø 4W (Fig.2) D = 240V, 3Ø 3W (Fig.4) E = 480Y/277V, 3Ø, 4W (Fig.1) F = 480V, 3Ø, 3W (Fig.4) G = 600V, 3Ø, 3W (Fig.4) K = 380Y/220V, 3Ø, 4W (Fig.1) L = 600Y/347V, 3Ø, 4W (Fig.1) S = 400Y/230V, 3Ø, 4W (Fig.1) T = 415Y/240V, 3Ø, 4W (Fig.1)		100 = 100kA per Mode/Phase



BSPD Series

Product specifications

General specifications		Diagnostic monitoring specifications		Design specifications	
Maximum surge current rating range	100 kA per phase	Green/red visual mechanical flag failure indicators		Monolithic distribution grade MOV	
UL Type designation	SPD Type 1 ^②	Flashing dual color LED (green/red) status indicator		Integrated optimized thermal protection	
UL 1449 I-nominal rating	20kA	Audible alarm with silence switch/button		Fits in footprint of BL/BQD, or xGB/3VA41 ^③	
UL 1449 short circuit current rating	200kA	Form C dry contact, 240V AC, 1A max, 48V DC, 0.5A max		Modes of protection (L-N or L-G, L-L)	
Repetitive impulse	5,000 hits				
Response time	<1 ns				

BSPD Catalog Numbers and UL 1449 performance data

Catalog numbers	System voltage	L-N (L-G)	L-L	I _n	SCCR	MCOV	Siemens breaker form factor
BSPD2A100 ^①	120/240V, 1Ø, 3W	600V	900	20kA	200kA	150V	2-P, BL/BQD or xGB/3VA41
BSPD3B100	240/120V, 3Ø, 4W	600V/800V	1200	20kA	200kA	150V	3-P, BL/BQD or xGB/3VA41
BSPD3C100	208Y/120V, 3Ø, 4W	600V	900	20kA	200kA	150V	3-P, BL/BQD or xGB/3VA41
BSPD3D100	240V, 3Ø, 3W	800V	1500	20kA	200kA	280V	3-P, BL/BQD or xGB/3VA41
BSPD3E100	480Y/277V, 3Ø, 4W	1000V	1800	20kA	200kA	320V	3-P, BL/BQD or xGB/3VA41
BSPD3F100	480V, 3Ø, 3W	1800V	3000	20kA	200kA	550V	3-P, BL/BQD or xGB/3VA41
BSPD3G100	600V, 3Ø, 3W	2000V	4000	20kA	200kA	700V	3-P, BL/BQD or xGB/3VA41
BSPD3K100	380Y/220V, 3Ø, 4W	900V	1800	20kA	200kA	320V	3-P, BL/BQD or xGB/3VA41
BSPD3L100	600Y/347V, 3Ø, 4W	1200V	2500	20kA	200kA	400V	3-P, BL/BQD or xGB/3VA41
BSPD3S100	400Y/230V, 3Ø, 4W	900V	1800	20kA	200kA	320V	3-P, BL/BQD or xGB/3VA41
BSPD3T100	415Y/240V, 3Ø, 4W	900V	1800	20kA	200kA	320V	3-P, BL/BQD or xGB/3V

Benefits of installing multiple BSPDs

Adding multiple BSPDs in a single panelboard can increase modes of protection and a surge capacity. See the BoltShield brochure for more details and review an example chart below:

Number of BSPDs	Connection	Modes of protection	Surge current capacity per mode	Surge current capacity per phase
1	Neutral	3	100kA	100kA
2	Neutral + Ground	6	100kA	200kA
2	Neutral(2)	3	200kA	200kA
3	Neutral(2) + Ground(1)	6	200kA(L-N) + 100kA (L-G)	300kA
3	Ground(3)	3	300kA	300kA
4	Neutral(2) + Ground(2)	6	200kA	400kA

^① Can also be used on 208Y/120V, 1Ø, 3W system.
^② Type 1 SPDs suitable for use in Type 2 applications.

^③ Each SPD comes with an adapter for xGB/3VA41 applications. Replacement adapter kit BSPDXGB1 is available, containing 2 and 3 pole adapters (1 each).

BoltShield™ Surge Protective Devices


QSPD – Residential Surge Protection for Load Centers

Catalog Logic


QSPD series for load centers

Ordering Information

QSPD catalog number logic

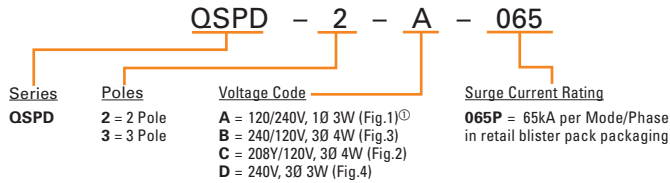

QSPD-Base catalog number logic

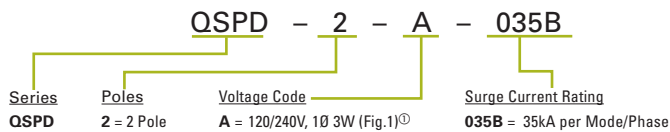

Product specifications

General specifications	QSPD	QSPD-Base
Maximum surge current rating range	65kA per phase	35kA per phase
UL Type designation	SPD Type 1 ^②	
UL 1449 I-nominal rating	20kA	
UL 1449 short circuit current rating	200kA	22kA
Repetitive impulse	5,000 hits	
Response time	<1 ns	

Diagnostic monitoring specifications	QSPD	QSPD-Base
Green/red visual mechanical flag failure indicators	✓	✓
Flashing dual color LED (green/red) status indicator	✓	—
Audible alarm with silence switch/button	✓	—
Design specifications	QSPD	QSPD-Base
Monolithic distribution grade MOV	✓	✓
Integrated optimized thermal protection	✓	✓
Fits in footprint of Siemens QP breaker	✓	✓
Modes of protection (L-N or L-G, L-L)	✓	✓

QSPD Catalog Numbers and UL 1449 performance data

Catalog numbers	System voltage	L-N (L-G)	L-L	I _n	SCCR	MCOV	Siemens breaker form factor
QSPD							
QSPD2A065P ^③	120/240V, 1Ø, 3W ^①	600V	1000	20kA	200kA	150V	2-P, QP
QSPD3B065	240/120V, 3Ø, 4W	600V/900V	1200	20kA	200kA	150V	3-P, QP
QSPD3C065	208Y/120V, 3Ø, 4W	600V	1000	20kA	200kA	150V	3-P, QP
QSPD3D065	240V, 3Ø, 3W	900V	1500	20kA	200kA	280V	3-P, QP
QSPD-Base							
QSPD2A035B	120/240V, 1Ø, 3W ^①	700V	1200	20kA	22kA	150V	2-P, QP

Benefits of installing multiple QSPDs

Adding multiple QSPDs in a single load center can increase the modes of protection and the surge capacity.

See the Boltshield brochure for more details and review the example chart below:

			Multiple QSPD		Multiple QSPD-Base	
No. of QSPDs or QSPD-Bases	Connection	Modes of protection	Surge current capacity per mode	Surge current capacity per phase	Surge current capacity per mode	Surge current capacity per phase
1	Neutral	3	65kA	65kA	35kA	35kA
2	Neutral + Ground	6	65kA	130kA	35kA	70kA
2	Neutral	3	130kA	130kA	70kA	70kA
3	Neutral(2) + Ground(1)	6	130kA(L-N) + 65kA (L-G)	195kA	70kA(L-N) + 35kA (L-G)	105kA
3	Ground	3	195kA	195kA	105kA	105kA
4	Neutral(2) + Ground(2)	6	130kA	260kA	70kA	140kA

① Can also be used on 208Y/120V, 1Ø, 3W system.
② Type 1 SPDs suitable for use in Type 2 applications.

③ QSPD2A065P comes in retail style blister pack packaging.

BoltShield™ Surge Protective Devices

FSPD – Residential Externally Mounted SPDs

NEW

Catalog Logic

FSPD Series for External Applications

FSPD036

Features & Benefits

- UL 1449 Listed
- Type 1 Rated SPD
- Surge Current Rating 36kA
- Nominal Rating 10kA
- Short Circuit Current Rating 200kA
- Voltage Code A 120/240V, 1Ø, 3W
- Reduced mode of protection (L1-N, L2-N, L-L)
- LED Protection Status Monitoring (Single LED Standard)



FSPD060 | FSPD100 | FSPD140

Features & Benefits

- UL 1449 Listed
- Type 2 Rated SPD
- Surge Current Rating:
 - FSPD060 60kA
 - FSPD100 100kA
 - FSPD140 140kA
- Nominal Rating 20kA
- Short Circuit Current Rating 200kA
- Voltage Code A 120/240V, 1Ø, 3W
- All modes of protection (L-N, L-G, N-G)
- LED Protection Status Monitoring and audible alarm
- GRM (Ground Reference Monitoring), N-G>20V detected



FSPD Series Catalog Number and Performance data

Catalog numbers	System voltage	L-N	L-G	L-L	N-G	MCOV
FSPD036	120/240V, 1Ø, 3W	700	—	1200	—	180
FSPD060	120/240V, 1Ø, 3W	700	700	1200	700	180
FSPD100	120/240V, 1Ø, 3W	700	700	1200	700	180
FSPD140	120/240V, 1Ø, 3W	700	700	1200	700	180

FirstSurge™ Total Home Surge Protection




Total Home Protection

Siemens believes today’s residential surge protectors come up short when protecting today’s modern home filled with smart appliances and electronics. This is why we developed our FirstSurge™ commercial class total home surge protectors. These electrical system surge protectors are sized for where you live. They will let you know when there is something wrong or when they are worn out.

Based upon thunderstorm frequency, geographic location, and home size, we developed a surge exposure map correlating with FirstSurge™ current capacities known to provide years of protective service for each shaded area.

Sized For Where You Live

Model	Surge Capacity
FirstSurge™ Power (FS060)	60,000 A
FirstSurge™ Plus (FS100)	100,000 A
FirstSurge™ Pro (FS140)	140,000 A

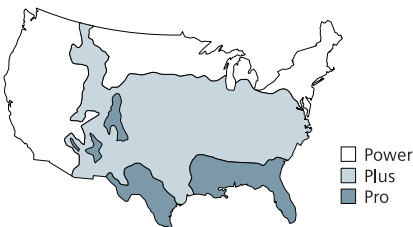

Know You’re Protected:
3 Stage Commercial Grade Notification

When there is a problem, Siemens FirstSurge™ takes the guesswork out of knowing when it is time to be replaced. What will you see and hear when this occurs?

- | | |
|--------------------|------------|
| Audible Alarm: | Beeps |
| Green LED(s): | Extinguish |
| Red Service Light: | Flashes |

Ground Reference Monitoring (GRM)

FirstSurge™ is GRM-equipped notifying you a rare safety hazard exists due to a compromised electrical system neutral to ground bond. What will you see and hear when this occurs?

- | | |
|--------------------|-------------|
| Audible Alarm: | Beeps |
| Green LED(s): | Remains Lit |
| Red Service Light: | Flashes |



SPD - Surge Protective Devices

FirstSurge

Features & Benefits

- UL 1449 Listed, Type 2, Surge Protective Device (SPD)
- Rated for 120/240 split phase panels up to 400A
- Surge Current Capacities:
 - 60,000 A
 - 100,000 A
 - 140,000 A
- 3 Stage Commercial Grade Notification
- Ground Reference Monitoring (GRM)
- Installs onto any brand load center
- Type 4 rated outdoor enclosure
- 10 year product and connected equipment warranty*


*See warranty for details

Installation Instructions:

FirstSurge™ is a Type 2 SPD. It is suitable for use downstream of the service disconnect.

Pre-Plan your installation. You need to accomplish the following:

- Meet all National and Local codes (NEC® Article 285 and UL 1449 address SPDs).
- Confirm System voltage to SPD voltage (120V SPD will fail instantly on 240V, 277V, etc.).
- Mount SPD as close to panel or equipment as possible to keep leads short. (long leads hurt performance).
- Ensure leads are as short and straight as possible, including neutral and ground. Use a breaker position that is close to the SPD and the panel's neutral and ground.
- Recommended breaker size is 20A.
- Make sure system is grounded per NEC® and clear of faults before energizing SPD. (inadvertent system problem may fail SPD).
- Never Hi-Pot test Any SPD. (will prematurely fail SPD).

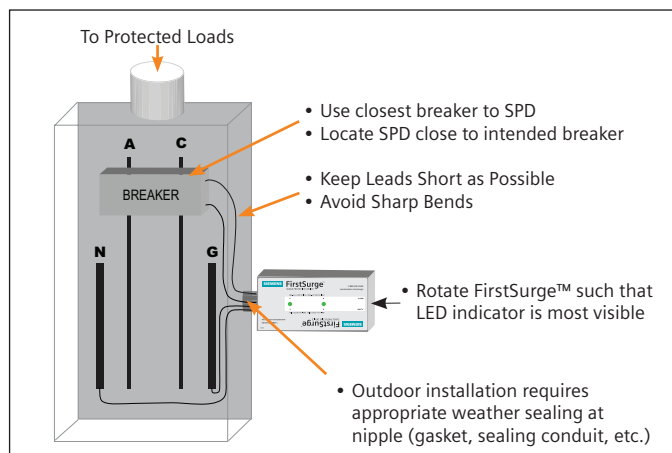

Technical Specifications	
Surge Spike Capacity	FirstSurge™ Power (FS060) 60,000 A
	FirstSurge™ Plus (FS100) 100,000 A
	FirstSurge™ Pro (FS140) 140,000 A
Line Voltage	120/240 Split Phase, 50/60 Hz
UL 1449 3rd Ed VPR	L-N: 600 V
	L-G: 600 V
	N-G: 600 V
	L-L: 900 V
Rated Voltage (MCOV)	150V – L-N, L-G, and N-G; 300V – L-L
Response Time	<1 nanosecond
Enclosure	NEMA 4X Indoor and Outdoor Rated
Selection Information	
FirstSurge™ Power	FS060
FirstSurge™ Plus	FS100
FirstSurge™ Pro	FS140
FirstSurge™ Flush Mount Kit	XMFMKIT

1. Use voltmeter to check voltages and ensure correct SPD. See Data Sheet for specs and wire-outs.
2. Determine Mounting location – weather resistant equipment may be required.
3. If SPD has optional Flush Mount Kit, pre-plan its installation. See Figure 3. (If flush mounting, be careful to not drop SPD into wall).
4. Remove power from panel/source. Confirm panel/source is deenergized.
5. Identify breaker location and SPD location. Position SPD such that LEDs are best visible. If Flush Mount Kit was ordered, follow Flush Mount instructions and then proceed at #6.
6. Mount SPD – weather resistant applications require additional sealing, etc. (not included)
 - Remove an appropriately sized knockout from panel.
 - Connect conductors as appropriate – short and straight as possible.
7. Label or mark conductors as appropriate (neutral: white, ground: green, energized: black).
8. Make sure system is bonded per NEC® and is clear of hazards or faults before energizing (N-G bonding not per NEC® will fail SPDs: #1 cause of SPD failures).
9. Energize and confirm proper operation of green LED indicators. If any connected phase LED does not illuminate, remove power, check all connections and test again. If any connected phase LED still does not illuminate, contact Siemens Technical Support at: 1-888-333-3545.
10. The SPD is equipped with an audible alarm which will sound in the event of an alarm condition. This indicates a problem with the SPD which requires further evaluation. There is no test or silence switch. De-energizing the SPD will silence the alarm.

SPD - Surge Protective Devices

TPS3 Integral or Internally Mounted SPDs

Selection

TPS3 01 and TPS3 L1 (True or Discrete 10-Mode)

Siemens TPS3 01 and L1 surge protective devices are designed for integration within our P1, P2, and P3 power distribution panel boards, as well as TIASTAR motor control centers and busway systems. The TPS3 01 and L1 SPDs feature Ground Integrity Monitoring (GIM) diagnostics

TPS3 01 and TPS3 L1 Key Features

- UL 1449-4 Type 2 SPD and UL 1283 Listed
 - Optional UL 1449 4th Edition Listed Type 1
- Type 1 / Type 2 SPD
- 100 - 300 kA Per Phase Surge Current
- 20 kA I_n (Most models)
- 200 kA SCCR (Most models)
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- Large block, individually fused, thermally protected, 50kA MOVs
- Every MOV is monitored, including N-G
- Mounts internal to:
 - P1, P2, and P3 panels
 - TIASTAR motor control centers – standard 6" bucket
 - STP series busplug on SX series busway
- Consult factory for field retrofit in P1 panels
- Modes of Protection: L-N, L-G, N-G, and L-L
- All UL required OCP & safety coordination included
 - Type 1 SPDs intended for Line or Load side of Main Disconnect
 - Type 2 SPDs intended for Load side of Main Disconnect
- Standard Monitoring: LED Indicators, Surge Counter, Dry Contacts, Audible Alarm w/ silence switch & test button
- Dimensions: 11.5" x 7.2" x 4.5"
(292.1 mm x 182.9 mm x 114.3 mm)
- Weight: 4.55 lb. (2.06 kg)
- Designed, manufactured & tested consistent with:
 - ANSI / IEEE C62.41.1-2002, C62.41.2-2002, C62.45-2002, C62.62-1010, C62.72-2007 and CSA C22.2 No. 269.1 and 269.2
 - 1992/2000 NEMA LS-1
 - NEC Article 285
 - IEC 61643, CE
- 10 Year Product Warranty

Available Options:

- Direct bus connected or can be wired to a circuit breaker (include W option)



TPS3 01

Ordering Information

Catalog # TPS3 ☐ 01 ☐ ☐ ☐ ☐ ☐				
Voltage Code	Surge Current (kA)	Options		
A = 120/240 V, 10, 3W B = 120/240 V, 30, 4W C = 120/208 V, 30, 4W D = 240 V, 30, 3W E = 277/480 V, 30, 4W F = 480 V, 30, 3W G = 600 V, 30, 3W ^① K = 380/220 V, 30, 4W L = 600/347 V, 30, 4W S = 400/230 V, 30, 4W	10 = 100 kA per phase 15 = 150 kA per phase 20 = 200 kA per phase 25 = 250 kA per phase 30 = 300 kA per phase	X = Surge counter (Standard) W = Terminal lug B = Busway application M = MCC application	2 = Type 2 SPD (Default) Includes UL 1283 EMI/RFI Filters 0 = Type 1 SPD (Consult Factory Prior to Ordering)	

Example: **TPS3C0120X002** = Type 2 SPD (Default) for a 208/120V panelboard with a surge current capacity of 200 kA per phase and a surge counter.

When an option is not selected, include a **zero (0)** in the field.

Available Accessories: Ordered Separately

RMSIE = Remote monitor

① Available in 100 kA & 150 kA only



TPS3 L1

Ordering Information

Catalog # TPS3 ☐ L1 ☐ ☐ ☐ ☐ ☐				
Voltage Code	Surge Current (kA)	Options		
A = 120/240 V, 10, 3W B = 120/240 V, 30, 4W C = 120/208 V, 30, 4W E = 277/480 V, 30, 4W K = 380/220 V, 30, 4W S = 400/230 V, 30, 4W	15 = 150 kA per phase 30 = 300 kA per phase	X = Surge counter (Standard) W = Terminal lug B = Busway application M = MCC application	2 = Type 2 SPD (Default) Includes UL 1283 EMI/RFI Filters 0 = Type 1 SPD	

Example: **TPS3CL130X002** = 10 Mode Type 2 SPD (Default) for a 208/120V panelboard with a surge current capacity of 300 kA per phase and a surge counter.

When an option is not selected, include a **zero (0)** in the field.

Available Accessories: Ordered Separately

RMSIE = Remote monitor

SPD - Surge Protective Devices

TPS4 Integral or Internally Mounted SPDs

Selection

TPS4 01 and TPS4 L1 (True or Discrete 10-Mode)

Siemens TPS4 01 and L1 surge protective devices are designed for integration within our RP1, P2, and P3 power distribution panel boards, as well as TIASTAR motor control centers and busway systems. The TPS4 01 and L1 SPDs feature Ground Integrity Monitoring (GIM) diagnostics

TPS4 01 and TPS4 L1 Key Features

- UL 1449-5 Type 2 SPD and UL 1283 Listed
 - Optional UL 1449 5th Edition Listed Type 1
- Type 1 / Type 2 SPD
- 100 - 500 kA Per Phase Surge Current
- 20 kA I_n
- 200 kA SCCR
- Voltage Protection Rating (VPRs)
 - 208/120 V, 3Ø, 4W: 500V
 - 480/277 V, 3Ø, 4W: 1000V
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- New Large Block MOV Pill Stack Design
- Every MOV is monitored, including N-G
- Mounts internal to:
 - RP1, P2, and P3 panels
 - TIASTAR motor control centers – standard 6" bucket
 - STP series busplug on SX series busway
- Consult factory for field retrofit in P1 panels
- Modes of Protection: L-N, L-G, N-G, and L-L
- All UL required OCP & safety coordination included
 - Type 1 SPDs intended for Line or Load side of Main Disconnect
 - Type 2 SPDs intended for Load side of Main Disconnect
- Standard Monitoring: LCD Event Counter with Time and Date Stamp, LED Indicators, Surge Counter, Dry Contacts, Audible Alarm w/ silence switch & test button
- Dimensions: 9.25" x 4.5" x 4.29"
(235 mm x 114.3 mm x 109 mm)
- Weight: 4.55 lb. (2.06 kg)
- Designed, manufactured & tested consistent with:
 - ANSI / IEEE C62.41.1-2002, C62.41.2-2002, C62.45-2002, C62.62-1010, C62.72-2007 and CSA C22.2 No. 269.1 and 269.2
 - 1992/2000 NEMA LS-1
 - NEC Article 285
 - IEC 61643, CE
- 10 Year Product Warranty

Available Options:

- Direct bus connected or can be wired to a circuit breaker (include W option)



Ordering Information

Catalog # TPS4 ☐ 01 ☐ ☐ ☐ ☐				
Voltage Code	Surge Current (kA)	Options		
A = 240/120 V, 1Ø, 3W ^①	10 = 100 kA per phase	X = Surge counter (Standard)		
B = 240/120 V, 3Ø, 4W	15 = 150 kA per phase	0 = Std config (default)		
C = 208/120 V, 3Ø, 4W	20 = 200 kA per phase	W = Terminal lug		
W = 220/127 V, 3Ø, 4W	25 = 250 kA per phase	0 = Std config (default)		
D = 240 V, 3Ø, 3W	30 = 300 kA per phase	B = Busway application		
E = 480/277 V, 3Ø, 4W	40 = 400 kA per phase	M = MCC application		
F = 480 V, 3Ø, 3W	50 = 500 kA per phase			
G = 600 V, 3Ø, 3W ^②				
K = 380/220 V, 3Ø, 4W				
L = 600/347 V, 3Ø, 4W				
S = 400/230 V, 3Ø, 4W				
T = 415/240 V, 3Ø, 4W				

Example: **TPS4C0120X000** = SPD for a 208/120V panelboard with a surge current capacity of 200 kA per phase and a surge counter option.

When an option is not selected, include a **zero (0)** in the field.

① Can also be used on 208Y/120V, 1Ø, 3W System
② Not available in 300, 400 or 500 kA versions

Please note: The TPS4 01 series is not suitable for use in the Original P1 Lighting Panels - Only Revised P1 Lighting Panels.



Ordering Information

Catalog # TPS4 ☐ L1 ☐ ☐ ☐ ☐				
Voltage Code	Surge Current (kA)	Options		
A = 240/120 V, 1Ø, 3W ^①	15 = 150 kA per phase	X = Surge counter (Standard)		
B = 240/120 V, 3Ø, 4W	30 = 300 kA per phase	0 = Std config (default)		
C = 208/120 V, 3Ø, 4W	45 = 450 kA per phase	W = Terminal lug		
W = 220/127 V, 3Ø, 4W	55 = 550 kA per phase	0 = Std config (default)		
E = 480/277 V, 3Ø, 4W	75 = 750 kA per phase	B = Busway application		
K = 380/220 V, 3Ø, 4W		M = MCC application		
L = 600/347 V, 3Ø, 4W ^②				
S = 400/230 V, 3Ø, 4W				
T = 415/240 V, 3Ø, 4W				

Example: **TPS4CL120X000** = SPD for a 208/120V panelboard with a surge current capacity of 200kA per phase and a surge counter option.

When an option is not selected, include a **zero (0)** in the field.

① Can also be used on 208Y/120V, 1Ø, 3W System
② Not available in 450, 550 or 750 kA versions

Please note: The TPS4 L1 series is not suitable for use in the Original P1 Lighting Panels - Only Revised P1 Lighting Panels.

SPD - Surge Protective Devices

TPS3 Integral or Internally Mounted SPDs

Selection

TPS3 02 and TPS3 L2 (True or Discrete 10-Mode)

Siemens TPS3 02 and L2 surge protective devices are designed for integration within our Revised P1 power distribution panel boards. The TPS3 02 and L2 SPDs feature Ground Integrity Monitoring (GIM) diagnostics.

TPS3 02 and TPS3 L2 Key Features

- UL 1449-4 Type 2 SPD and UL 1283 Listed
 - Optional UL 1449 4th Edition Recognized Type 1
- Type 1 / Type 2 SPD
- 100 - 300 kA Per Phase Surge Current
- Large block, individually fused, thermally protected, 50kA MOVs
- 20 kA I_n (Most models)
- 200 kA SCCR (Most models)
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- Large block, individually fused, thermally protected, 50kA MOVs
- Every MOV is monitored, including N-G
- Mounts internal to:
 - Revised P1 Lighting Panelboards
- Consult factory for field retrofit in P1 panels
- Modes of Protection: L-N, L-G, N-G, and L-L
- All UL required OCP & safety coordination included
 - Type 1 SPDs intended for Line or Load side of Main Disconnect
 - Type 2 SPDs intended for Load side of Main Disconnect
- Standard Monitoring: LED Indicators, Surge Counter, Dry Contacts, Audible Alarm w/ silence switch & test button
- Dimensions: 11.6" x 5.7" x 4.9"
(294.6 mm x 144.8 mm x 124.5 mm)
- Weight: 4.55 lb. (2.06 kg)
- 10 Year Product Warranty

Available Options:

- Direct bus connected
- Can be wired to a circuit breaker (consult factory at time of order or see installation manual for retrofit)



TPS3 02

Ordering Information

Catalog # TPS3 ☐ 02 ☐ ☐ ☐ ☐			
Voltage Code	Surge Current (kA)	Options	
A = 120/240 V, 1Ø, 3W	10 = 100 kA per phase	X = Surge counter (Standard)	
B = 120/240 V, 3Ø, 4W	15 = 150 kA per phase	2 = Type 2 SPD (Default)	
C = 120/208 V, 3Ø, 4W	20 = 200 kA per phase	Includes UL 1283 EMI/RFI Filters	
D = 240 V, 3Ø, 3W	25 = 250 kA per phase	0 = Type 1 SPD	
E = 277/480 V, 3Ø, 4W	30 = 300 kA per phase	(Consult Factory Prior to Ordering)	
F = 480 V, 3Ø, 3W			
G = 600 V, 3Ø, 3W ^①			
K = 380/220 V, 3Ø, 4W			
L = 600/347 V, 3Ø, 4W			
S = 400/230 V, 3Ø, 4W			


Example: **TPS3C0220X2** = Type 2 SPD (Default) for a 208/120V panelboard with a surge current capacity of 200 kA per phase and a surge counter.

When an option is not selected, include a **zero (0)** in the field.

Available Accessories: Ordered Separately

RMSIE = Remote monitor

① Available in 100kA & 150 kA only

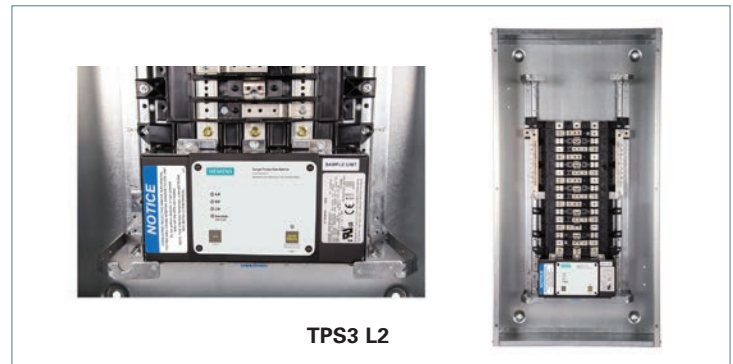

TPS3 L2

Ordering Information

Catalog # TPS3 ☐ L2 ☐ ☐ ☐ ☐			
Voltage Code	Surge Current (kA)	Options	
A = 120/240 V, 1Ø, 3W	15 = 150 kA per phase	X = Surge counter (Standard)	
B = 120/240 V, 3Ø, 4W	30 = 300 kA per phase	2 = Type 2 SPD (Default)	
C = 120/208 V, 3Ø, 4W		Includes UL 1283 EMI/RFI Filters	
E = 277/480 V, 3Ø, 4W		0 = Type 1 SPD	
K = 380/220 V, 3Ø, 4W		(Consult Factory Prior to Ordering)	
S = 400/230 V, 3Ø, 4W			

Example: **TPS3CL230X2** = 10 Mode Type 2 SPD (Default) for a 208/120 V panelboard with a surge current capacity of 300 kA per phase and a surge counter.

When an option is not selected, include a **zero (0)** in the field.

Available Accessories: Ordered Separately

RMSIE = Remote monitor

SPD - Surge Protective Devices

TPS3 External or Wall Mounted SPDs

Selection

TPS3 03

TPS3 03 is a UL 1449 4th Edition 50 kA Type 1 compact surge protective device that can be used as a replacement secondary surge or lightning arrestors. Having a Type 1 designation allows for flexible electrical system connection location (line or load side) as well as UL 96A compliance (@ 20 kA I_{IN}).

TPS3 03 Key Features

- UL 1449 4th Edition Listed Type 1
- Type 1 Rated SPD
- 50 kA Per Phase Surge Current
- 20 kA I_{IN} (Most models)
- 200 kA SCCR (Most models)
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- Every MOV is monitored
- Mounts external to electrical distribution equipment
 - Recommend for Line Side or Load Side Applications
- Standard compact NEMA 4X polycarbonate enclosure
- Modes of Protection: L-N or L-G and L-L
- Standard Monitoring: LED Indicator
- Dimensions: 3.25" x 3.25" x 3.3" (82.6 mm x 82.6 mm x 83.8 mm)
- Weight: 2 lb. (0.9 kg)
- 2 Year Product Warranty

Available Options:

- Dry contacts & Audible Alarm (option "D")
- Neutral to Ground Protection (option "N")



Ordering Information

Catalog # TPS3

Voltage Code	Surge Current (kA)	Options
A = 120/240 V, 1Ø, 3W	05 = 50 kA per phase	D = Dry contact & audible alarm
B = 120/240 V, 3Ø, 4W		N = Adds N-G Protection
C = 120/208 V, 3Ø, 4W		
D = 240 V, 3Ø, 3W		
E = 277/480 V, 3Ø, 4W		
F = 480 V, 3Ø, 3W		
G = 600 V, 3Ø, 3W		
K = 380/220 V, 3Ø, 4W		
L = 600/347 V, 3Ø, 4W		

Example: **TPS3C0305D0** = Type 1 SPD for a 208/120V application with a surge current capacity of 50 kA per phase, in a standard NEMA 4X enclosure with dry contacts and audible alarm option.

When an option is not selected, include a **zero (0)** in the field.

Available Accessories: Ordered Separately

RMSIE = Remote monitor

SPD - Surge Protective Devices

TPS4 External or Wall Mounted SPDs

Selection

TPS4 03

TPS4 03 is a UL 1449 4th Edition 50 kA Type 1 compact surge protective device that can be used as a replacement secondary surge or lightning arrestors. Having a Type 1 designation allows for flexible electrical system connection location (line or load side) as well as UL 96A compliance (@ 20 kA I_N).

TPS4 03 Key Features

- UL 1449 4th Edition Listed Type 1
- Type 1 Rated SPD
- 50 kA Per Phase Surge Current
- 20 kA I_N
- 200 kA SCCR
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- Every MOV is monitored
- Mounts external to electrical distribution equipment
 - Recommend for Line Side or Load Side Applications
- Standard compact NEMA 4X polycarbonate enclosure
- Modes of Protection: L-N or L-G and L-L
- Standard Monitoring: LED Indicator
- Dimensions: 4.25" x 2.41" x 2.75"
- Weight: .5 lb.
- 2 Year Product Warranty

Available Options:

- Neutral to Ground Protection (option "N")



Ordering Information

Catalog #			
TPS4	03		
Voltage Code			
A = 120/240 V, 1Ø, 3W B = 120/240 V, 3Ø, 4W C = 120/208 V, 3Ø, 4W W = 220/127 V, 3Ø, 4W D = 240 V, 3Ø, 3W E = 277/480 V, 3Ø, 4W F = 480 V, 3Ø, 3W G = 600 V, 3Ø, 3W K = 380/220 V, 3Ø, 4W L = 600/347 V, 3Ø, 4W S = 400/230 V, 3Ø, 4W T = 415/240 V, 3Ø, 4W			
Surge Current (kA)			
05 = 50 kA per phase			
Options			
0 = Dry contact & audible alarm N = Adds N-G Protection			

SPD - Surge Protective Devices

TPS3 External or Wall Mounted SPDs

Selection


TPS3 03 DC

TPS3 03 DC is available in 300VDC version, which is designed to protect photovoltaic electrical systems. Typical PV installation would be on the DC solar panel side and also on the AC side of the inverter/converter. AC voltage TPS3 03's are also available. SPDs are highly recommended when lightning activity is present to protect sensitive electrical photovoltaic components.


TPS3 03 DC is designed as a stand alone device in a NEMA 4X polycarbonate enclosure. Large block, thermally protected 50 kA MOVs are utilized. A green LED illuminates for diagnostic monitoring. TPS3 03 DC comes standard with a Tri-Mount installation kit which allows it to be Nipple, DIN-rail or Bracket mounted.



Diagram

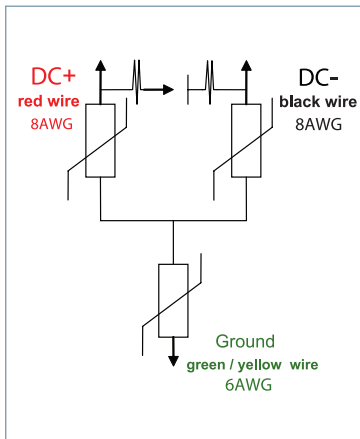

Dimensions

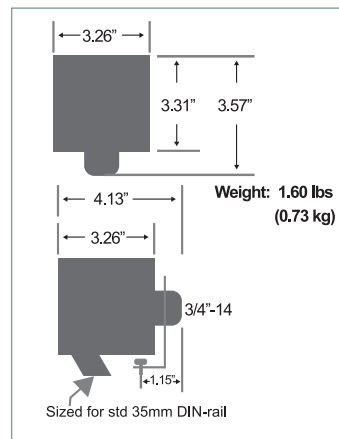


Ordering Information

Catalog # **TPS3** ☐ 0305

Voltage Code
M = 300 VDC

Tri-Mount Installation

Mounting Kit Included

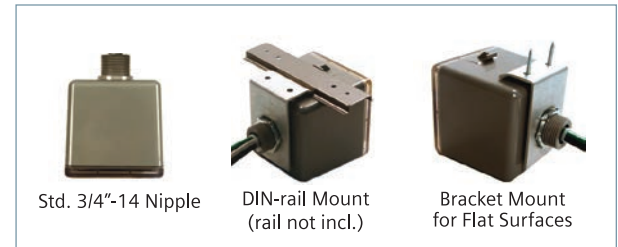

Performance Data

Siemens Part Number		TPS3M0305
Modes of Protection		DC+ – DC- , DC+ – Ground, DC- – Ground
Nominal Network Voltage	U_n	300VDC
Technology		Large Block, Thermally Protected 50kA MOVs
Maximum Continuous Operating Voltage DC	U_c	425VDC
Maximum Surge Current (8/20 μ s)	I_{max}	50kA
Nominal Discharge Current (8/20 μ s)	I_n	20kA
Voltage Protection Level (3kA 8/20 μ s)	U_p	<600V
Operating Temperature		-40oC + 65oC
Response Time	t_A	<1ns
Installation mounting method		DIN Rail, Nipple or Bracket
Enclosure Material		NEMA 4X Polycarbonate
Wiring (red = + , black = - , green / yellow = gnd)		Pre-wired w/3'(~1m) of 8AWG + 6AWG Ground Conductor
Diagnostic circuit		Low Consumption LED Indicator
Safety Disconnectors		Thermal/Overcurrent Protection; Arc-Breaking Slide Gate
UL Listing		UL 1449 Listed as Type 1 SPD as a DC SPD for PV and other types of DC applications
Warranty		5 Years

SPD - Surge Protective Devices

TPS3 Integral or Internally Mounted SPDs

Selection

TPS3 05 and TPS3 L5 (True or Discrete 10-Mode)

Siemens TPS3 05 and L5 surge protective devices are designed for integration within our P4 and P5 panelboards as well as distribution switchboards. The TPS3 05 and L5 SPDs feature Ground Integrity Monitoring (GIM) diagnostics.

TPS3 05 and TPS3 L5 Key Features


- UL 1449-4 Type 2 SPD and UL 1283 Listed
 - Optional UL 1449 4th Edition Listed Type 1
- Type 1 / Type 2 SPD
- 100 - 300 kA Per Phase Surge Current
- 20 kA I_n (Most models)
- 200 kA SCCR (Most models)
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- Large block, individually fused, thermally protected, 50kA MOVs
- Every MOV is monitored, including N-G
- Mounts internal to:
 - P4 & P5 panelboards and distribution switchboards
- Modes of Protection: L-N, L-G, N-G, and L-L
- All UL required OCP & safety coordination included
 - Type 1 SPDs intended for Line or Load side of Main Disconnect
 - Type 2 SPDs intended for Load side of Main Disconnect
- Standard Monitoring: LED Indicators, Surge Counter, Dry Contacts, Audible Alarm w/ silence switch & test button
- Dimensions: 10" x 17" x 6" (254 mm x 431.8 mm x 152.4 mm)
- Weight: 9.4 lb. (4.2 kg)
- Designed, manufactured & tested consistent with:
 - ANSI / IEEE C62.41.1-2002, C62.41.2-2002, C62.45-2002, C62.62-1010, C62.72-2007 and CSA C22.2 No. 269.1 and 269.2
 - 1992/2000 NEMA LS-1
 - NEC Article 285
 - IEC 61643, CE
- 10 Year Product Warranty

Panelboard Features:

- Copper or aluminum bus MB or MLO

Switchboard Features:

- Copper or aluminum bus
- 200% rated neutral bus for harmonic-rich applications
- CSA, UL 891, UL 67 and NEMA PB-2

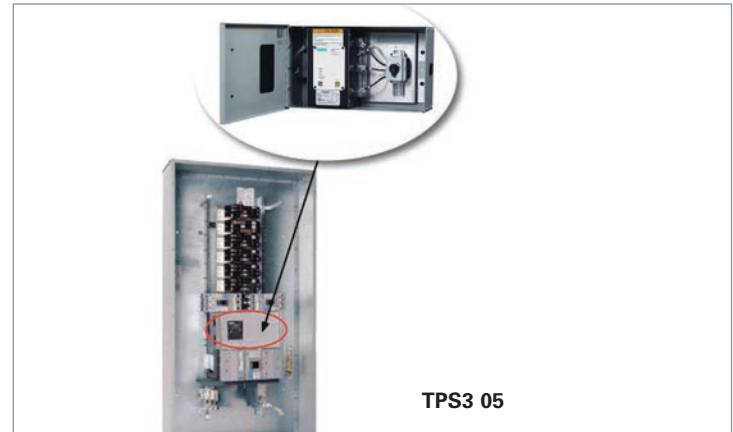

TPS3 05

Ordering Information

Catalog # TPS3 ☐ 05 ☐ ☐ ☐ ☐			
Voltage Code	Surge Current (kA)	Options	
A = 120/240 V, 1Ø, 3W	10 = 100 kA per phase	X = Surge counter (Standard) 2 = Type 2 SPD (Default) Includes UL 1283 EMI/RFI Filters 0 = Type 1 SPD (Consult Factory Prior to Ordering)	
B = 120/240 V, 3Ø, 4W	15 = 150 kA per phase		
C = 120/208 V, 3Ø, 4W	20 = 200 kA per phase		
D = 240 V, 3Ø, 3W	25 = 250 kA per phase		
E = 277/480 V, 3Ø, 4W	30 = 300 kA per phase		
F = 480 V, 3Ø, 3W			
G = 600 V, 3Ø, 3W ^①			
K = 380/220 V, 3Ø, 4W			
L = 600/347 V, 3Ø, 4W			
S = 400/230 V, 3Ø, 4W			


Example: **TPS3C0530X2** = Type 2 SPD (Default) for a 208/120V power panel with a surge current capacity of 300 kA per phase and a surge counter.

When an option is not selected, include a **zero (0)** in the field.

Available Accessories: Ordered Separately

RMSIE = Remote monitor

^① Available in 100 kA & 150 kA only

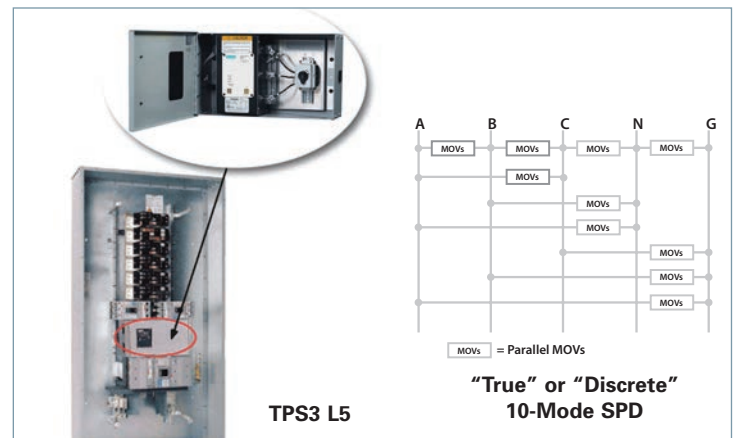

TPS3 L5

Ordering Information

Catalog # TPS3 ☐ L5 ☐ ☐ ☐ ☐			
Voltage Code	Surge Current (kA)	Options	
A = 120/240 V, 1Ø, 3W	15 = 150 kA per phase	X = Surge counter (Standard) 2 = Type 2 SPD (Default) Includes UL 1283 EMI/RFI Filters 0 = Type 1 SPD (Consult Factory Prior to Ordering)	
B = 120/240 V, 3Ø, 4W	30 = 300 kA per phase		
C = 120/208 V, 3Ø, 4W			
E = 277/480 V, 3Ø, 4W			
K = 380/220 V, 3Ø, 4W			
S = 400/230 V, 3Ø, 4W			

Example: **TPS3C0530X2** = Type 2 SPD (Default) for a 208/120V power panel with a surge current capacity of 300 kA per phase and a surge counter.

When an option is not selected, include a **zero (0)** in the field.

Available Accessories: Ordered Separately

RMSIE = Remote monitor

SPD - Surge Protective Devices

TPS4 Integral or Internally Mounted SPDs

Selection

TPS4 05 and TPS4 L5 (True or Discrete 10-Mode)

Siemens TPS4 05 and L5 surge protective devices are designed for integration within our P4 and P5 panelboards as well as distribution switchboards. The TPS4 05 and L5 SPDs feature Ground Integrity Monitoring (GIM) diagnostics.

TPS4 05 and TPS4 L5 Key Features


- UL 1449 Type 2 SPD and UL 1283 Listed
 - Optional UL 1449 Listed Type 1
- Type 1 / Type 2 SPD
- 100 - 500 kA Per Phase Surge Current
- 20 kA I_n
- 200 kA SCCR
- Voltage Protection Rating (VPRs)
 - 208/120 V, 3Ø, 4W: 600V
 - 480/277 V, 3Ø, 4W: 1000V
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- New Large Block MOV Pill Stack Design
- Every MOV is monitored, including N-G
- Mounts internal to:
 - P4 & P5 panelboards and distribution switchboards
- Modes of Protection: L-N, L-G, N-G, and L-L
- All UL required OCP & safety coordination included
 - Type 1 SPDs intended for Line or Load side of Main Disconnect
 - Type 2 SPDs intended for Load side of Main Disconnect
- Standard Monitoring: LCD Event Counter with Time and Date Stamp, LED Indicators, Surge Counter, Dry Contacts, Audible Alarm w/ silence switch & test button
- Dimensions: 17" x 10" x 6"
(434 mm x 254 mm x 154 mm)
- Weight: 22 lbs. (10 kg)
- Designed, manufactured & tested consistent with:
 - ANSI / IEEE C62.41.1-2002, C62.41.2-2002, C62.45-2002, C62.62-1010, C62.72-2007 and CSA C22.2 No. 269.1 and 269.2
 - 1992/2000 NEMA LS-1
 - NEC Article 285
 - IEC 61643, CE
- 10 Year Product Warranty

Panelboard Features:

- Copper or aluminum bus
- MB or MLO

Switchboard Features:

- Copper or aluminum bus
- 200% rated neutral bus for harmonic-rich applications
- CSA, UL 891, UL 67 and NEMA PB-2

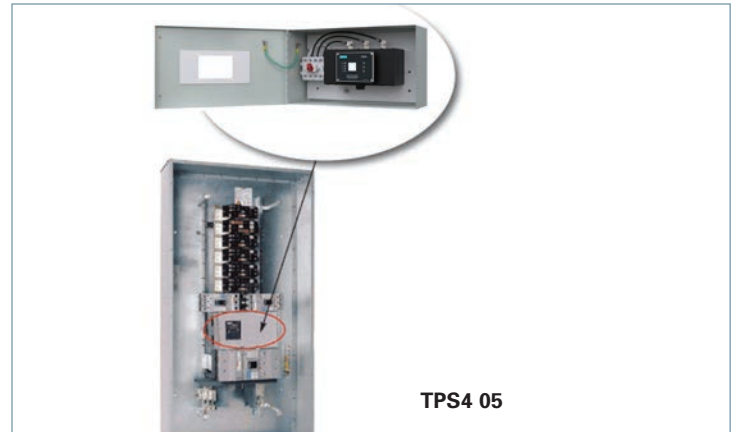

TPS4 05


Ordering Information

Catalog # TPS4 ☐ 05 ☐ ☐ X ☐			
Voltage Code	Surge Current (kA)	Options	
A = 240/120V, 1Ø, 3W	10 = 100 kA per phase	X = Surge counter (Standard)	
B = 240/120V, 3Ø, 4W	15 = 150 kA per phase	2 = Type 2 SPD (Default)	
C = 208/120V, 3Ø, 4W	20 = 200 kA per phase	Includes UL 1283 EMI/RFI Filters	
W = 220/127V, 3Ø, 4W	25 = 250 kA per phase	0 = Type 1 SPD	
D = 240V, 3Ø, 3W	30 = 300 kA per phase	(Consult Factory Prior to Ordering)	
E = 480/277V, 3Ø, 4W	40 = 400kA per phase		
F = 480V, 3Ø, 3W	50 = 500kA per phase		
G = 600V, 3Ø, 3W ^①			
K = 380/220V, 3Ø, 4W			
L = 600/347V, 3Ø, 4W			
S = 400/230V, 3Ø, 4W			
T = 415/240V, 3Ø, 4W			

Example: **TPS4C0520X2** = SPD for a 208/120V panelboard with a surge current capacity of 200kA per phase and Type 2 SPD.

When an option is not selected, include a **zero (0)** in the field.

① Not available in 300, 400 or 500kA versions

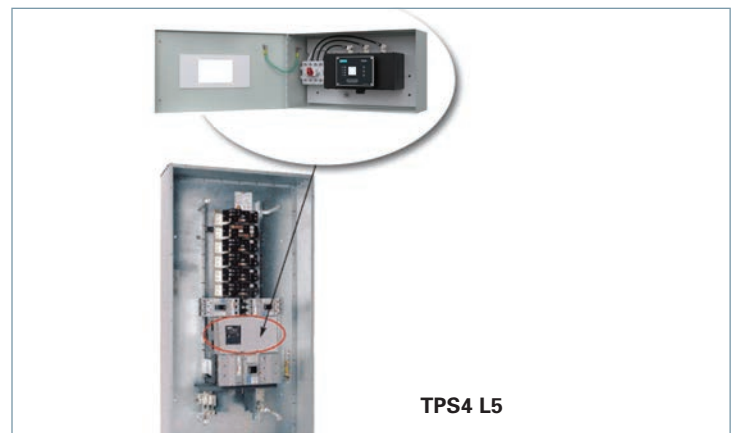

TPS4 L5

Ordering Information

Catalog # TPS4 ☐ L5 ☐ ☐ X ☐			
Voltage Code	Surge Current (kA)	Options	
A = 240/120V, 1Ø, 3W	15 = 150 kA per phase	X = Surge counter (Standard)	
B = 240/120V, 3Ø, 4W	30 = 300 kA per phase	2 = Type 2 SPD (Default)	
C = 208/120V, 3Ø, 4W	45 = 450 kA per phase	Includes UL 1283 EMI/RFI Filters	
W = 220/127V, 3Ø, 4W	55 = 550 kA per phase	0 = Type 1 SPD	
E = 480/277V, 3Ø, 4W	75 = 750 kA per phase		
K = 380/220V, 3Ø, 4W			
L = 600/347V, 3Ø, 4W ^①			
S = 400/230V, 3Ø, 4W			
T = 415/240V, 3Ø, 4W			

Example: **TPS4CL520X2** = SPD for a 208/120V panelboard with a surge current capacity of 200kA per phase and Type 2 SPD.

When an option is not selected, include a **zero (0)** in the field.

① Not available in 450, 550 or 750kA versions

SPD - Surge Protective Devices

TPS3 Integral or Internally Mounted SPDs


Selection

TPS3 06 and TPS3 L6 (True or Discrete 10-Mode)

Siemens TPS3 06 and L6 surge protective devices are designed for integration within our SB1, SB2, SB3, Type RCS Switchboards, Low-Voltage Switchgear, Motor Control Centers, and Busway Systems. The TPS3 06 and L6 SPDs feature Ground Integrity Monitoring (GIM) diagnostics.

TPS3 06 and TPS3 L6 Key Features

- UL 1449-4 Type 2 SPD and UL 1283 Listed
 - Optional UL 1449 4th Edition Listed Type 1
- Type 1 / Type 2 SPD
- 100 - 500 kA Per Phase Surge Current
- 20 kA I_n (Most models)
- 200 kA SCCR (Most models)
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- Large block, individually fused, thermally protected, 50kA MOVs
- Every MOV is monitored, including N-G
- Mounts internal to:
 - SB1, SB2, SB3 and Type RCS Switchboards
 - Type WL low-voltage switchgear
 - TIASTAR motor control centers - standard 12" bucket
 - STP series busplug on SX series busway
- Modes of Protection: L-N, L-G, N-G, and L-L
- All UL required OCP & safety coordination included
 - Type 1 SPDs intended for Line or Load side of Main Disconnect
 - Type 2 SPDs intended for Load side of Main Disconnect
- Standard Monitoring: LED Indicators, Surge Counter, Dry Contacts, Audible Alarm w/ silence switch & test button, Rotary disconnect switch
- Dimensions: 10.7" x 11.5" x 4.5"
(271.8 mm x 292.1 mm x 114.3 mm)
- Weight: 6.8 lb. (3.0 kg)
- Designed, manufactured & tested consistent with:
 - ANSI / IEEE C62.41.1-2002, C62.41.2-2002, C62.45-2002, C62.62-1010, C62.72-2007 and CSA C22.2 No. 269.1 and 269.2
 - 1992/2000 NEMA LS-1
 - NEC Article 285
 - IEC 61643, CE
- Designed, manufactured & tested consistent with:
 - ANSI / IEEE C62.41.1-2002, C62.41.2-2002, C62.45-2002, C62.62-1010, C62.72-2007 & CSA C22.2 No. 269.1 and .2
 - 1992/2000 NEMA LS-1
 - NEC Article 285
 - IEC 61643, CE
- 10 Year Product Warranty

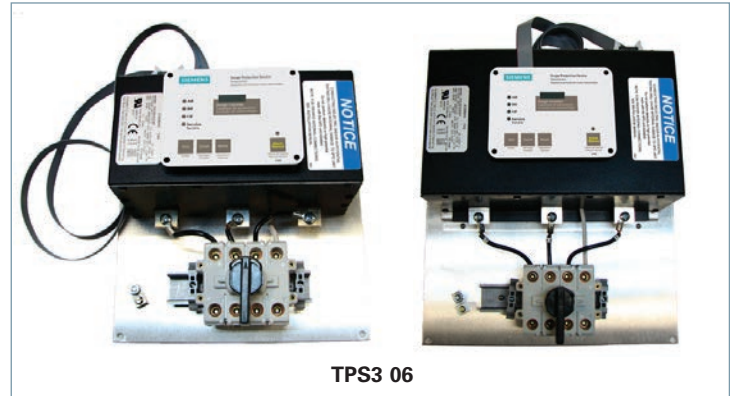

TPS3 06

Ordering Information

Catalog # TPS3 ☐ 06 ☐ ☐ ☐ ☐ ☐

Voltage Code	Surge Current (kA)	Options	
A = 120/240 V, 1Ø, 3W	10 = 100 kA per phase	X = Surge counter (Standard)	2 = Type 2 SPD (Default) Includes UL 1283 EMI/RFI Filters 0 = Type 1 SPD (Consult Factory Prior to Ordering)
B = 120/240 V, 3Ø, 4W	15 = 150 kA per phase		
C = 120/208 V, 3Ø, 4W	20 = 200 kA per phase	B = Busway application	
D = 240 V, 3Ø, 3W ^②	25 = 250 kA per phase	M = MCC application	
E = 277/480 V, 3Ø, 4W	30 = 300 kA per phase		
F = 480 V, 3Ø, 3W ^②	40 = 400 kA per phase		
G = 600 V, 3Ø, 3W ^①	50 = 500 kA per phase		
K = 380/220 V, 3Ø, 4W			
L = 600/347 V, 3Ø, 4W			
S = 400/230 V, 3Ø, 4W			

Example: **TPS3C0120X002** = Type 2 SPD (Default) for a 208/120V panelboard with a surge current capacity of 200 kA per phase and a surge counter.


When an option is not selected, include a **zero (0)** in the field.

Available Accessories: Ordered Separately


RMSIE = Remote monitor

① G voltage code only available in 200 & 250 kA

② Not available in 500 kA

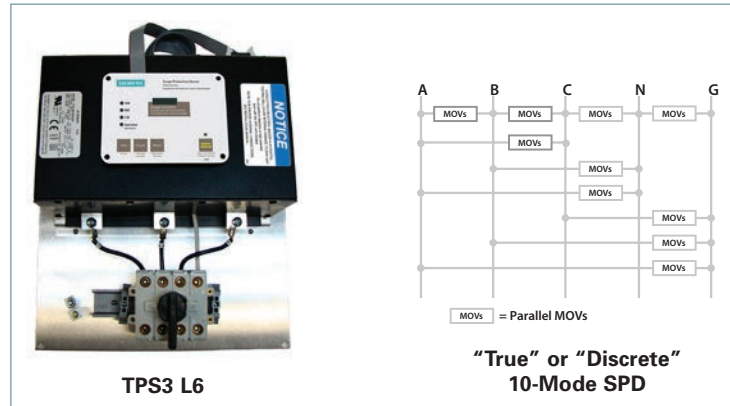

TPS3 L6



"True" or "Discrete"
10-Mode SPD

Ordering Information

Catalog # TPS3 ☐ L6 ☐ ☐ ☐ ☐ ☐

Voltage Code	Surge Current (kA)	Options	
A = 120/240 V, 1Ø, 3W	15 = 150 kA per phase	X = Surge counter (Standard)	2 = Type 2 SPD (Default) Includes UL 1283 EMI/RFI Filters 0 = Type 1 SPD (Consult Factory Prior to Ordering)
B = 120/240 V, 3Ø, 4W	30 = 300 kA per phase		
C = 120/208 V, 3Ø, 4W	45 = 450 kA per phase	B = Busway application	
E = 277/480 V, 3Ø, 4W		M = MCC application	
K = 380/220 V, 3Ø, 4W			
S = 400/230 V, 3Ø, 4W			

Example: **TPS3CL645X2** = 10 mode Type 2 SPD (Default) for a 208/120V switchboard with a surge current capacity of 450 kA per phase and a surge counter.

When an option is not selected, include a **zero (0)** in the field.

Available Accessories: Ordered Separately

RMSIE = Remote monitor

SPD - Surge Protective Devices

TPS4 Integral or Internally Mounted SPDs

Selection

TPS4 06 and TPS4 L6 (True or Discrete 10-Mode)

Siemens TPS4 06 and L6 surge protective devices are designed for integration within our SB1, SB2, SB3, Type RCS Switchboards and Low-Voltage Switchgear. The TPS4 06 and L6 SPDs feature Ground Integrity Monitoring (GIM) diagnostics.

TPS4 06 and TPS4 L6 Key Features

- UL 1449 Type 2 SPD and UL 1283 Listed
 - Optional UL 1449 Listed Type 1
- Type 1 / Type 2 SPD
- 100 - 500 kA Per Phase Surge Current
- 20 kA I_n
- 200 kA SCCR
- Voltage Protection Rating (VPRs)
 - 208/120 V, 3Ø, 4W: 600V
 - 480/277 V, 3Ø, 4W: 1000V
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- New Large Block MOV Pill Stack Design
- Every MOV is monitored, including N-G
- Mounts internal to:
 - SB1, SB2, SB3 and Type RCS Switchboards
 - Type WL low-voltage switchgear
- Modes of Protection: L-N, L-G, N-G, and L-L
- All UL required OCP & safety coordination included
 - Type 1 SPDs intended for Line or Load side of Main Disconnect
 - Type 2 SPDs intended for Load side of Main Disconnect
- Standard Monitoring: LCD Event Counter with Time and Date Stamp, LED Indicators, Surge Counter, Dry Contacts, Audible Alarm w/ silence switch & test button
- Dimensions: 11" x 11" x 4.5"
(276 mm x 276 mm x 115 mm)
- Weight: 7.4 lbs (3.4 kg)
- Designed, manufactured & tested consistent with:
 - ANSI / IEEE C62.41.1-2002, C62.41.2-2002, C62.45-2002, C62.62-1010, C62.72-2007 and CSA C22.2 No. 269.1 and 269.2
 - 1992/2000 NEMA LS-1
 - NEC Article 285
 - IEC 61643, CE
- Designed, manufactured & tested consistent with:
 - ANSI / IEEE C62.41.1-2002, C62.41.2-2002, C62.45-2002, C62.62-1010, C62.72-2007 & CSA C22.2 No. 269.1 and .2
 - 1992/2000 NEMA LS-1
 - NEC Article 285
 - IEC 61643, CE
- 10 Year Product Warranty



TPS4 06

Ordering Information

Catalog # TPS4 ☐ 06 ☐ ☐ X ☐			
Voltage Code	Surge Current (kA)	Options	
A = 240/120V, 1Ø, 3W	10 = 100 kA per phase	X = Surge counter (Standard)	
B = 240/120V, 3Ø, 4W	15 = 150 kA per phase		
C = 208/120V, 3Ø, 4W	20 = 200 kA per phase	2 = Type 2 SPD (Default)	
W = 220/127V, 3Ø, 4W	25 = 250 kA per phase		
D = 240V, 3Ø, 3W	30 = 300 kA per phase	Includes UL 1283 EMI/RFI Filters	
E = 480/277V, 3Ø, 4W	40 = 400 kA per phase		
F = 480V, 3Ø, 3W	50 = 500 kA per phase	0 = Type 1 SPD	
G = 600V, 3Ø, 3W ^①			
K = 380/220V, 3Ø, 4W			
L = 600/347V, 3Ø, 4W			
S = 400/230V, 3Ø, 4W			
T = 415/240V, 3Ø, 4W			

Example: **TPS4C0620X2** = SPD for a 208/120V panelboard with a surge current capacity of 200kA per phase and Type 2 SPD.

When an option is not selected, include a **zero (0)** in the field.

① Not available in 300, 400 or 500kA versions



TPS4 L6

Ordering Information

Catalog # TPS4 ☐ L6 ☐ ☐ X ☐			
Voltage Code	Surge Current (kA)	Options	
A = 240/120V, 1Ø, 3W	15 = 150 kA per phase	X = Surge counter (Standard)	
B = 240/120V, 3Ø, 4W	30 = 300 kA per phase		
C = 208/120V, 3Ø, 4W	45 = 450 kA per phase	2 = Type 2 SPD (Default)	
W = 220/127V, 3Ø, 4W	55 = 550 kA per phase		
E = 480/277V, 3Ø, 4W	75 = 750 kA per phase	Includes UL 1283 EMI/RFI Filters	
K = 380/220V, 3Ø, 4W			
L = 600/347V, 3Ø, 4W		0 = Type 1 SPD	
S = 400/230V, 3Ø, 4W			
T = 415/240V, 3Ø, 4W			

Example: **TPS4CL620X2** = SPD for a 208/120V panelboard with a surge current capacity of 200kA per phase and Type 2 SPD.

When an option is not selected, include a **zero (0)** in the field.

① Not available in 450, 550 or 750kA versions

SPD - Surge Protective Devices

TPS3 External or Wall Mounted SPDs

Selection

TPS3 09


TPS3 09 is a UL 1449 4th Edition 100 kA Type 1 compact multi-mode surge protective device that can be installed on either the line or load side of the electrical service. When installed at the electrical service entrance, it can be used for UL 96A compliance (@ 20 kA I_n).

TPS3 09 Key Features

- UL 1449 4th Edition Listed Type 1
- Type 1 Rated SPD
- 100 kA Per Phase Surge Current
- 20 kA I_n (Most models)
- 200 kA SCCR (Most models)
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- Every MOV is monitored, including N-G
- Mounts external to electrical distribution equipment
 - Weatherproof hub included
- Mounts internal to P1 panelboards & busway
 - P1 - Field retrofit or factory install
 - P2 and P3 - factory install only
- Standard compact NEMA 4X polycarbonate enclosure
- Modes of Protection: L-N, L-G, N-G, and L-L
- Standard Monitoring: LED Indicators
- Wire Size: Prewired with 3' (91.4 cm) of #10 AWG
- Dimensions: 8.3" x 3.6" x 3.0" (211 mm x 91 mm x 77 mm)
- Weight: 3 lb. (1.4 kg)
- 10 Year Product Warranty

Available Options:

- Dry contacts & Audible Alarm (option "D")
- Extended indicator light (option "E")
- Internal mounting in P1, P2 Panels (option "I"), requires TPS9IKITP1 or TPS9IKITP2 mounting bracket accessory.

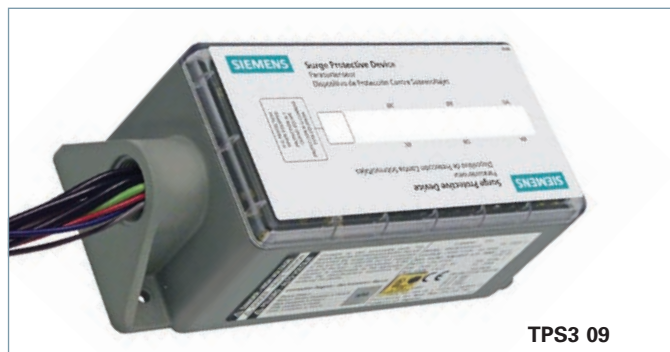

TPS3 09

Ordering Information

Catalog # TPS3 09

Voltage Code	Surge Current (kA)	Options
A = 120/240 V, 1Ø, 3W	10 = 100 kA per phase	E = Extended indicator light
B = 120/240 V, 3Ø, 4W		I = Internal mounting in P1, P2 panels ^①
C = 120/208 V, 3Ø, 4W		D = Dry Contact & audible alarm
D = 240 V, 3Ø, 3W		
E = 277/480 V, 3Ø, 4W		
F = 480 V, 3Ø, 3W		
G = 600 V, 3Ø, 3W		
K = 380/220 V, 3Ø, 4W		
L = 600/347 V, 3Ø, 4W		
S = 400/230 V, 3Ø, 4W		

Example: **TPS3C0910D000**
= Type 1 SPD for a 208/120V panelboard with a surge current capacity of 100 kA per phase with standard NEMA 4X enclosure, dry contacts and audible alarm option.

Available for field retrofit in P1 panels.

When an option is not selected, include a **zero (0)** in the field.

Available Accessories: Ordered Separately

RMSIE = Remote monitor

XMFMKIT = Flush mount plate

TPS9IKITP1 = Mounting bracket for installation in P1 panels

TPS9IKITP2 = Mounting bracket for installation in P2 panels (factory install only)

^① Requires TPS9IKITP1 or TPS9IKITP2 mounting bracket accessory, see available Accessories. Prewired cables are extended from 3 to 6 feet.

SPD - Surge Protective Devices

TPS4 External or Wall Mounted SPDs

Selection

TPS4 09

TPS4 09 is a UL 1449 4th Edition 130 kA Type 1 compact multi-mode surge protective device that can be installed on either the line or load side of the electrical service. When installed at the electrical service entrance, it can be used for UL 96A compliance (@ 20 kA I_n).

TPS4 09 Key Features

- UL 1449 4th Edition Listed Type 1
- Type 1 Rated SPD
- 130 kA Per Phase Surge Current
- 20 kA I_n (Most models)
- 200 kA SCCR
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- Every MOV is monitored, including N-G
- Mounts external to electrical distribution equipment – Weatherproof hub included
- Standard compact NEMA 4X polycarbonate enclosure
- Modes of Protection: L-N, L-G, N-G, and L-L
- Standard Monitoring: LED Indicators
- Wire Size: Prewired with 3' (91.4 cm) of #10 AWG
- Dimensions: 5.02" x 2.93" x 3.25"
- Weight: 1 lb.
- 10 Year Product Warranty

Available Options:

- Dry contacts & Audible Alarm (option "D")



Ordering Information

Catalog #		TPS4	09				
<u>Voltage Code</u>		<u>Surge Current (kA)</u>		<u>Options</u>			
A = 120/240 V, 1Ø, 3W		13 = 130 kA per phase		E = Extended indicator light			
B = 120/240 V, 3Ø, 4W				I = Internal mounting in P1, P2 panels ^①			
C = 120/208 V, 3Ø, 4W				D = Dry Contact & audible alarm			
W = 220/127 V, 3Ø, 4W							
D = 240 V, 3Ø, 3W							
E = 277/480 V, 3Ø, 4W							
F = 480 V, 3Ø, 3W							
G = 600 V, 3Ø, 3W							
K = 380/220 V, 3Ø, 4W							
L = 600/347 V, 3Ø, 4W							
S = 400/230 V, 3Ø, 4W							
T = 415/240 V, 3Ø, 4W							

Available for field retrofit in P1 panels.

When an option is not selected, include a zero (0) in the field.

SPD - Surge Protective Devices

TPS3 External or Wall Mounted SPDs

Selection

TPS3 11

TPS3 11 is a UL 1449 3rd Edition Listed multi-mode Type 1 surge protective device with a per phase surge current capacity that can be increased to 200 kA. In addition, this unit provides UL 1283 listed EMI/RFI or Sine Wave tracking filtering that will condition low energy L-N coupled noise. When installed at the electrical service entrance, it can be used for UL 96A compliance (@ 20 kA I_n).

Standard monitoring includes protection status indication LEDs. Complete protection is intact when the status indicators are illuminated. When protection is lost, the status indicator will extinguish and the red service light will illuminate. An audible alarm and dry contacts are available monitoring options.

A new diagnostic feature integrated within the TPS3 11 is Ground Integrity Monitoring or (GIM) diagnostic indication circuit. Ground Integrity Monitoring or (GIM) diagnostics monitors the health of the electrical system's neutral to ground bond. If voltage is seen across neutral and ground, the phase indicators will remain illuminated, while the red service light begins to flash alerting the end user that the electrical system grounding needs to be checked and serviced. This feature can be remotely monitored when the optional dry contacts are included. Siemens TPS3s are one of the first in the industry to offer this power quality safety and performance indication.

TPS3 11 Key Features

- UL 1449-4 Type 2 SPD and UL 1283 Listed – Optional UL 1449 4th Edition Listed Type 1
- Type 1 / Type 2 SPD
- 100, 150, 200 kA Per Phase Surge Current
- 20 kA I_n (Most models)
- 200 kA SCCR (Most models)
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- Every MOV is monitored, including N-G
- Mounts external to electrical distribution equipment
- Standard NEMA 4X polycarbonate enclosure (UL 746C (f1), UL 94-5VA)
- Modes of Protection: L-N, L-G, N-G, and L-L
- Standard Monitoring: LED Indicators and Ground Integrity Monitoring diagnostics
- Wire size: #8 AWG to #10 AWG
- Dimensions: 6" x 6" x 4" (152 mm x 152 mm x 102 mm)
- Weight: 5 lb. (2.27 kg)
- 10 Year Product Warranty

Available Options:

- Dry contacts & Audible Alarm (option "D")



TPS3 11

Ordering Information

Catalog # TPS3 11				
Voltage Code	Surge Current (kA)	Options		
A = 120/240 V, 1Ø, 3W	10 = 100 kA per phase	2 = Type 2 SPD (Default) Includes UL 1283 EMI/RFI Filters 0 = Type 1 SPD (Consult Factory Prior to Ordering) D = Dry Contacts & audible alarm		
B = 120/240 V, 3Ø, 4W	15 = 150 kA per phase			
C = 120/208 V, 3Ø, 4W	20 = 200 kA per phase			
D = 240 V, 3Ø, 3W				
E = 277/480 V, 3Ø, 4W	Example: TPS3C1110D2 = Type 2 SPD (Default) for a 208/120V application with a surge current capacity of 100 kA per phase, in a standard NEMA 4X enclosure with dry contacts and audible alarm option.			
F = 480 V, 3Ø, 3W	When option D is NOT selected, include a zero (0) in the field.			
G = 600 V, 3Ø, 3W ^①				
K = 380/220 V, 3Ø, 4W				
L = 600/347 V, 3Ø, 4W				
S = 400/230 V, 3Ø, 4W				

Available Accessories: Ordered Separately

RMSIE = Remote monitor

KITFMXF = Flush mount plate

① Available in 100 kA per phase only

SPD - Surge Protective Devices

TPS4 External or Wall Mounted SPDs

NEW

Selection

TPS4 11

TPS4 11 is a UL 1449 5th Edition Listed multi-mode Type 1 surge protective device with a per phase surge current capacity that can be increased to 200 kA. In addition, this unit provides UL 1283 listed EMI/RFI or Sine Wave tracking filtering that will condition low energy L-N coupled noise. When installed at the electrical service entrance, it can be used for UL 96A compliance (@ 20 kA I_n).

Standard monitoring includes protection status indication LEDs. Complete protection is intact when the status indicators are illuminated. When protection is lost, the status indicator will extinguish and the red service light will illuminate. An audible alarm and dry contacts are available monitoring options.

A new diagnostic feature integrated within the TPS4 11 is Ground Integrity Monitoring or (GIM) diagnostic indication circuit. Ground Integrity Monitoring or (GIM) diagnostics monitors the health of the electrical system's neutral to ground bond. If voltage is seen across neutral and ground, the phase indicators will remain illuminated, while the red service light begins to flash alerting the end user that the electrical system grounding needs to be checked and serviced. This feature can be remotely monitored when the optional dry contacts are included. Siemens TPS3s are one of the first in the industry to offer this power quality safety and performance indication.

TPS4 11 Key Features

- UL 1449-4 Type 2 SPD and UL 1283 Listed
 - Optional UL 1449 4th Edition Listed Type 1
- Type 1 / Type 2 SPD
- 100, 150, 200 and 250 kA Per Phase Surge Current
- 20 kA I_n
- 200 kA SCCR (Most models)
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- Every MOV is monitored, including N-G
- Mounts external to electrical distribution equipment
- Standard NEMA 4X polycarbonate enclosure (UL 746C (f1), UL 94-5VA)
- Modes of Protection: L-N, L-G, N-G, and L-L
- Standard Monitoring: LED Indicators and Ground Integrity Monitoring diagnostics
- Wire size: #8 AWG to #10 AWG
- Dimensions: 6.88" x 6.88" x 2.96"
- Weight: 3.5 lb.
- 10 Year Product Warranty

Available Options:

- Dry contacts & Audible Alarm (option "D")



TPS4 11

Ordering Information

Catalog # TPS4 11 			
Voltage Code		Surge Current (kA)	
A = 120/240 V, 1Ø, 3W		10 = 100 kA per phase	
B = 120/240 V, 3Ø, 4W		15 = 150 kA per phase	
C = 120/208 V, 3Ø, 4W		20 = 200 kA per phase	
W = 220/127 V, 3Ø, 4W		25 = 250 kA per phase	
D = 240 V, 3Ø, 3W			
E = 277/480 V, 3Ø, 4W			
F = 480 V, 3Ø, 3W			
G = 600 V, 3Ø, 3W			
K = 380/220 V, 3Ø, 4W			
L = 600/347 V, 3Ø, 4W			
S = 400/230 V, 3Ø, 4W			
T = 415/240 V, 3Ø, 4W			
			Options
			2 = Type 2 SPD (Default) Includes UL 1283 EMI/RFI Filters
			0 = Type 1 SPD (Consult Factory Prior to Ordering)
			D = Dry Contacts & audible alarm

SPD - Surge Protective Devices

TPS3 External or Wall Mounted SPDs

Selection

TPS3 12 and TPS3 L12 (True or Discrete 10-Mode)

TPS3 12 and TPS3 L12 are UL 1449-4 Type 2 and Optional UL 1449 4th Edition surge protective device with a per phase surge current capacity that can be increased to 500 kA (TPS3 L12 up to 450 kA). For mission critical or high profile applications, the TPS3 L12 is our "True" or "Discrete" 10-mode style SPD providing the "Just in Case" assurance of directly connected L-L MOVs.

Both TPS3 12 and TPS3 L12 are UL 1283 Listed incorporating EMI/RFI or Sine Wave tracking filtering designed to condition low energy L-N coupled noise. When installed at the electrical service entrance, it can be used for UL 96A compliance (@ 20 kA In).

Standard monitoring includes protection status indication LEDs, audible alarm, and dry contacts. Complete protection is intact when the status indicators are illuminated. When protection is lost, the status indicator will extinguish, the red service light will illuminate, and the dry contacts will change state. An optional surge counter is available.

A new diagnostic feature integrated within the TPS3 12 and TPS3 L12 is Ground Integrity Monitoring or (GIM) diagnostic indication circuit. Ground Integrity Monitoring or (GIM) diagnostics monitors the health of the electrical system's neutral to ground bond. If voltage is seen across neutral and ground, the phase indicators will remain illuminated, while the red service light begins to flash alerting the end user that the electrical system grounding needs to be checked and serviced. This feature can be remotely monitored via the dry contact outputs. Siemens TPS3s are one of the first in the industry to offer this power quality safety and performance indication.

TPS3 12 and TPS3 L12 Key Features

- UL 1449-4 Type 2 SPD and UL 1283 Listed
 - Optional UL 1449 4th Edition Listed Type 1
- Type 1 / Type 2 SPD
- TPS3 12: 100 – 500 kA Per Phase Surge Current
- TPS3 L12: 150, 300, 450 kA Phase Surge Current
- 20 kA I_n (Most models)
- 200 kA SCCR (Most models)
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- Every MOV is monitored, including N-G
- Mounts external to electrical distribution equipment
 - Recommended for line side or load side applications
- Standard NEMA 1/12/3R/04 ANSI 61 steel enclosure
- TPS3 12 Modes of Protection – L-N, L-G, N-G, and L-L
- TPS3 L12 Modes of Protection – L-N, L-G, N-G, and L-L (directly connected L-L elements)
- Standard Monitoring:
 - LED Indicators
 - Ground Integrity Monitoring diagnostics
 - Dry Contacts
 - Audible alarm with silence switch and test button
- Wire size: #8 AWG to 1/0
- Dimensions: 12" x 12" x 7" (305 mm x 305 mm x 178 mm)®
- Weight: 20 lb. (9.07 kg)®
- 10 Year Product Warranty

Available Options:

- Internal rotary disconnect
- Thru-door disconnect



Ordering Information

Catalog # TPS3 ☐ 12 ☐ ☐ ☐ ☐ ☐ ☐

Voltage Code

A = 120/240 V, 1Ø, 3W
B = 120/240 V, 3Ø, 4W
C = 120/208 V, 3Ø, 4W
D = 240 V, 3Ø, 3W^①
E = 277/480 V, 3Ø, 4W
F = 480 V, 3Ø, 3W^①
G = 600 V, 3Ø, 3W^②
K = 380/220 V, 3Ø, 4W
L = 600/347 V, 3Ø, 4W
S = 400/230 V, 3Ø, 4W

Surge Current (kA)

10 = 100 kA per phase
15 = 150 kA per phase
20 = 200 kA per phase
25 = 250 kA per phase
30 = 300 kA per phase
40 = 400 kA per phase
50 = 500 kA per phase

Enclosure

0 = Standard NEMA 1/12/3R/4 Steel
V = NEMA 4X non-metallic
S = NEMA 4X stainless steel
F = NEMA 1 flush mount
P = NEMA 1 screwcover pullbox with extended display on 6ft cable for line side mounting in SWBD/SWGR

Options

2 = Type 2 SPD (Default)
Includes UL 1283 EMI/RFI Filters
0 = Type 1 SD (Consult Factory Prior to Ordering)
D = Internal rotary disconnect
T = Thru-door disconnect
X = Surge Counter (Standard)

Example: **TPS3C12100XD2** = Type 2 SPD (Default) for a 208/120V application with a surge current capacity of 100kA per phase, in a standard NEMA 1/12/3R/4 enclosure with a surge counter and internal rotary disconnect option.


When option X, T, or D are NOT selected, include a zero (0) in the field.

Available Accessories: Ordered Separately

RMSIE = Remote monitor

① Not available in 500 kA

② Available in 100 kA, 150 kA, 200 kA & 250 kA only



Ordering Information

Catalog # TPS3 ☐ L12 ☐ ☐ ☐ ☐ ☐ ☐

Voltage Code

A = 120/240 V, 1Ø, 3W
B = 120/240 V, 3Ø, 4W
C = 120/208 V, 3Ø, 4W
E = 277/480 V, 3Ø, 4W
K = 380/220 V, 3Ø, 4W
S = 400/230 V, 3Ø, 4W

Surge Current (kA)

15 = 150 kA per phase
30 = 300 kA per phase
45 = 450 kA per phase

Enclosure

0 = Standard NEMA 1/12/3R/4 Steel
V = NEMA 4X non-metallic
S = NEMA 4X stainless steel
F = NEMA 1 flush mount
P = NEMA 1 screwcover pullbox with extended display on 6ft cable for line side mounting in SWBD/SWGR

Options

2 = Type 2 SPD (Default)
Includes UL 1283 EMI/RFI Filters
0 = Type 1 SD (Consult Factory Prior to Ordering)
D = Internal rotary disconnect
T = Thru-door disconnect
X = Surge Counter (Standard)

Example: **TPS3CL12150XD2** = 10 Mode, Type 2 SPD (Default) for a 208/120V application with a surge current capacity of 150kA per phase, in a standard NEMA 1/12/3R/4 enclosure with a surge counter and internal rotary disconnect option.

When an option is NOT selected, include a zero (0) in the field.

Available Accessories: Ordered Separately

RMSIE = Remote monitor

③ Internal disconnect options and other NEMA ratings may increase enclosure size and weight

SPD - Surge Protective Devices

TPS4 External Mounted SPDs **NEW**

Selection

TPS4 12 and TPS4 L12 (True or Discrete 10-Mode)

TPS4 12 and TPS4 L12 are UL 1449-4 Type 2 and Optional UL 1449 4th Edition surge protective device with a per phase surge current capacity that can be increased to 500 kA (TPS4 L12 up to 750 kA). For mission critical or high profile applications, the TPS4 L12 is our "True" or "Discrete" 10-mode style SPD providing the "Just in Case" assurance of directly connected L-L MOVs.

Both TPS4 12 and TPS4 L12 are UL 1283 Listed incorporating EMI/RFI or Sine Wave tracking filtering designed to condition low energy L-N coupled noise. When installed at the electrical service entrance, it can be used for UL 96A compliance (@ 20 kA In).

Standard monitoring includes protection status indication LEDs, audible alarm, and dry contacts. Complete protection is intact when the status indicators are illuminated. When protection is lost, the status indicator will extinguish, the red service light will illuminate, and the dry contacts will change state. An optional surge counter is available.

A new diagnostic feature integrated within the TPS4 12 and TPS4 L12 is Ground Integrity Monitoring or (GIM) diagnostic indication circuit. Ground Integrity Monitoring or (GIM) diagnostics monitors the health of the electrical system's neutral to ground bond. If voltage is seen across neutral and ground, the phase indicators will remain illuminated, while the red service light begins to flash alerting the end user that the electrical system grounding needs to be checked and serviced. This feature can be remotely monitored via the dry contact outputs. Siemens TPSs are one of the first in the industry to offer this power quality safety and performance indication.

TPS4 12 and TPS4 L12 Key Features

- UL 1449-4 Type 2 SPD and UL 1283 Listed
 - Optional UL 1449 4th Edition Listed Type 1
- Type 1 / Type 2 SPD
- TPS4 12: 100 – 500 kA Per Phase Surge Current
- TPS4 L12: 150, 300, 450, 550, 750 kA Phase Surge Current
- 20 kA I_n (Most models)
- 200 kA SCCR (Most models)
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- Every MOV is monitored, including N-G
- Mounts external to electrical distribution equipment
 - Recommended for line side or load side applications
- Standard NEMA 1/12/3R/04 ANSI 61 steel enclosure
- TPS4 12 Modes of Protection – L-N, L-G, N-G, and L-L
- TPS4 L12 Modes of Protection – L-N, L-G, N-G, and L-L (directly connected L-L elements)
- Standard Monitoring:
 - LED Indicators
 - Ground Integrity Monitoring diagnostics
 - Dry Contacts
 - Event counter with time and date stamp
 - Audible alarm with silence switch and test button
- Wire size: #8 AWG to 1/0
- Dims: 12" x 12" x 8.5" (305 mm x 305 mm x 216 mm)^③
- Weight: 16.5 lbs (7484 g)^③
- 10 Year Product Warranty

Available Options:

- Internal rotary disconnect
- Thru-door disconnect
- Flush kits available as accessory



TPS4 12


Ordering Information

Catalog # TPS4 ☐ 12 ☐ ☐ ☐ X ☐ ☐

Voltage Code	Surge Current (kA)	Enclosure
A = 240/120 V, 1Ø, 3W ^①	10 = 100 kA per phase	0 = Standard NEMA 4 metallic
B = 240/120 V, 3Ø, 4W	15 = 150 kA per phase	S = NEMA 4X stainless steel
C = 208/120 V, 3Ø, 4W	20 = 200 kA per phase	V = NEMA 4X non-metallic
W = 220/127 V, 3Ø, 4W	25 = 250 kA per phase	Options 1 alpha numeric character
D = 240 V, 3Ø, 3W	30 = 300 kA per phase	X = Surge counter (standard)
E = 480/277 V, 3Ø, 4W	40 = 400 kA per phase	D = Internal disconnect (default)
F = 480 V, 3Ø, 3W	50 = 500 kA per phase	T = Thru-door disconnect
G = 600 V, 3Ø, 3W ^①		2 = Type 2 SPD (default) includes UL 1283 EMI/RFI Filters
K = 380/220 V, 3Ø, 4W		0 = NEMA 4X stainless steel
L = 600/347 V, 3Ø, 4W		
S = 400/230 V, 3Ø, 4W		
T = 415/240 V, 3Ø, 4W		

Example: **TPS4C12200XD2** = a Type 2 SPD for a 208/120V application with a surge current capacity of 200kA per phase, in a standard NEMA 4 enclosure with a surge counter and internal rotary disconnect option.

- ① Not available in 300, 400 or 500kA
 ② Can also be used on 208Y/120V 1Ø, 3W System



TPS4 L12

Ordering Information

Catalog # TPS4 ☐ L12 ☐ ☐ ☐ X ☐ ☐

Voltage Code	Surge Current (kA)	Enclosure
A = 240/120 V, 1Ø, 3W ^①	10 = 100 kA per phase	0 = Standard NEMA 4 metallic
B = 240/120 V, 3Ø, 4W	30 = 300 kA per phase	S = NEMA 4X stainless steel
C = 208/120 V, 3Ø, 4W	45 = 450 kA per phase	V = NEMA 4X non-metallic
W = 220/127 V, 3Ø, 4W	55 = 550 kA per phase	Options 1 alpha numeric character
E = 480/277 V, 3Ø, 3W	75 = 750 kA per phase	X = Surge counter (standard)
K = 380/220 V, 3Ø, 4W		D = Internal disconnect (default)
L = 600/347 V, 3Ø, 4W ^①		T = Thru-door disconnect
S = 400/230 V, 3Ø, 4W		2 = Type 2 SPD (default) includes UL 1283 EMI/RFI Filters
T = 415/240 V, 3Ø, 4W		0 = NEMA 4X stainless steel

Example: **TPS4CL12300XT2** = a Type 2 SPD for a 208/120V application with a surge current capacity of 300kA per phase, in a standard NEMA 4 enclosure with a surge counter and thru-door disconnect.

- ① Not available in 450, 550 or 750kA
 ② Can also be used on 208Y/120V 1Ø, 3W System
 ③ Internal disconnect options and other NEMA ratings may increase enclosure size and weight

SPD - Surge Protective Devices

TPS4 External or Wall Mounted SPDs

NEW

Selection

TPS4 13

TPS4 13 is an UL 1449-4 Type 2 and Optional UL 1449 5th Edition surge protective device with a per phase surge current capacity that can be increased to 400 kA.

TPS4 13 is UL 1283 Listed incorporating EMI/RFI or Sine Wave tracking filtering designed to condition low energy L-N coupled noise. When installed at the electrical service entrance, it can be used for UL 96A compliance (@ 20 kA In).

Standard monitoring includes protection status indication LEDs, audible alarm, and dry contacts. Complete protection is intact when the status indicators are illuminated. When protection is lost, the status indicator will extinguish, the red service light will illuminate, and the dry contacts will change state. A standard surge counter is included with time/date stamp.

TPS4 13 Key Features

- UL 1449-4 Type 2 SPD and UL 1283 Listed
 - Optional UL 1449 4th Edition Listed Type 1
- Type 1 / Type 2 SPD
- TPS4 13: 100 – 400 kA Per Phase Surge Current
- 20 kA I_n
- 200 kA SCCR
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- Every MOV is monitored, including N-G
- Mounts external to electrical distribution equipment
 - Recommended for line side or load side applications
- NEMA 4 Aluminum enclosure
- TPS4 13 Modes of Protection – L-N, L-G, N-G, and L-L
- Standard Monitoring:
 - LED Indicators
 - Ground Integrity Monitoring diagnostics
 - Dry Contacts
 - Audible alarm with silence switch and test button
- Pre-wired with #10 AWG
- Dimensions: 9.35" x 8.14" x 3.25"
- Weight: 5.4 lb.
- 10 Year Product Warranty



TPS4 13

Ordering Information

Catalog # TPS4 ☐ 13 ☐ ☐ ☐ ☐ ☐			
Voltage Code	Surge Current (kA)	Enclosure	Options
A = 120/240 V, 1Ø, 3W	10 = 100 kA per phase	0 = No Enclosure (Standard)	2 = Type 2 SPD (Default) Includes UL 1283 EMI/RFI Filters
B = 120/240 V, 3Ø, 4W	15 = 150 kA per phase		0 = Type 1 SD (Consult Factory Prior to Ordering)
C = 120/208 V, 3Ø, 4W	20 = 200 kA per phase		X = Surge Counter (Standard)
W = 220/127 V, 3Ø, 4W	25 = 250 kA per phase		
D = 240 V, 3Ø, 3W	30 = 300 kA per phase		
E = 277/480 V, 3Ø, 4W	40 = 400 kA per phase		
F = 480 V, 3Ø, 3W			
G = 600 V, 3Ø, 3W			
K = 380/220 V, 3Ø, 4W			
L = 600/347 V, 3Ø, 4W			
S = 400/230 V, 3Ø, 4W			
T = 415/240 V, 3Ø, 4W			

SPD - Surge Protective Devices

TPS3 External or Wall Mounted SPDs

Selection

TPS3 15 and TPS3 L15 (True or Discrete 10-Mode)

TPS3 15 and TPS3 L15 are UL 1449-4 Type 2 and Optional UL 1449 4th Edition surge protective device with a per phase surge current capacity that can be increased to 1000 kA (TPS3 L15 up to 900 kA). For mission critical or high profile applications, the TPS3 L15 is our "True" or "Discrete" 10-mode style SPD providing the "Just in Case" assurance of directly connected L-L MOVs.

Both TPS3 15 and TPS3 L15 are UL 1283 Listed incorporating EMI/RFI or Sine Wave tracking filtering designed to condition low energy L-N coupled noise. When installed at the electrical service entrance, it can be used for UL 96A compliance (@ 20 kA I_N).

Standard monitoring includes protection status indication LEDs, audible alarm, and dry contacts. Complete protection is intact when the status indicators are illuminated. When protection is lost, the status indicator will extinguish, the red service light will illuminate, and the dry contacts will change state. An optional surge counter is available.

A new diagnostic feature integrated within the TPS3 15 and TPS3 L15 is Ground Integrity Monitoring or (GIM) diagnostic indication circuit. Ground Integrity Monitoring or (GIM) diagnostics monitors the health of the electrical system's neutral to ground bond. If voltage is seen across neutral and ground, the phase indicators will remain illuminated, while the red service light begins to flash alerting the end user that the electrical system grounding needs to be checked and serviced. This feature can be remotely monitored via the dry contact outputs. Siemens TPS3s are one of the first in the industry to offer this power quality safety and performance indication.

TPS3 15 and TPS3 L15 Key Features

- UL 1449-4 and UL 1283 Listed
 - Optional UL 1449 4th Edition Listed Type 1
- Type 1 / Type 2 SPD
- TPS3 15: 400 – 1000 kA Per Phase Surge Current
- TPS3 L15: 600 and 900 kA Phase Surge Current
- 20 kA I_N (Most models)
- 200 kA SCCR (Most models)
- UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
- Every MOV is monitored, including N-G
- Mounts external to electrical distribution equipment
 - Recommended for line side or load side applications
- Standard NEMA 1/12/3R/04 ANSI 61 steel enclosure
- TPS3 15 Modes of Protection – L-N, L-G, N-G, and L-L
- TPS3 L15 Modes of Protection – L-N, L-G, N-G, and L-L (directly connected L-L elements)
- Internal rotary disconnect switch included
- Standard Monitoring:
 - LED Indicators
 - Ground Integrity Monitoring diagnostics
 - Dry Contacts
 - Audible alarm with silence switch and test button
- Wire size: #8 AWG to 1/0
- Dimensions: 20" x 20" x 7" (508 mm x 508 mm x 178 mm)^④
- Weight: 64 lb. (29 kg)^④
- 10 Year Product Warranty

Available Options:

- Thru-door disconnect



Ordering Information

Catalog # TPS3 ☐ 15 ☐ ☐ ☐ ☐ ☐				
Voltage Code	Surge Current (kA)	Enclosure	Options	
A = 120/240 V, 10, 3W	40 = 400 kA per phase ^①	0 = Standard NEMA 1/12/3R/4 Steel	2 = Type 2 SPD (Default)	Includes UL 1283 EMI/RFI Filters
B = 120/240 V, 30, 4W	50 = 500 kA per phase ^①	V = NEMA 4X non-metallic	0 = Type 1 SD (Consult Factory Prior to Ordering)	
C = 120/208 V, 30, 4W	60 = 600 kA per phase	S = NEMA 4X stainless steel	T = Thru-door disconnect	
D = 240 V, 30, 3W ^②	80 = 800 kA per phase	F = NEMA 1 flush mount	X = Surge Counter (Standard)	
E = 277/480 V, 30, 4W	1K = 1000 kA per phase	P = NEMA 1 screwcover pullbox with extended display on 5ft cable for line side mounting in SWBD/SWGR		
F = 480 V, 30, 3W ^③				
G = 600 V, 30, 3W ^③				
K = 380/220 V, 30, 4W				
L = 600/347 V, 30, 4W				
S = 400/230 V, 30, 4W				


Example: **TPS3C1560SX02** = Type 2 SPD (Default) for a 208/120V application with a surge current capacity of 600 kA per phase, in a NEMA 4X stainless steel enclosure with a surge counter and standard disconnect switch.

When an option is NOT selected, include a **zero (0)** in the field.

Available Accessories: Ordered Separately

RMSIE = Remote monitor

- ① Available in G voltage code only
- ② Available in 600 kA & 800 kA only
- ③ Available in 400 kA & 500 kA only



Ordering Information

Catalog # TPS3 ☐ L15 ☐ ☐ ☐ ☐ ☐				
Voltage Code	Surge Current (kA)	Enclosure	Options	
A = 120/240 V, 10, 3W	60 = 600 kA per phase	0 = Standard NEMA 1/12/3R/4 Steel	2 = Type 2 SPD (Default)	Includes UL 1283 EMI/RFI Filters
B = 120/240 V, 30, 4W	90 = 900 kA per phase	V = NEMA 4X non-metallic	0 = Type 1 SD (Consult Factory Prior to Ordering)	
C = 120/208 V, 30, 4W		S = NEMA 4X stainless steel	T = Thru-door disconnect	
E = 277/480 V, 30, 4W		F = NEMA 1 flush mount	X = Surge Counter (Standard)	
K = 380/220 V, 30, 4W		P = NEMA 1 screwcover pullbox with extended display on 5ft cable for line side mounting in SWBD/SWGR		
S = 400/230 V, 30, 4W				

Example: **TPS3CL15600X02** = 10 Mode, Type 2 SPD (Default) for a 208/120V application with a surge current capacity of 600 kA per phase, in a standard NEMA 1/12/3R/4 enclosure with a surge counter.

When an option is NOT selected, include a **zero (0)** in the field.

Available Accessories: Ordered Separately

RMSIE = Remote monitor

④ Other NEMA ratings may increase enclosure size and weight.

SPD - Surge Protective Devices

TPS4 External Mounted SPDs **NEW**

Selection

TPS4 15 and TPS4 L15 (True or Discrete 10-Mode)

TPS4 15 and TPS4 L15 are UL 1449-4 Type 2 and Optional UL 1449 4th Edition surge protective device with a per phase surge current capacity that can be increased to 1000 kA (TPS4 L15 up to 900 kA). For mission critical or high profile applications, the TPS4 L15 is our "True" or "Discrete" 10-mode style SPD providing the "Just in Case" assurance of directly connected L-L MOVs.


Both TPS4 15 and TPS4 L15 are UL 1283 Listed incorporating EMI/RFI or Sine Wave tracking filtering designed to condition low energy L-N coupled noise. When installed at the electrical service entrance, it can be used for UL 96A compliance (@ 20 kA I_n).

Standard monitoring includes protection status indication LEDs, audible alarm, and dry contacts. Complete protection is intact when the status indicators are illuminated. When protection is lost, the status indicator will extinguish, the red service light will illuminate, and the dry contacts will change state. An optional surge counter is available.

A new diagnostic feature integrated within the TPS4 15 and TPS4 L15 is Ground Integrity Monitoring or (GIM) diagnostic indication circuit. Ground Integrity Monitoring or (GIM) diagnostics monitors the health of the electrical system's neutral to ground bond. If voltage is seen across neutral and ground, the phase indicators will remain illuminated, while the red service light begins to flash alerting the end user that the electrical system grounding needs to be checked and serviced. This feature can be remotely monitored via the dry contact outputs. Siemens TPSs are one of the first in the industry to offer this power quality safety and performance indication.

TPS4 15 and TPS4 L15 Key Features

- UL 1449-4 and UL 1283 Listed
 - Optional UL 1449 4th Edition Listed Type 1
 - Type 1 / Type 2 SPD
 - TPS4 15: 400 – 1000 kA Per Phase Surge Current
 - TPS4 L15: 600 and 900 kA Phase Surge Current
 - 20 kA I_n (Most models)
 - 200 kA SCCR (Most models)
 - UL 96A Lightning Protection Master Labeling compliant (@ 20 kA)
 - Every MOV is monitored, including N-G
 - Mounts external to electrical distribution equipment
 - Recommended for line side or load side applications
 - Standard NEMA 1/12/3R/04 ANSI 61 steel enclosure
 - TPS4 15 Modes of Protection – L-N, L-G, N-G, and L-L
 - TPS4 L15 Modes of Protection – L-N, L-G, N-G, and L-L (directly connected L-L elements)
 - Internal rotary disconnect switch included
 - Standard Monitoring:
 - LED Indicators
 - Ground Integrity Monitoring diagnostics
 - Dry Contacts
 - Audible alarm with silence switch and test button
 - Event counter with time and date stamp
 - Wire size: #8 AWG to 1/0
 - Dimensions: 12" x 12" x 8.5" (305 mm x 305 mm x 216 mm)^②
 - Weight: 24.5 lb. (11,113 g)^②
 - 10 Year Product Warranty
 - Thru-door disconnect (default)
- Available Options:**
- Flush kits available as accessory

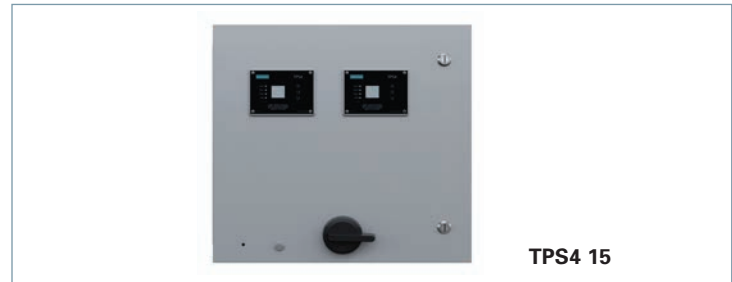

Ordering Information

Catalog # TPS4 ☐ 15 ☐ ☐ ☐ X ☐ ☐

Voltage Code

A = 240/120 V, 1Ø, 3W^①
 B = 240/120 V, 3Ø, 4W
 C = 208/120 V, 3Ø, 4W
 W = 220/127 V, 3Ø, 4W
 D = 240 V, 3Ø, 3W
 E = 480/277 V, 3Ø, 4W
 F = 480 V, 3Ø, 3W
 G = 600 V, 3Ø, 3W
 K = 380/220 V, 3Ø, 4W
 L = 600/347 V, 3Ø, 4W
 S = 400/230 V, 3Ø, 4W
 T = 415/240 V, 3Ø, 4W

Surge Current (kA)

60 = 300 kA per phase
 80 = 400 kA per phase
 1K = 1000 kA per phase

Enclosure


0 = Standard NEMA 4 metallic
 S = NEMA 4X stainless steel
 V = NEMA 4X non-metallic

Options 1 alpha numeric character

X = Surge counter (standard)
 T = Thru-door disconnect (default)
 2 = Type 2 SPD (default) includes UL 1283 EMI/RFI Filters
 0 = NEMA 4X stainless steel

Example: **TPS4C15800XT2** = a Type 2 SPD for a 208/120V application with a surge current capacity of 800kA per phase, in a standard NEMA 4 enclosure with a surge counter and thru-door disconnect.

^① Can also be used on 208Y/120V 1Ø, 3W System



Ordering Information

Catalog # TPS4 ☐ L15 ☐ ☐ ☐ X ☐ ☐

Voltage Code

A = 240/120 V, 1Ø, 3W^①
 B = 240/120 V, 3Ø, 4W
 C = 208/120 V, 3Ø, 4W
 W = 220/127 V, 3Ø, 4W
 E = 480/277 V, 3Ø, 3W
 K = 380/220 V, 3Ø, 4W
 L = 600/347 V, 3Ø, 4W
 S = 400/230 V, 3Ø, 4W
 T = 415/240 V, 3Ø, 4W

Surge Current (kA)

60 = 600 kA per phase
 90 = 900 kA per phase

Enclosure

0 = Standard NEMA 4 metallic
 S = NEMA 4X stainless steel
 V = NEMA 4X non-metallic

Options 1 alpha numeric character

X = Surge counter (standard)
 T = Thru-door disconnect (default)
 2 = Type 2 SPD (default) includes UL 1283 EMI/RFI Filters
 0 = NEMA 4X stainless steel

Example: **TPS4CL15900XT2** = a Type 2 SPD for a 208/120V application with a surge current capacity of 900kA per phase, in a standard NEMA 4 enclosure with a surge counter and thru-door disconnect.

^① Can also be used on 208Y/120V 1Ø, 3W System

^② Other NEMA ratings may increase enclosure size and weight.

Frequently Asked Questions

What is a surge protective device or SPD?

A Surge Protective Device is a device that attenuates (reduces in magnitude) random, high energy, short duration overvoltages caused by lightning, utilities, switching, etc. Such anomalies occur in the form of voltage and current spikes with a duration of less than half an ac voltage cycle. These high energy power spikes can damage sensitive electronic equipment, such as computers, instrumentation, and process controllers.

How do SPDs work?

Surge Suppressors divert high energy power away from a load by providing a lower impedance path to common point earth ground. This is similar in concept to pressure relief valves that protect water heaters from overpressure. Surge suppressors used most often for protection of AC Power have metal oxide varistors (MOVs) connected in parallel.

Where are SPDs installed?

AC voltage surge suppressors are typically installed in these three areas: at a utility service entrance for protection of an entire facility, in distribution panelboards and switchboards for protection of sensitive downstream loads; connected to a wall outlet for individual protection of a specific piece of equipment, such as a computer or solid-state controller.

What is clamping voltage?

Clamping voltage, also referred to as peak let through or suppressed voltage rating, is the amount of voltage a surge suppressor permits to pass through it to the attached load during a transient event. Clamping voltage is a performance measurement of a surge suppressor's ability to attenuate a transient. For example, a surge suppressor might limit a 6,000V surge so that only 700V is 'visible' to the load. The Voltage Protection Rating is 700V, commonly called Clamping Voltage. This performance value is confirmed by Underwriters Laboratories during tests conducted while evaluating a surge suppressor for listing.

What is surge current capacity?

Surge current capacity is the maximum amount of surge current that a surge suppressor can pass for a single transient event. This level is used to indicate the protection capacity of a particular surge suppressor design, and when specifying surge suppressors. For example, in a high exposure application with very large transients present from lightning, a higher level surge current capacity might be desired. Be aware that surges have natural limitations and that larger surge current capacity tends to add redundancy rather than the implied ability to handle an extremely large surge. For

example, an entire lightning strike cannot go through wire; it is much like trying to put the output from a fire hose through a soda straw. Consequently, suppressors do not need to be sized for entire lightning strikes. There are valid reasons for adding excess surge current capacity for redundancy reasons.

What types of components make up a SPD?

The device most commonly used in AC voltage surge suppressors are MOVs, a solid-state device made of zinc oxide materials. MOVs are voltage sensitive semiconductors, which change from high impedance to low impedance when sensing an overvoltage condition. MOVs are packaged for specific voltages and current handling capacities. Other devices (more typically found in DC applications) include single junction diodes and gas tubes that ionize at preset voltages.

What features should be considered when selecting SPDs?

Two important areas to consider during the selection of a surge suppressor are performance and safety, and include the following criteria: Performance: 1) surge current capacity; and 2) clamping voltage. Safety: 1) the individual suppression circuit should be fused to clear an inoperative MOV during an extreme transient event, and 2) provide overcurrent protection for the surge suppressor during a fault condition.

What surge current capacity is required?

Surge current capacity is dependent on the application and the amount of required protection. The selection of the proper surge suppressor is not an exact science and cannot be scientifically calculated from a standard algorithm.

Questions to consider when specifying the proper surge current capacity for a surge suppressor include:

- What is the geographic location of the facility and it's susceptibility to lightning? (For example, Florida is a high-lightning area; California is a low lightning area.)
- Is the facility in a rural or urban setting?
- Is the facility the tallest building around?
- Is the facility at the end of the utility grid?
- If it is an existing facility, what is its power quality history?

Based on the above information, and taking into account the cost of protection, the following is a good rule of thumb: a surge suppressor with a surge current capacity in the range of 100kA to 300kA would be used in conjunction with a service entrance panelboard or switchboard. A surge suppressor with a surge current capacity in the range of 100kA to 200kA would be used in conjunction with a downstream panelboard

SPD - Surge Protective Devices

Notes