



Data sheet for SINAMICS G130

MLFB-Ordering data: **6SL3310-1GH34-1AA3**

Client order no.:
Order no.:
Offer no.:
Remarks:

Item no.:
Consignment no.:
Project:

Rated data

Input

Supply frequency	47...63 Hz
Supply voltage	690 V ±10%
Rated input current	426 A
Max. current	655 A
Pulse number	6
Energy recovery capability	No (2Q)

Output:

Output voltage	690 V
Rated power (LO) in kW	400 kW
Rated power (HO) in kW	315 kW
Rated output current	410 A
Rated output current (LO)	400 A
Rated output current (HO)	367 A
Output current Max	600 A
Pulse frequency (factory setting)	1.25 kHz

Basic data:


Power losses ΔP	7.43 kW
Sound pressure level L_{pA} (1 m)	70 dB
Conductor cross section, max. (IEC)	4 x 240 mm ²
Degree of protection	IP00
Dimensions (H x W x D)	1506 mm x 503 mm x 540 mm
Weight approx.	294 kg
Frame size	HX

Environmental conditions

Installation altitude	1000 m
Coolant	Air
Coolant requirement, air	0.78 m ³ /s
Ambient temperature	0 °C - +40 °C

Converter losses to IEC61800-9-2*

Efficiency class **IE2**
Comparison with the reference converter (90% / 100%) **37.2 %**

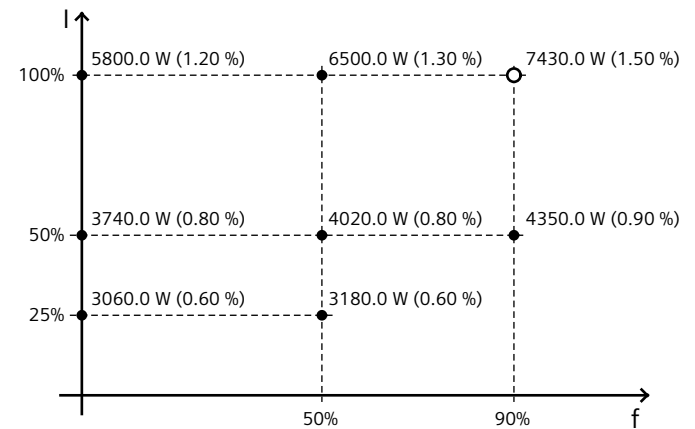

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

Special design

Supplementary system components

6SL30401GA011AA0 - Control Unit Kit CU320-2 PN (PROFINET, EtherNet/IP)