

Duplex starter W/O alternator Size 3.5 Three phase full voltage Solid-state overload relay OLRelay amp range 50-200A Combination type Two 200A disconnect switches Encl NEMA type 4 painted steel Water/dust tight weather proof



Figure similar

|                         |   |
|-------------------------|---|
| Product brand name      | Class 84  |
| Design of the product   | Duplex controller with two non-fusible disconnect switches without alternator |
| Special product feature | ESP200 overload relay; Half-size controller                                   |

| General technical data                                       |                          |
|--|--------------------------|
| Weight [lb]  | 106 lb                   |
| Height x Width x Depth [in]                                  | 56 x 29 x 10 in          |
| Protection against electrical shock                          | NA for enclosed products |
| Installation altitude [ft] at height above sea level maximum | 6560 ft                  |
| Ambient temperature [°F]                                     |                          |
| • during storage maximum                                     | 149 °F                   |
| • during operation maximum                                   | 104 °F                   |
| Ambient temperature  |                          |
| • during storage maximum                                     | 65 °C                    |
| • during operation maximum                                   | 40 °C                    |
| Country of origin  | USA                      |

## Horsepower ratings

Yielded mechanical performance [hp] for three-phase AC motor

- |                            |       |
|----------------------------|-------|
| • at 200/208 V rated value | 30 hp |
| • at 220/230 V rated value | 40 hp |
| • at 460/480 V rated value | 75 hp |
| • at 575/600 V rated value | 75 hp |

## Contactors

|                   |                            |
|-------------------|----------------------------|
| Size of contactor | Controller half size 3 1/2 |
|-------------------|----------------------------|

|   |   |
|---|---|
| Number of NO contacts for main contacts | 3 |
|---|---|

|   |       |
|---|-------|
| Operating voltage for main current circuit at AC at 60 Hz maximum | 600 V |
|---|-------|

|  |       |
|--|-------|
| Operating current at AC at 600 V rated value | 115 A |
|--|-------|

|   |         |
|---|---------|
| Mechanical service life (switching cycles) of the main contacts typical | 5000000 |
|---|---------|

## Auxiliary contact

|   |   |
|---|---|
| Number of NC contacts at contactor for auxiliary contacts | 0 |
|---|---|

|   |   |
|---|---|
| Number of NO contacts at contactor for auxiliary contacts | 1 |
|---|---|

|  |   |
|--|---|
| Number of total auxiliary contacts maximum | 7 |
|--|---|

|   |                                     |
|---|-------------------------------------|
| Contact rating of auxiliary contacts of contactor according to UL | 10A@600VAC (A600), 5A@600VDC (P600) |
|---|-------------------------------------|

## Coil

|   |    |
|---|----|
| Type of voltage of the control supply voltage | AC |
|---|----|

|                        |  |
|------------------------|--|
| Control supply voltage |  |
|------------------------|--|

- |                              |               |
|------------------------------|---------------|
| • at DC rated value          | 0 ... 0 V     |
| • at AC at 50 Hz rated value | 190 ... 220 V |
| • at AC at 60 Hz rated value | 220 ... 240 V |

|                             |      |
|-----------------------------|------|
| Holding power at AC minimum | 14 W |
|-----------------------------|------|

|   |         |
|---|---------|
| Apparent pick-up power of magnet coil at AC | 310 V·A |
|---|---------|

|   |        |
|---|--------|
| Apparent holding power of magnet coil at AC | 26 V·A |
|---|--------|

|  |              |
|--|--------------|
| Operating range factor control supply voltage rated value of magnet coil | 0.85 ... 1.1 |
|--|--------------|

|  |      |
|--|------|
| Percental drop-out voltage of magnet coil related to the input voltage | 50 % |
|--|------|

|                      |              |
|----------------------|--------------|
| Switch-on delay time | 26 ... 41 ms |
|----------------------|--------------|

|                |              |
|----------------|--------------|
| Off-delay time | 14 ... 19 ms |
|----------------|--------------|

## Overload relay

|                  |  |
|------------------|--|
| Product function |  |
|------------------|--|

- |                           |     |
|---------------------------|-----|
| • Overload protection     | Yes |
| • Phase failure detection | Yes |

|  |   |
|--|---|
| • Phase unbalance  | Yes   |
| • Ground fault detection   | Yes   |
| • Test function  | Yes   |
| • External reset   | Yes   |
| Reset function   | Manual, automatic and remote  |
| Trip class   | Class 5 / 10 / 20 (factory set) / 30  |
| Adjustable pick-up value current of the current-dependent overload release | 50 ... 200 A  |
| Trip time at phase-loss maximum  | 3 s   |
| Relative repeat accuracy   | 1 %   |
| Number of NC contacts of auxiliary contacts of overload relay              | 1   |
| Number of NO contacts of auxiliary contacts of overload relay              | 1   |
| Operating current of auxiliary contacts of overload relay                  | <ul style="list-style-type: none"> <li>• at AC at 600 V 5 A</li> <li>• at DC at 250 V 1 A</li> </ul>  |
| Contact rating of auxiliary contacts of overload relay according to UL     | 5A@600VAC (B600), 1A@250VDC (R300)  |
| Insulation voltage   | <ul style="list-style-type: none"> <li>• with single-phase operation at AC rated value 600 V</li> <li>• with multi-phase operation at AC rated value 300 V</li> </ul> |

#### Disconnect Switch

|  |             |
|--|-------------|
| Rated response values of switch disconnecter | 200A / 600V |
| Design of fuse holder                        | non-fusible |
| Operating class of the fuse link             | non-fusible |

#### Enclosure

|   |  |
|---|--|
| Degree of protection NEMA rating of the enclosure | NEMA Type 4                            |
| Design of the housing                             | Dust-tight, watertight & weather proof |

#### Mounting/wiring

|  |                                   |
|--|-----------------------------------|
| Mounting position  | Vertical                          |
| Mounting type  | Surface mounting and installation |
| Type of electrical connection for supply voltage line-side   | Box lug                           |
| Tightening torque [lbf·in] for supply  | 275 ... 275 lbf·in                |
| Type of connectable conductor cross-sections at line-side at AWG conductors single or multi-stranded | 1x (6 AWG ... 300 Kcmil)          |
| Temperature of the conductor for supply maximum permissible  | 75 °C                             |
| Material of the conductor for supply   | AL or CU                          |
| Type of electrical connection for load-side outgoing feeder  | Box lug                           |

|  |   |
|--|---|
| Tightening torque [lbf·in] for load-side outgoing feeder   | 120 ... 120 lbf·in                                  |
| Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder single or multi-stranded            | 1x (14 ... 2/0 AWG)                                 |
| Temperature of the conductor for load-side outgoing feeder maximum permissible   | 75 °C   |
| Material of the conductor for load-side outgoing feeder  | AL or CU  |
| Type of electrical connection of magnet coil   | Screw-type terminals                                |
| Tightening torque [lbf·in] at magnet coil  | 5 ... 12 lbf·in                                     |
| Type of connectable conductor cross-sections of magnet coil at AWG conductors single or multi-stranded                           | 2x (16 ... 12 AWG)                                  |
| Temperature of the conductor at magnet coil maximum permissible  | 75 °C   |
| Material of the conductor at magnet coil   | CU  |
| Type of electrical connection at contactor for auxiliary contacts  | Screw-type terminals                                |
| Tightening torque [lbf·in] at contactor for auxiliary contacts   | 10 ... 15 lbf·in                                    |
| Type of connectable conductor cross-sections at contactor at AWG conductors for auxiliary contacts single or multi-stranded      | 1x (12 AWG), 2x (16 ... 14 AWG), 2x (18 ... 16 AWG) |
| Temperature of the conductor at contactor for auxiliary contacts maximum permissible   | 75 °C   |
| Material of the conductor at contactor for auxiliary contacts  | CU  |
| Type of electrical connection at overload relay for auxiliary contacts   | Screw-type terminals                                |
| Tightening torque [lbf·in] at overload relay for auxiliary contacts  | 7 ... 10 lbf·in                                     |
| Type of connectable conductor cross-sections at overload relay at AWG conductors for auxiliary contacts single or multi-stranded | 2x (20 ... 14 AWG)                                  |
| Temperature of the conductor at overload relay for auxiliary contacts maximum permissible  | 75 °C   |
| Material of the conductor at overload relay for auxiliary contacts   | CU  |

#### Short-circuit current rating

|   |   |
|---|---|
| Design of the fuse link for short-circuit protection of the main circuit required | 10kA@600V (Class H or K); 100kA@600V (Class R or J) |
| Certificate of suitability  | NEMA ICS 2; UL 508; CSA 22.2, No.14                 |

#### Further information

**Industrial Controls - Product Overview (Catalogs, Brochures,...)**  
[www.usa.siemens.com/iccatalog](http://www.usa.siemens.com/iccatalog)

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:84IUH95EDG>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/US/en/ps/US2:84IUH95EDG>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=US2:84IUH95EDG&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:84IUH95EDG&lang=en)


**Certificates/approvals**

<https://support.industry.siemens.com/cs/US/en/ps/US2:84IUH95EDG/certificate>

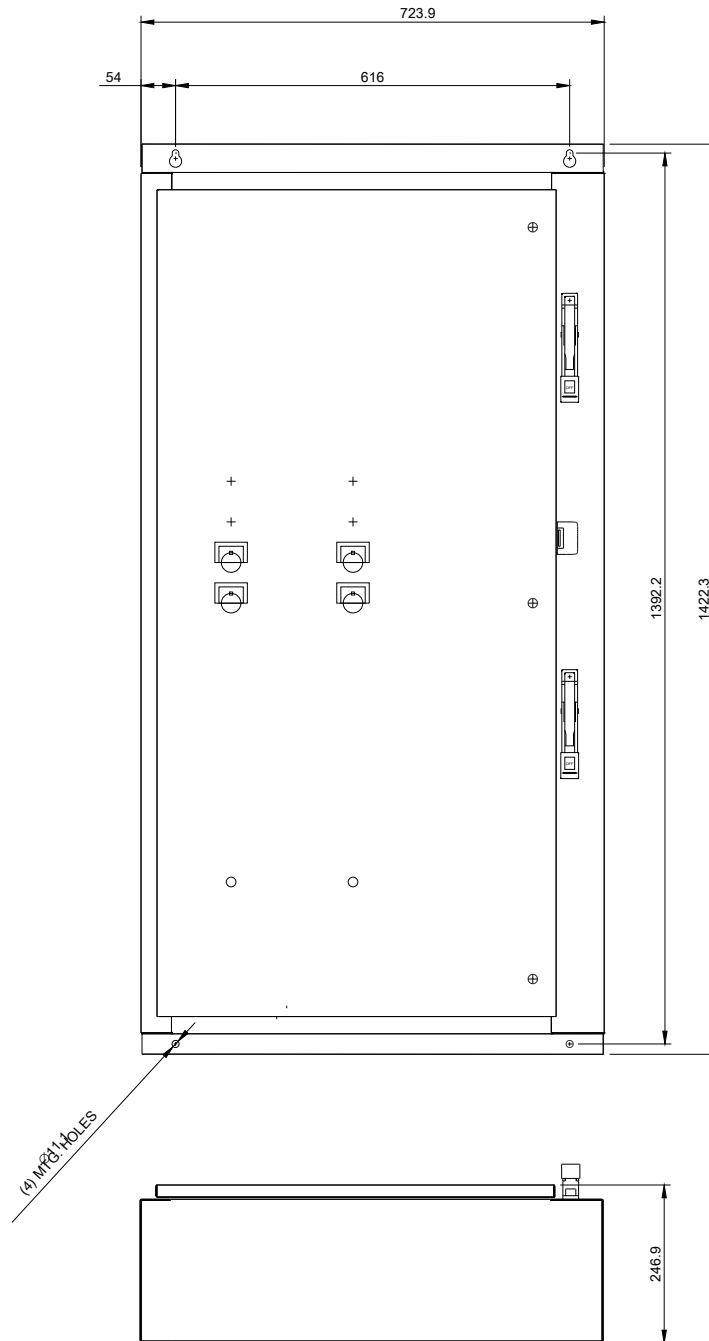

# %%USCHEMATIC DIAGRAM

Class 83 & 84 Duplex W/Manual Alternation Size 0-4

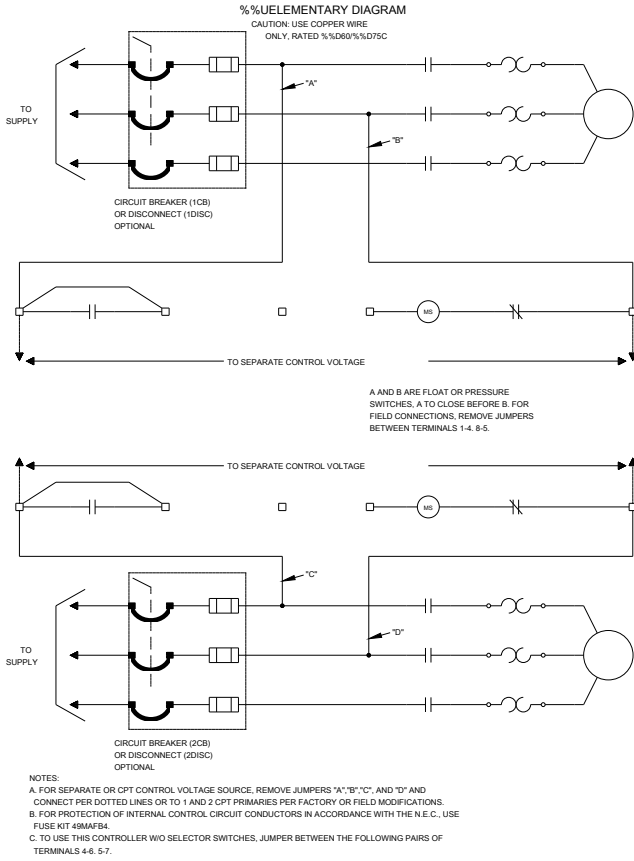

D68077003

last modified:

11/15/2019