






Device Adapter S00, S0, 32A, 200 x 45 mm, for 60mm busbar system for use with connector 3RV29 with screwless electrical contact

number of mounting rails	1
Connections	
type of electrical connection	plug-in contact
Mechanical Design	
height	200 mm
width of the adapter	45 mm
depth	80 mm
thickness of the busbar	
• minimum	5 mm
• maximum	10 mm
busbar center-to-center spacing	60 mm
net weight	332 g

Approvals Certificates


General Product Approval	Test Certificates	Marine / Shipping
Confirmation  	Type Test Certificates/Test Report	Miscellaneous 

other Environment

Miscellaneous	Confirmation	Environmental Confirmations	Environmental Confirmations
-------------------------------	------------------------------	---	---

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
 Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1216-5AS80>
 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/8US1216-5AS80>
 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1216-5AS80
 CAx-Online-Generator
<http://www.siemens.com/cax>
 Tender specifications
<http://www.siemens.com/specifications>

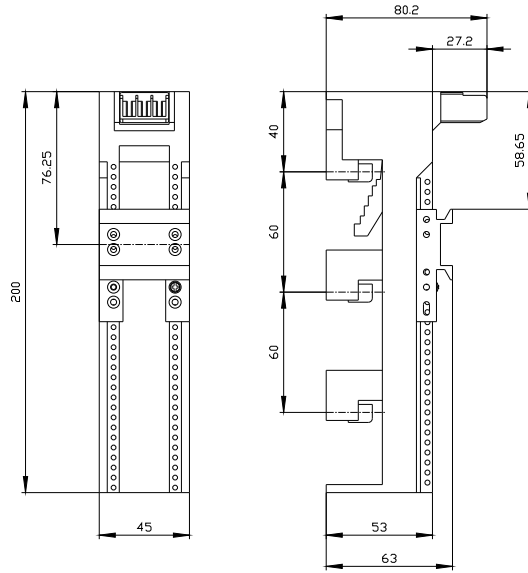

last modified:

4/30/2023 