

!!! Phased-out product !!! The successor product series is 3SK2 (see FAQ xxxxxxxxx) SIRIUS safety relay with relay and electronic 24 V DC, 45 mm screw terminal EC instantaneous: 2 NO EC delayed: 2 SC: 1 monitored start Basic device Maximum achievable PL according to EN 13849-1: Maximum achievable SIL according to IEC 61508: 3

General technical data	
Product brand name	SIRIUS
Product designation	safety relays
Design of the product	double monitored start
Protection class IP of the enclosure	IP20
Protection class IP of the terminal	IP20
Protection against electrical shock	finger-safe
Insulation voltage rated value	300 V
Ambient temperature	
• during storage	-40 ... +80 °C
• during operation	-25 ... +60 °C
Air pressure acc. to SN 31205	90 ... 106 kPa
Relative humidity during operation	10 ... 95 %
Installation altitude at height above sea level maximum	2 000 m
Vibration resistance acc. to IEC 60068-2-6	5 ... 500 Hz: 0,075 mm
Shock resistance	8g / 10 ms and 15g / 5 ms
Surge voltage resistance rated value	4 000 V
EMC emitted interference	IEC 60947-5-1, IEC 60000-4-3, IEC 60000-4-5, IEC 60000-4-6
Installation environment regarding EMC	This product is suitable for Class A environments only. It can cause undesired radio-frequency interference in residential environments. If this is the case, the user must take appropriate measures.
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	KT
Reference code acc. to DIN EN 61346-2	F
Number of sensor inputs	
• 1-channel or 2-channel	2
Design of the cascading	cascading or in-service switching
Type of the safety-related wiring of the inputs	single-channel and two-channel
Product feature cross-circuit-proof	Yes
Safety Integrity Level (SIL)	
• acc. to IEC 61508	3
• for delayed release circuit acc. to IEC 61508	SIL3

<b>SIL Claim Limit (subsystem) acc. to EN 62061</b>	3
<b>Performance level (PL)</b>	
• acc. to EN ISO 13849-1	e
• for delayed release circuit acc. to EN ISO 13849-1	e
<b>Category acc. to EN ISO 13849-1</b>	4
<b>Hardware fault tolerance acc. to IEC 61508</b>	1
<b>Safety device type acc. to IEC 61508-2</b>	Type B
<b>PFHD with high demand rate acc. to EN 62061</b>	0.0000000069 1/h
<b>T1 value for proof test interval or service life acc. to IEC 61508</b>	20 y
<b>Number of outputs as contact-affected switching element</b>	
• as NC contact	
— for signaling function instantaneous contact	0
• as NO contact	
— safety-related instantaneous contact	1
— safety-related delayed switching	1
<b>Number of outputs as contact-less semiconductor switching element</b>	
• safety-related	
— delayed switching	1
— instantaneous contact	1
• for signaling function	
— delayed switching	0
— instantaneous contact	1
<b>Stop category acc. to DIN EN 60204-1</b>	0 + 1

#### General technical data

<b>Design of input</b>	
• cascading input/functional switching	Yes
• feedback input	Yes
• Start input	Yes
<b>Type of electrical connection Plug-in socket</b>	Yes
<b>Operating frequency maximum</b>	2 000 1/h
<b>Switching capacity current</b>	
• <b>of semiconductor outputs</b>	
— for signaling function at DC-13 at 24 V	0.5 A
— for enabling circuit at DC-13 at 24 V	1 A
• <b>of the NO contacts of the relay outputs at DC-13</b>	
— at 24 V	1 A
— at 115 V	0.1 A

— at 230 V	0.1 A
• of the NO contacts of the relay outputs at AC-15	
— at 115 V	3 A
— at 230 V	3 A
<b>Mechanical service life (switching cycles) typical</b>	100 000
<b>Design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required</b>	gL/gG: 4 A or fast-acting: 4A
<b>DC resistance of the cable maximum</b>	1 000 $\Omega$
<b>Wire length between sensor and electronic evaluation device with Cu 1.5 mm<sup>2</sup> and 150 nF/km maximum</b>	1 000 m
<b>Make time with automatic start</b>	
• typical	60 ms
• at DC maximum	100 ms
<b>Make time with monitored start</b>	
• maximum	100 ms
• typical	60 ms
<b>Backslide delay time in the event of power failure</b>	
• typical	25 ms
• maximum	30 ms
<b>Adjustable OFF-delay time after opening of the safety circuits</b>	5 ... 300 s
<b>Recovery time after opening of the safety circuits typical</b>	400 ms
<b>Recovery time after power failure typical</b>	8 000 ms
<b>Pulse duration</b>	
• of the sensor input minimum	45 ms
• of the ON pushbutton input minimum	0.2 s
• of the cascading input minimum	0.045 s
<b>Control circuit/ Control</b>	
<b>Type of voltage of the control supply voltage</b>	DC
<b>Control supply voltage 1</b>	
• at DC rated value	24 V
<b>Operating range factor control supply voltage rated value of magnet coil</b>	
• at DC	0.85 ... 1.15
<b>Installation/ mounting/ dimensions</b>	
<b>Mounting position</b>	any
<b>Mounting type</b>	screw and snap-on mounting
<b>Width</b>	45 mm
<b>Height</b>	138.5 mm
<b>Depth</b>	88 mm

Connections/Terminals	
<b>Type of electrical connection</b>	screw-type terminals
<b>Type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>• solid</li> </ul>	1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• finely stranded</li> <li style="padding-left: 20px;">— with core end processing</li> </ul>	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
<b>Type of connectable conductor cross-sections at AWG conductors</b>	
<ul style="list-style-type: none"> <li>• solid</li> </ul>	2x (20 ... 14)
<ul style="list-style-type: none"> <li>• stranded</li> </ul>	2x (20 ... 14)
Product Function	
<b>Product function</b>	
<ul style="list-style-type: none"> <li>• Light barrier monitoring</li> <li>• Standstill monitoring</li> <li>• protective door monitoring</li> <li>• Automatic start</li> <li>• magnetically operated switch monitoring NC-NO</li> <li>• rotation speed monitoring</li> <li>• laser scanner monitoring</li> <li>• monitored start-up</li> <li>• Light array monitoring</li> <li>• magnetically operated switch monitoring NC-NC</li> <li>• EMERGENCY OFF function</li> <li>• Pressure-sensitive mat monitoring</li> </ul>	<p>Yes</p> <p>No</p> <p>Yes</p> <p>No</p> <p>No</p> <p>No</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p>
<b>Suitability for interaction press control</b>	No
<b>Suitability for use</b>	
<ul style="list-style-type: none"> <li>• Monitoring of floating sensors</li> <li>• Monitoring of non-floating sensors</li> <li>• safety switch</li> <li>• position switch monitoring</li> <li>• EMERGENCY-OFF circuit monitoring</li> <li>• valve monitoring</li> <li>• tactile sensor monitoring</li> <li>• magnetically operated switch monitoring</li> <li>• safety-related circuits</li> </ul>	<p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>No</p> <p>Yes</p> <p>Yes</p> <p>Yes</p>
Certificates/approvals	
<b>Certificate of suitability</b>	UL, CSA, EN 60204-1, EN ISO 12100, EN 954-1, IEC 61508
<ul style="list-style-type: none"> <li>• TÜV (German technical inspectorate) certificate</li> <li>• UL approval</li> </ul>	<p>Yes</p> <p>Yes</p>

• BG BIA certificate

Yes

<b>General Product Approval</b>	<b>EMC</b>	<b>Functional Safety/Safety of Machinery</b>
---------------------------------	------------	--



[Type Examination Certificate](#)

<b>Declaration of Conformity</b>	<b>Test Certificates</b>	<b>other</b>
----------------------------------	--------------------------	--------------



EG-Konf.

[Miscellaneous](#)

[Special Test Certificate](#)

[Confirmation](#)

[Environmental Conformations](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TK2845-1DB44>

### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TK2845-1DB44>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3TK2845-1DB44>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3TK2845-1DB44&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TK2845-1DB44&lang=en)

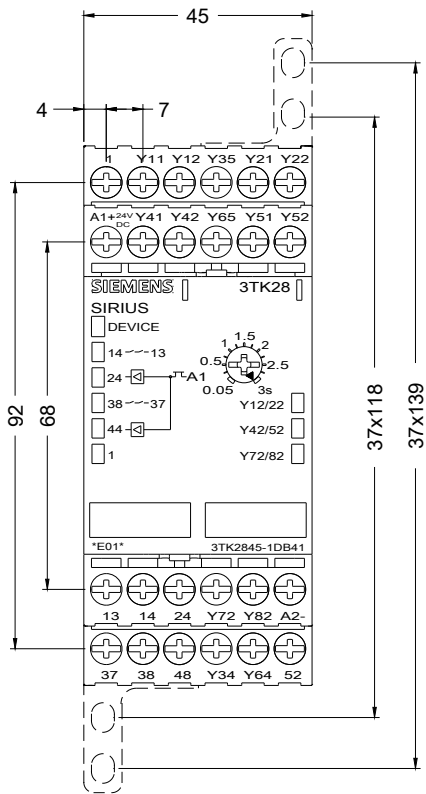

last modified:

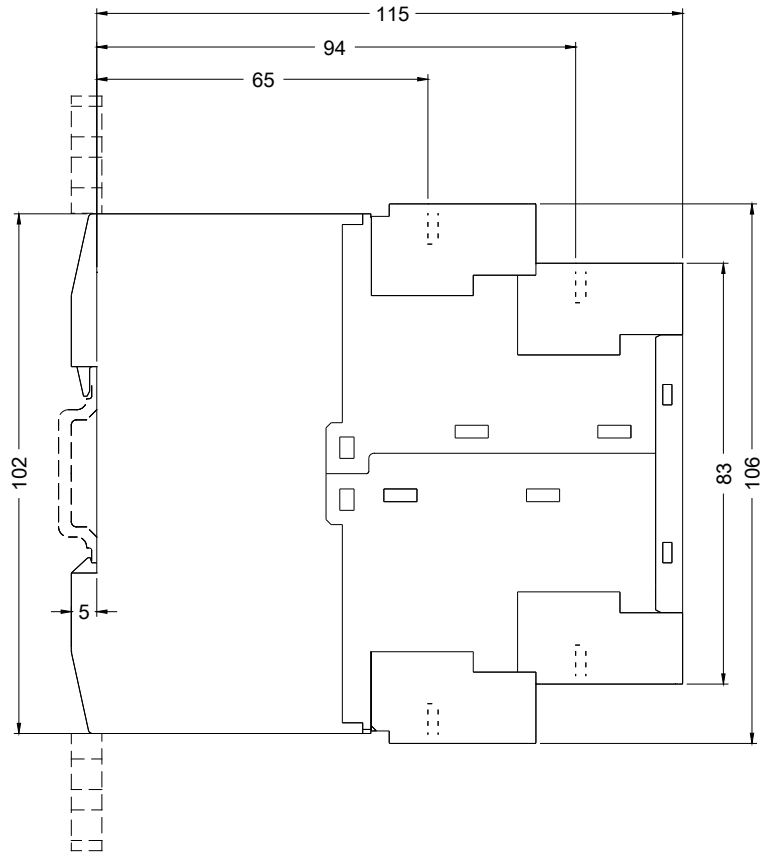

11/28/2019