



circuit breaker 3VA5 UL Frame 125 breaking capacity class S 25 kA @ 480 V 3-pole, line protection TM210, FTFM, In=40 A overload protection Ir=40 A permanently set short-circuit protection Ii=10 x In cable connection on two sides shunt trip left 110-127 V AC 50/60 Hz/DC 2 auxiliary switches HQ

Model	
product brand name	SENTRON
product designation	Molded-case circuit breaker
design of the product	System protection
Net Weight	1.153 kg

Approvals / Certificates
General Product Approval



[Confirmation](#)



General Product Approval EMV Test Certificates Marine / Shipping

[Miscellaneous](#)



[Type Test Certificates/Test Report](#)



Marine / Shipping other



[Confirmation](#)

[Miscellaneous](#)

[Miscellaneous](#)

Environment

[Environmental Confirmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
 Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfib=3VA5140-4ED36-0JC0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.industry.siemens.com/cs/ww/en/ps/3VA5140-4ED36-0JC0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA5140-4ED36-0JC0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

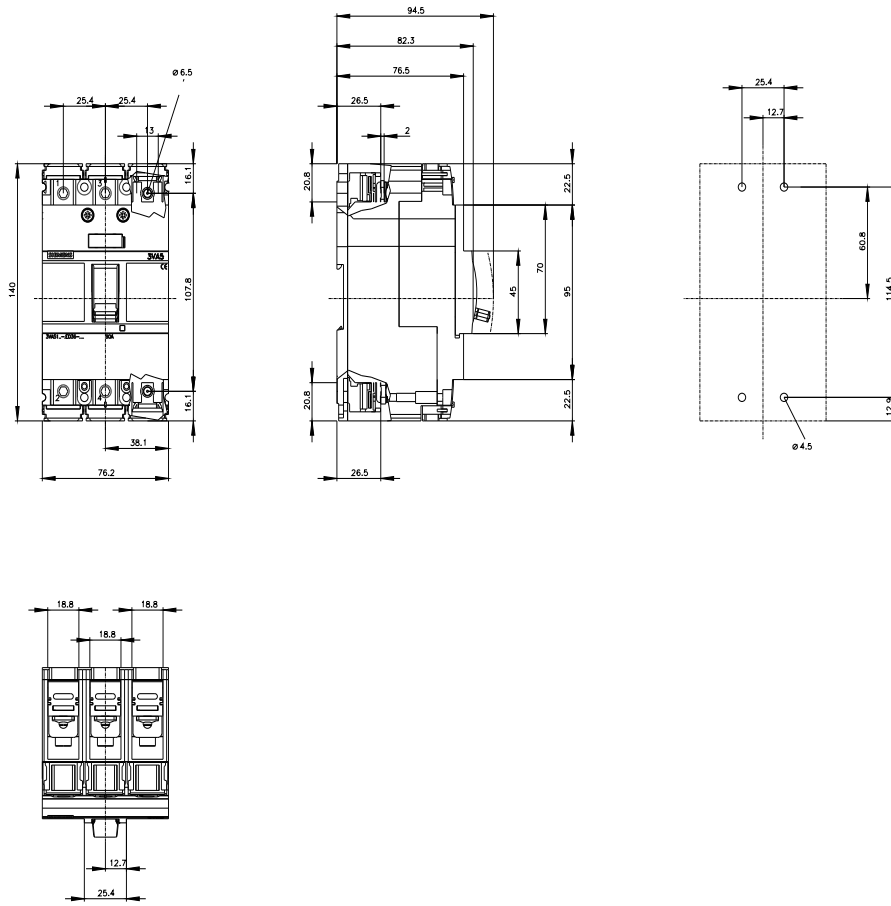

last modified:

3/11/2024 

