

CURRENT MEASURING MODULE; SET CURRENT 20...200A;
OVERALL WIDTH 120MM; BUS BAR CONNECTION



product brandname	SIRIUS
Product designation	Current measuring module
General technical data	
Product function	
• Current measurement	Yes
• voltage measurement	No
• active power measurement	No
• Power measurement	No
• frequency measurement	No
Product component	
• input for thermistor connection	No
Insulation voltage	
• with degree of pollution 3 rated value	690 V
Surge voltage resistance rated value	8 000 V
Protection class IP	IP00
Shock resistance	
• acc. to IEC 60068-2-27	15g / 11 ms
Vibration resistance	1-6 Hz / 15 mm; 6-500 Hz / 2 g
Equipment marking	

- acc. to DIN EN 81346-2

F

Electromagnetic compatibility

EMC emitted interference	
• acc. to IEC 60947-1	class A
Conducted interference	
• due to burst acc. to IEC 61000-4-4	2 kV
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV
• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m

Inputs/ Outputs

Number of outputs as contact-affected switching element	0
--	---

Protective and monitoring functions

Product function	
• power factor monitoring	No
• voltage detection	No

Motor protection functions

Product function	
• Current detection	Yes
• Overload protection	Yes

Installation/ mounting/ dimensions

Mounting position	any
Mounting type	direct mounting / stand-alone installation
Height	119 mm
Width	120 mm
Depth	145 mm
Required spacing	
• top	30 mm
• bottom	30 mm
• left	0 mm
• right	0 mm

Connections/Terminals

Type of electrical connection	
• for main current circuit	busbar connection

Ambient conditions

Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C

• during transport	-40 ... +80 °C
Relative humidity	
• during operation	5 ... 95 %

Short-circuit protection

Product function Short circuit protection	No
---	----

Main circuit

Number of poles for main current circuit	3
Adjustable pick-up value current of the current-dependent overload release	20 ... 200 A
Operating voltage	
• at AC	
— at 50 Hz rated value	110 ... 690 V
— at 60 Hz rated value	110 ... 690 V
Operating frequency rated value	50 ... 60 Hz

Control circuit/ Control

Type of voltage	AC
Type of voltage of the control supply voltage	AC

Certificates/approvals

General Product Approval			EMC	For use in hazardous locations	
					Explosion Protection Certificate

Declaration of Conformity	Test Certificates	Shipping Approval
 EG-Konf.	Type Test Certificates/Test Report	Special Test Certificate
	 ABS	 DNV
		 LRS

Shipping Approval	other			
 RMRS	Confirmation	PROFIsafe-Certification	 Profibus	PROFINET-Certification

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7103-1BA00-0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7103-1BA00-0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3UF7103-1BA00-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7103-1BA00-0&lang=en

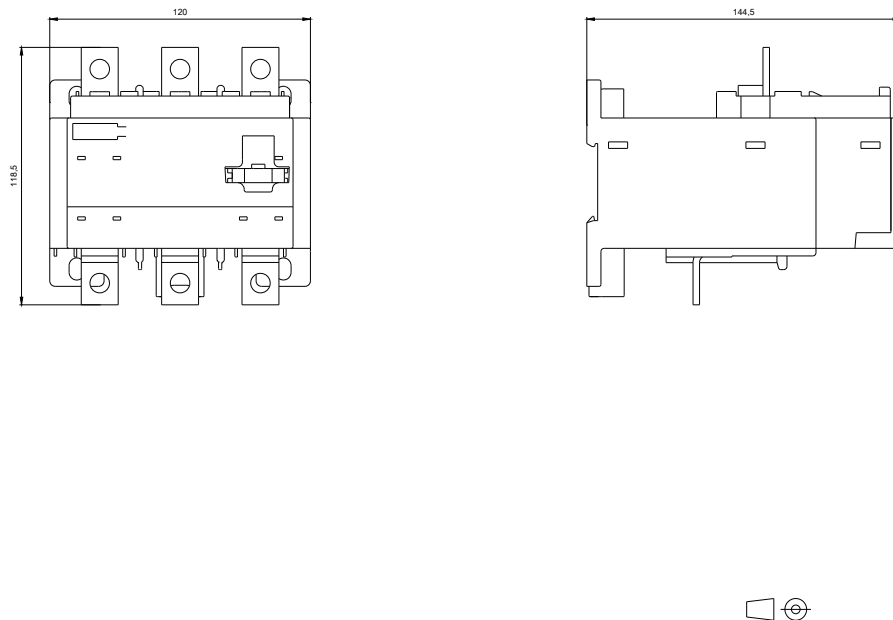

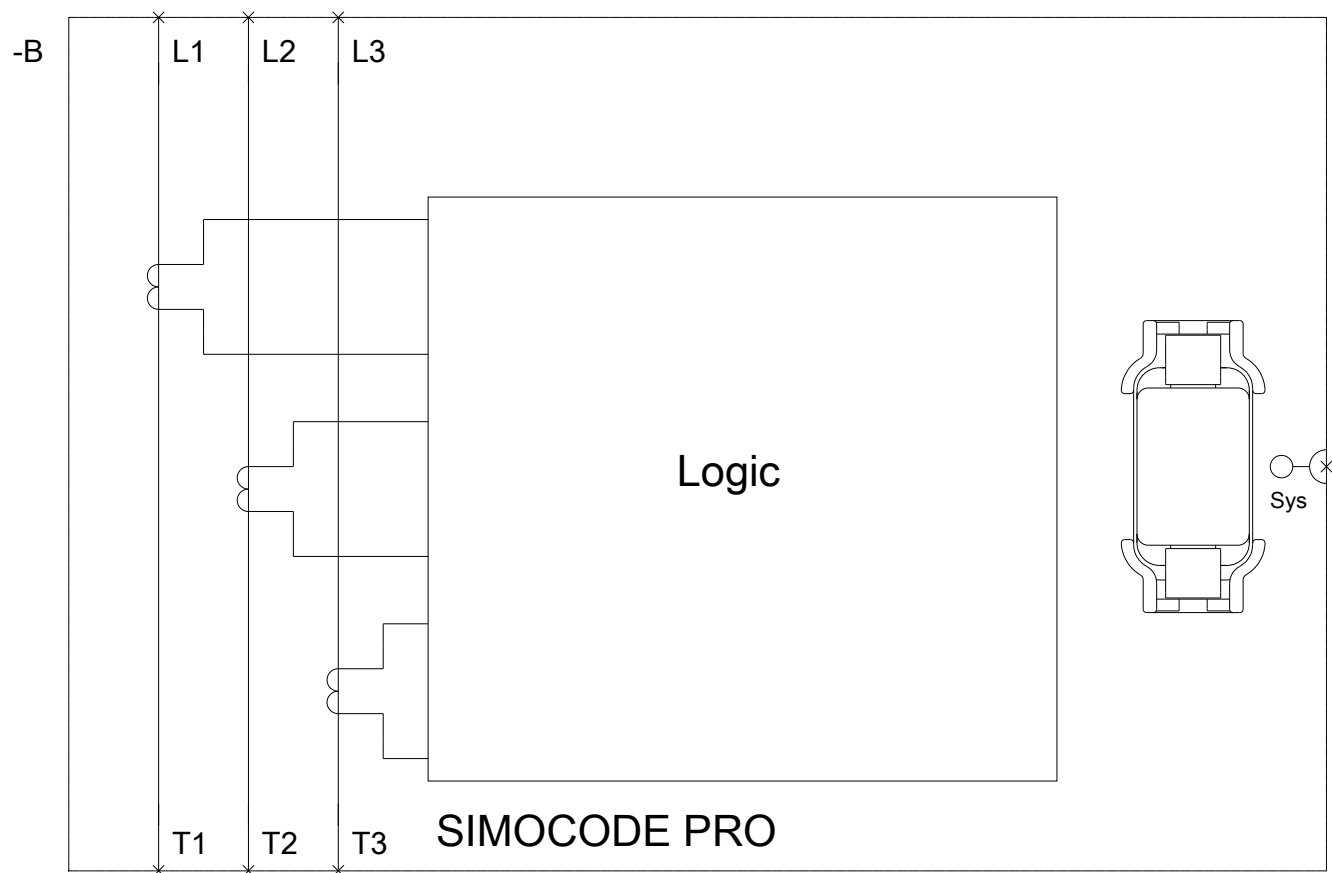

last modified:

07/03/2017 