



UPC: 019813748337

Weight: 0.0 lbs

Project:

Type:

Prepared By:

Date:

Technical Specifications

Performance

Product Type:

A-Line

Input Wattage:

15W

Lumens (Nominal):

1,600lm

Efficacy:

107lm/W

L70 Lifespan:

15,000-Hour LED lifespan based on IES LM-70 results

Wattage Equivalency:

100W Incandescent

Compliance

UL Listed:

Suitable for damp locations

Enclosed Fixtures:

Suitable for use in enclosed fixtures

LED Characteristics

Color Temperature:

2700K

Color Accuracy (CRI):

80 CRI

Electrical

Power Factor:

0.7

Dimmable:

Yes

Operating Temperature:

-20°C to 45°C (-4°F to 113°F)

Input Voltage:

120V

Operating Frequency:

60 Hz

Construction

Bulb Shape:

A19

Base Type:

E26 Edison

Optical

Beam Angle:

230°

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Case and Pallet Dimensions

|        | QTY  | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|------|-------------|------------|-------------|
| CASE   | 12   | 15.4        | 5.2        | 5           |
| PALLET | 2016 | 47.2        | 39.4       | 45.7        |

Dimension

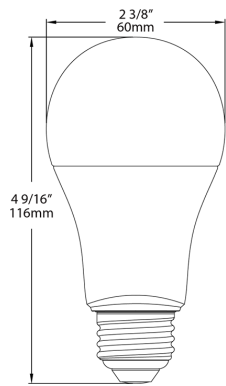

Features

- Replacement for High-output Incandescent or lower wattage metal halide and high pressure sodium lamps
- Rated for use in enclosed and open fixtures in dry or damp locations
- Ideal for post top, bollards, and outdoor corridor lighting
- Suitable for use in a base-up or base-down position

Ordering Matrix

| Family | Wattage                                                                      | Base Type                          | CRI/Color Temp                                                                                                  | Dimmable                              |
|--------|------------------------------------------------------------------------------|------------------------------------|-----------------------------------------------------------------------------------------------------------------|---------------------------------------|
| A19    | 15                                                                           | E26                                | 827                                                                                                             | DIM                                   |
|        | 5 = 5W<br>9 = 9W<br>10 = 10W<br>13 = 13W<br>15 = 15W<br>16 = 16W<br>23 = 23W | E26 = E26 Base<br>GU24 = GU24 Base | 850 = 80 CRI, 5000K<br>840 = 80 CRI, 4000K<br>835 = 80 CRI, 3500K<br>830 = 80 CRI, 3000K<br>827 = 80 CRI, 2700K | DIM = Dimmable<br>DIM 120V = Dimmable |