



ACCESSORY FOR SIRIUS 3RM1 3-PHASE FEED-IN
TERMINAL FOR MOTOR STARTERS SCREW-TYPE
CONNECTION

Figure similar

General technical data:		
product brand name		SIRIUS
Product designation		Infeed terminal
Design of the product		for busbar
Equipment marking acc. to DIN EN 81346-2		X
Operating current with AC at 480 V acc. to UL 508	A	16

Installation/ mounting/ dimensions:		
mounting position		any
Mounting type		screw fixing
Width	mm	24
Height	mm	40
Depth	mm	22

Connections/ Terminals:		
Type of connectable conductor cross-section		
<ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — solid — finely stranded — with core end processing • for AWG conductors for main contacts 		1x (1,5 ... 4 mm ²), 2x (1,5 ... 2,5 mm ²) 1x (1,5 ... 2,5 mm ²), 2x 1,5 mm ² 1x (16 ... 12), 2x (16 ... 14)

Certificates/ approvals:

General Product Approval	Declaration of Conformity	Test Certificates	other
---------------------------------	----------------------------------	--------------------------	--------------



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

[Environmental Confirmations](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RM19201AA>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RM19201AA>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RM19201AA&lang=en

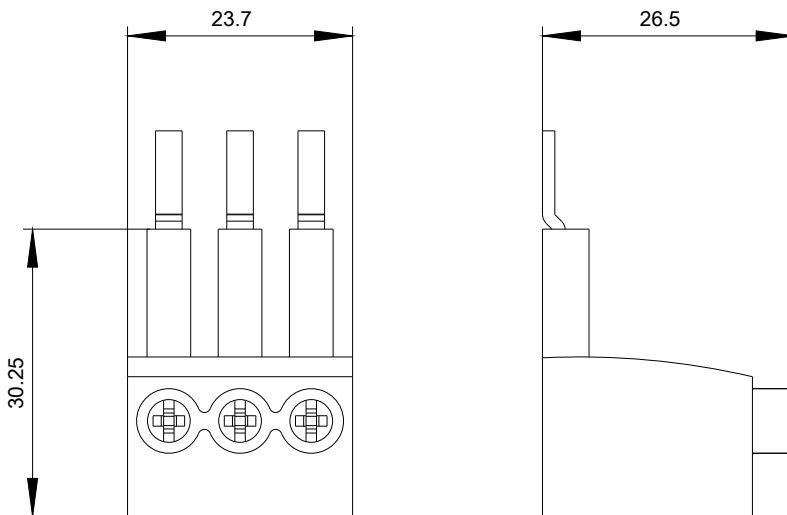

last modified:

27.04.2015