

SITOR fuse-disconnector 22x 58, Up to 100 A, 690 V AC



Model	
product brand name	SITOR
product designation	SITOR fuse switch disconnecter
design of the actuating element	swivel knob
General technical data	
number of poles	2
size of fuse link	22x58
utilization category	AC20B/690 V
size of the fuse link	22 x 58 mm
operating voltage	
• at AC rated value maximum	690 V
• at DC rated value maximum	800 V
Protection class	
protection class IP on the front	IP20
Main circuit	
operational current rated value	100 A
Suitability	
suitability for use	
• main switch	No
• switch disconnecter	Yes
• EMERGENCY OFF switch	No
• safety switch	Yes
Product function	
product function fuse monitoring	No
Short circuit	
conditional short-circuit current (I _q) rated value	100 kA
Connections	
connectable conductor cross-section solid	
• minimum	4 mm ²
• maximum	50 mm ²
type of electrical connection for main current circuit	screw-type terminals
Mechanical Design	
height	70 mm
depth	118 mm
fastening method	
• floor mounting	No
• rail mounting	No
net weight	316 g
Approvals Certificates	



[Confirmation](#)



General Product Approval

other

Environment



[Confirmation](#)

[Miscellaneous](#)

[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NC2292>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NC2292>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NC2292

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

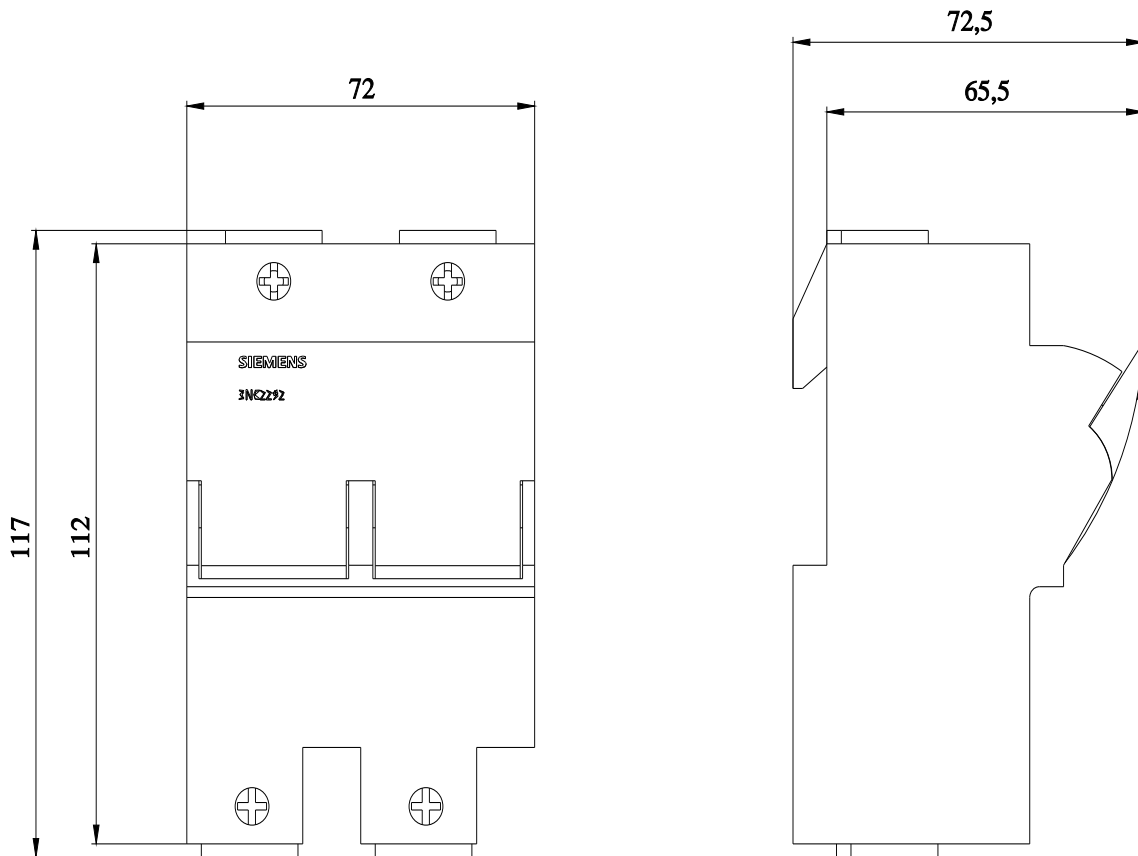



last modified:

4/20/2023 

