

SIRIUS motor starter M200D AS-i Communication: AS-Interface
 Reversing starter Basic Electronic switching AC-3, 0.75KW / 400 V
 0.15 A...2.00 A Electronic overload protection Thermistor:
 THERMOCLICK / PTC without brake contact 2DI AS-i + 2DI / 1DO
 on device Han Q4/2 - Han Q8/0 with manual on-site operation and
 key-operated switch



Product brand name	SIRIUS
Product designation	Motor starters
Design of the product	reversing starter
Product type designation	M200D
Trip class	CLASS 10
Product function	
• on-site operation	Yes
• Control circuit interface to parallel wiring	No
Insulation voltage rated value	500 V
Degree of pollution	3
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	400 V
• between control and auxiliary circuit	24 V
Protection class IP	IP65
Shock resistance	12g / 11 ms
Vibration resistance	7 mm / 2g
Type of assignment	1
Certificate of suitability	CE
Reference code acc. to DIN EN 61346-2	Q

Product function	
• direct start	No
• reverse starting	Yes
Product component Motor brake output	No
Product feature	
• brake control with 230 V AC	No
• brake control with 400 V AC	No
• brake control with 24 V DC	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No
Product extension braking module for brake control	No
Product function Short circuit protection	Yes
Design of short-circuit protection	circuit-breakers
Maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	50 000 A
• at 500 V rated value	20 000 A
EMC emitted interference acc. to IEC 60947-1	CISPR11, ambience A (group 2)
EMI immunity acc. to IEC 60947-1	corresponds to degree of severity 3, ambience A (industrial sector)
Conducted interference	
• due to burst acc. to IEC 61000-4-4	2 kV network connection / 1 kV control connection
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV
• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV
Protection against electrical shock	finger-safe

Main circuit	
Number of poles for main current circuit	3
Design of the switching contact	solid-state / thyristor / 2 phases
Adjustable pick-up value current of the current-dependent overload release	0.15 ... 2 A
Type of the motor protection	full motor protection
Operating voltage rated value	360 ... 440 V
Operating current	
• at AC at 400 V rated value	2 A
• at AC-3 at 400 V rated value	2 A
Operating power at AC-3	
• at 400 V rated value	0.75 kW
• at 500 V rated value	750 W
Product function	
• digital inputs parameterizable	No
• digital outputs parameterizable	No
Number of digital inputs	4

Number of sockets	
• for digital output signals	1
• for digital input signals	4
Number of digital outputs	1

Supply voltage

Type of voltage of the supply voltage	DC
Supply voltage 1 at DC rated value	30 V
• minimum permissible	26.5 V
• maximum permissible	31.6 V

Control circuit/ Control

Type of voltage of the control supply voltage	DC
Control supply voltage at DC	
• rated value	20.4 ... 28.8 V
Control supply voltage 1	
• at DC rated value	24 V
• at DC rated value	20.4 ... 28.8 V
• at DC	20.4 ... 28.8 V
Power loss [W] in auxiliary and control circuit	
• in switching state OFF with bypass circuit	1.9584 W
• in switching state ON with bypass circuit	6.9408 W

Response times

Switch-on delay time	25 ms
Off-delay time	35 ms
Mounting position	vertical, horizontal, flat
• recommended	horizontal
Mounting type	screw fixing
Height	215 mm
Width	294 mm
Depth	159 mm
Installation altitude at height above sea level maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +55 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
Relative humidity during operation	10 ... 95 %
Protocol is supported	
• PROFIBUS DP protocol	No
• PROFINET protocol	No
Design of the interface	
• AS-Interface protocol	Yes

<ul style="list-style-type: none"> • PROFINET protocol 	No	
<ul style="list-style-type: none"> • PROFIBUS DP protocol 	No	
Product function Bus communication	Yes	
Protocol is supported AS-Interface protocol	Yes	
Product function Control circuit interface with IO link	No	
Type of electrical connection of the communication interface	M12 plug	
Type of electrical connection	plug according to ISO 23570, HAN Q4/2 connector	
<ul style="list-style-type: none"> • for main current circuit • for auxiliary and control current circuit 		
Type of electrical connection	M12 socket	
<ul style="list-style-type: none"> • 1 for digital input signals 		
<ul style="list-style-type: none"> • 1 for digital output signals 		
<ul style="list-style-type: none"> • 2 for digital input signals 		
<ul style="list-style-type: none"> • 3 for digital input signals 		
<ul style="list-style-type: none"> • 4 for digital input signals 	M12 socket	
Type of electrical connection	optical interface	
<ul style="list-style-type: none"> • at the manufacturer-specific device interface 		
<ul style="list-style-type: none"> • for device addressing 		M12 plug
<ul style="list-style-type: none"> • for supply voltage line-side 		M12 plug

Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
---------------------------------	------------	----------------------------------



Declaration of Conformity	Test Certificates	other
----------------------------------	--------------------------	--------------

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)



ASi

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1315-6KS71-3AA0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1315-6KS71-3AA0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1315-6KS71-3AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1315-6KS71-3AA0&lang=en

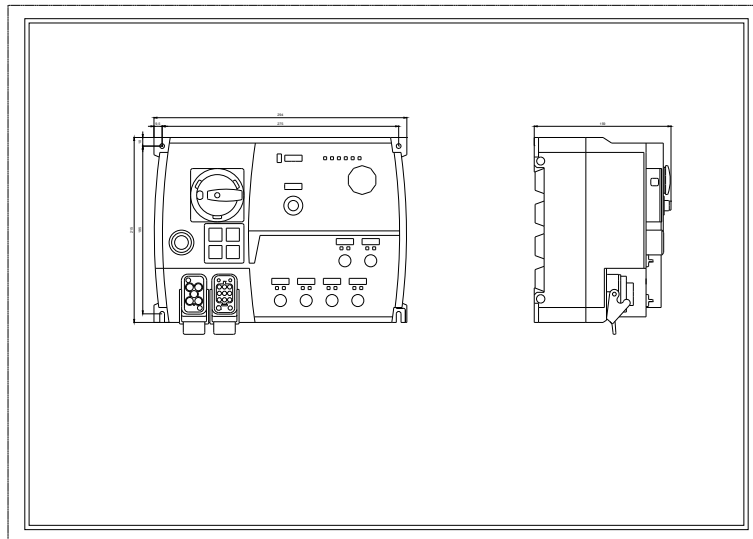

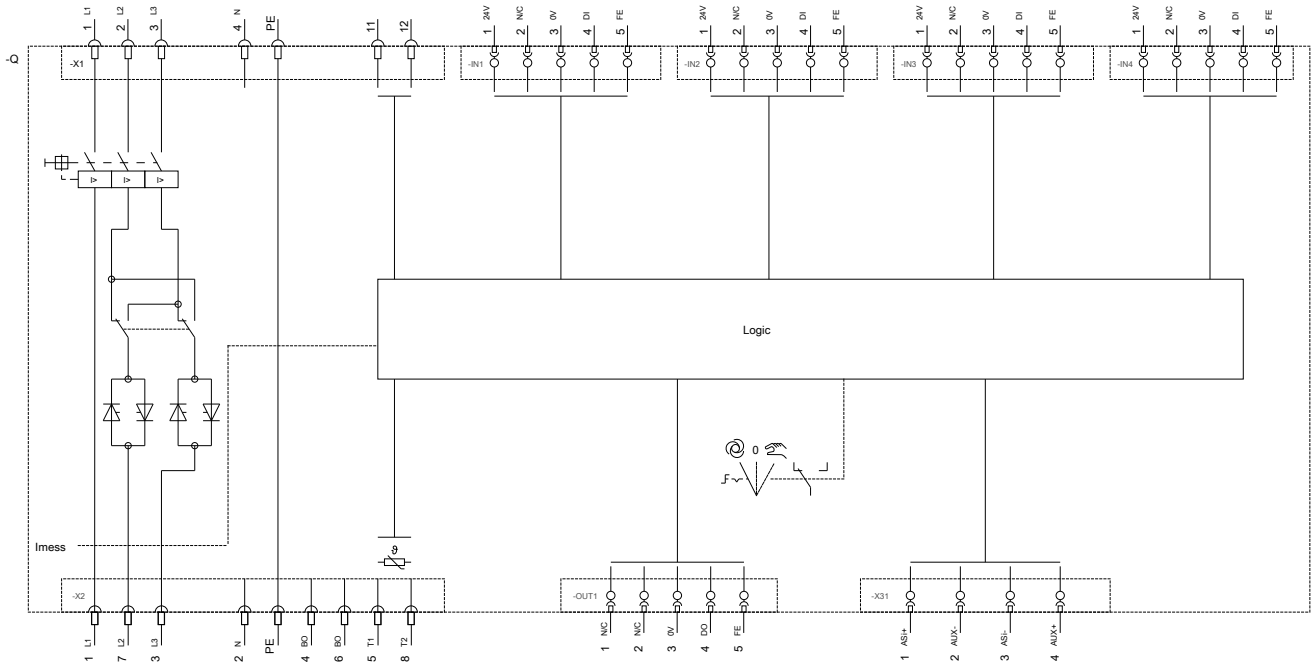

last modified:

11/08/2019