

Mechanically held lighting contactor, Contactor amp rating 60Amp  
 0NC \_ 8NO poles, 550VAC 50HZ/600VAC 60HZ coil, Non-  
 combination type, Enclosure NEMA type 1, Indoor general purpose  
 use



Figure similar

|                         |   |
|-------------------------|---|
| Product brand name      | Class CLM                               |
| Design of the product   | Magnetically latched lighting contactor |
| Special product feature | Energy efficient; Quiet operation       |

| General technical data                                       |                          |
|--|--------------------------|
| Weight [lb]  | 20 lb                    |
| Height x Width x Depth [in]                                  | 16 x 17 x 8 in           |
| Protection against electrical shock                          | NA for enclosed products |
| Installation altitude [ft] at height above sea level maximum | 6560 ft                  |
| Country of origin  | USA                      |

| Contactor   |          |
|---|----------|
| Size of contactor   | 60 Amp   |
| Number of NO contacts for main contacts                                 | 8        |
| Number of NC contacts for main contacts                                 | 0        |
| Operating voltage for main current circuit at AC at 60 Hz maximum       | 600 V    |
| Mechanical service life (switching cycles) of the main contacts typical | 10000000 |

|  |   |
|--|---|
| Contact rating of the main contacts of lighting contactor  |   |
| <ul style="list-style-type: none"> <li>• at tungsten (1 pole per 1 phase) rated value</li> <li>• at tungsten (2 poles per 1 phase) rated value</li> <li>• at tungsten (3 poles per 3 phases) rated value</li> <li>• at ballast (1 pole per 1 phase) rated value</li> <li>• at ballast (2 poles per 1 phase) rated value</li> <li>• at ballast (3 poles per 3 phases) rated value</li> <li>• at resistive load (1 pole per 1 phase) rated value</li> <li>• at resistive load (2 poles per 1 phase) rated value</li> <li>• at resistive load (3 poles per 3 phases) rated value</li> </ul> | <p>60A @277V 1p 1ph</p> <p>60A @480V 2p 1ph</p> <p>60A @480V 3p 3ph</p> <p>60A @347V 1p 1ph</p> <p>60A @600V 2p 1ph</p> <p>60A @600V 3p 3ph</p> <p>60A @347V 1p 1ph</p> <p>60A @600V 2p 1ph</p> <p>60A @600V 3p 3ph</p> |

| Auxiliary contact   |    |
|---|----|
| Number of NC contacts for auxiliary contacts                      | 0  |
| Number of NO contacts for auxiliary contacts                      | 0  |
| Number of total auxiliary contacts maximum                        | 4  |
| Contact rating of auxiliary contacts of contactor according to UL | NA |

| Coil   |                           |
|--|---------------------------|
| Type of voltage of the control supply voltage  | AC                        |
| Control supply voltage   |                           |
| <ul style="list-style-type: none"> <li>• at AC at 50 Hz rated value</li> <li>• at AC at 60 Hz rated value</li> </ul> | <p>550 V</p> <p>600 V</p> |
| Apparent pick-up power of magnet coil at AC  | 1200 V·A                  |
| Apparent holding power of magnet coil at AC  | 80 V·A                    |
| Operating range factor control supply voltage rated value of magnet coil   | 0.85 ... 1.1              |

| Enclosure   |                            |
|---|----------------------------|
| Degree of protection NEMA rating of the enclosure | NEMA 1 enclosure           |
| Design of the housing                             | Indoor general purpose use |

| Mounting/wiring  |                                   |
|--|-----------------------------------|
| Mounting position  | Vertical                          |
| Mounting type  | Surface mounting and installation |
| Type of electrical connection for supply voltage line-side   | Box lug                           |
| Tightening torque [lbf·in] for supply  | 45 ... 50 lbf·in                  |
| Type of connectable conductor cross-sections at line-side at AWG conductors single or multi-stranded | 1x (14 ... 4 AWG)                 |
| Temperature of the conductor for supply maximum permissible  | 75 °C                             |

|   |                      |
|---|----------------------|
| Material of the conductor for supply  | AL or CU             |
| Type of electrical connection for load-side outgoing feeder   | Box lug              |
| Tightening torque [lbf·in] for load-side outgoing feeder  | 45 ... 50 lbf·in     |
| Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder single or multi-stranded | 1x (14 ... 4 AWG)    |
| Temperature of the conductor for load-side outgoing feeder maximum permissible  | 75 °C                |
| Material of the conductor for load-side outgoing feeder   | AL or CU             |
| Type of electrical connection of magnet coil  | Screw-type terminals |
| Tightening torque [lbf·in] at magnet coil   | 8 ... 12 lbf·in      |
| Type of connectable conductor cross-sections of magnet coil at AWG conductors single or multi-stranded                | 2x (16 ... 12 AWG)   |
| Temperature of the conductor at magnet coil maximum permissible   | 75 °C                |
| Material of the conductor at magnet coil  | CU                   |

#### Short-circuit current rating

|  |                                  |
|--|----------------------------------|
| Design of the fuse link for short-circuit protection of the main circuit required  | none                             |
| Design of the short-circuit trip   | Thermal magnetic circuit breaker |
| Maximum short-circuit current breaking capacity (Icu) <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 480 V</li> <li>• at 600 V</li> </ul> | 5 kA<br>5 kA<br>5 kA             |
| Certificate of suitability   | NEMA ICS 2; UL 508A              |

#### Further information

**Industrial Controls - Product Overview (Catalogs, Brochures,...)**

[www.usa.siemens.com/iccatalog](http://www.usa.siemens.com/iccatalog)

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:CLM1D08600>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**



<https://support.industry.siemens.com/cs/US/en/ps/US2:CLM1D08600>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=US2:CLM1D08600&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:CLM1D08600&lang=en)

**Certificates/approvals**

<https://support.industry.siemens.com/cs/US/en/ps/US2:CLM1D08600/certificate>

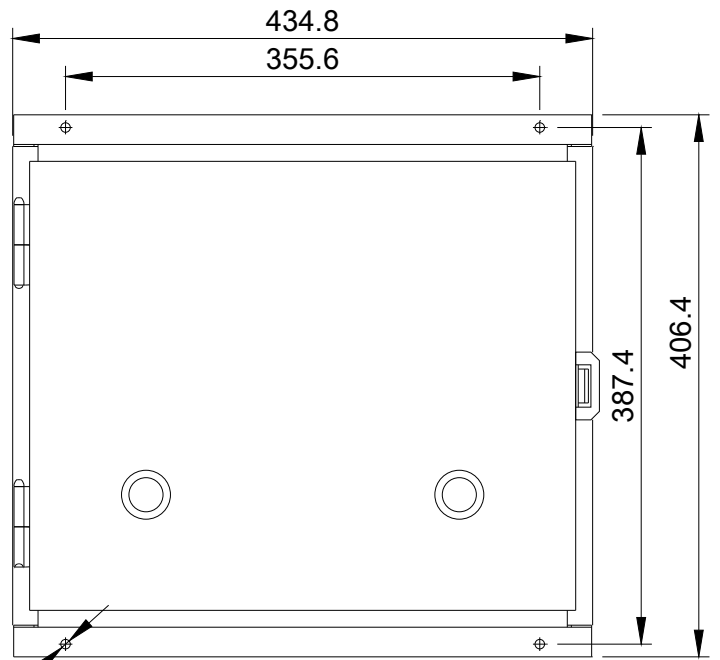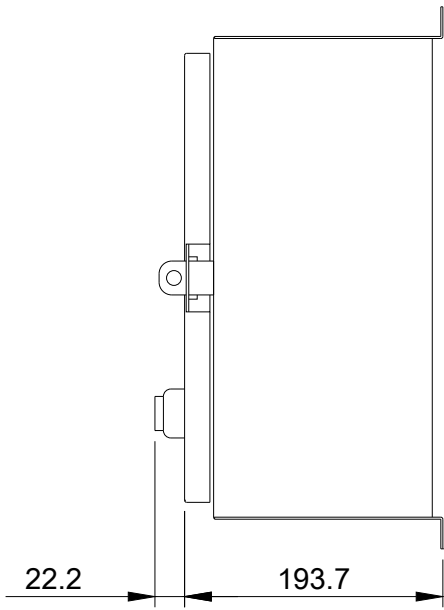

(4) M7 DIA HOLES

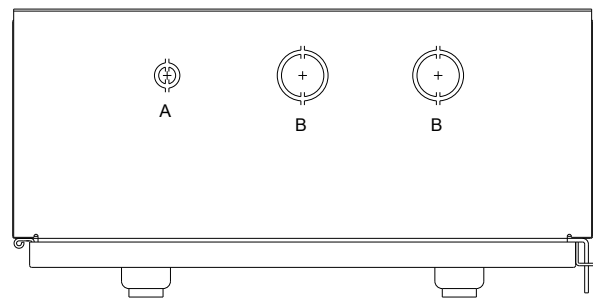


4 CONDUITS TYP. TOP & BOTTOM

| LETTER | CONDUIT SIZE          |
|--------|-----------------------|
| A      | Ø12.7 & Ø19 CONDUIT   |
| B      | Ø31.8 & Ø38.1 CONDUIT |

Wiring Diagram Class CLM  
30-60 Amp 8 Pole

To  
Control  
Devices

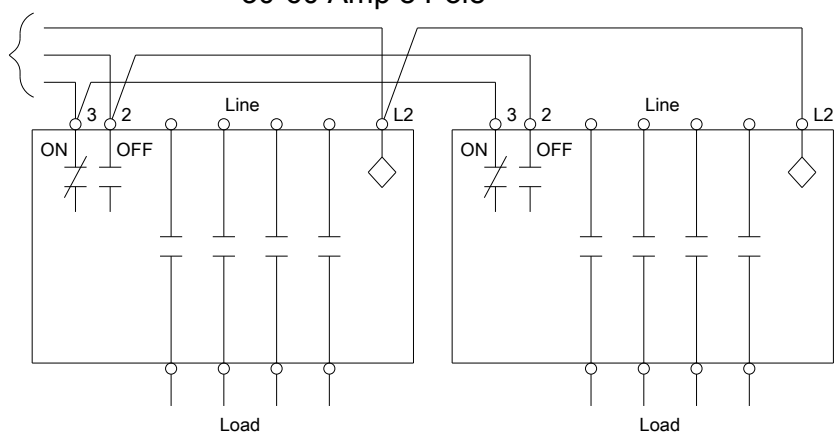

Optional auxiliary contacts are not shown.

E87010-A0410-T009-A1-CLM-3

last modified:

11/28/2019