

**Siemens**  
**EcoTech**



circuit breaker 3VA6 UL Frame 400 breaking capacity class C 100 kA @ 480 V 3-pole, line protection ETU850, LSI, In=250 A overload protection Ir=100 A...250 A short-circuit protection Isd=0.6..10x In, li=1.5..12x In neutral conductor protection optionally with external current transformer, up to 160% without connection



| Model                                                                                                                      |                             |
|----------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| product brand name                                                                                                         | SENTRON                     |
| product designation                                                                                                        | Molded-case circuit breaker |
| product designation / according to UL file                                                                                 | CJAE                        |
| design of the product                                                                                                      | System protection           |
| design of the load switch / according to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type) | Yes                         |
| design of the overcurrent release                                                                                          | ETU850                      |
| protection function of the overcurrent release                                                                             | LSI                         |
| number of poles                                                                                                            | 3                           |
| General technical data                                                                                                     |                             |
| insulation voltage / rated value                                                                                           | 800 V                       |
| operating voltage / at AC / rated value                                                                                    | 690 V                       |
| power loss [W] / maximum                                                                                                   | 27 W                        |
| power loss [W] / for rated value of the current / at AC / in hot operating state / per pole                                | 9 W                         |
| mechanical service life (operating cycles) / typical                                                                       | 20 000                      |
| electrical endurance (operating cycles) / at AC-1 / at 380/415 V                                                           | 6 000                       |
| electrical endurance (operating cycles) / at AC-1 / at 690 V                                                               | 4 200                       |
| electrical endurance (operating cycles) / at 480 V                                                                         | 6 000                       |
| electrical endurance (operating cycles) / at 600 V                                                                         | 4 200                       |
| product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof                     | Yes                         |
| ground-fault monitoring version                                                                                            | without                     |
| product function                                                                                                           |                             |
| • communication function                                                                                                   | Yes                         |
| • other measurement function                                                                                               | Yes                         |
| Net Weight                                                                                                                 | 5.3 kg                      |
| Current                                                                                                                    |                             |
| marking / according to UL 489 / 100%-rated breaker                                                                         | No                          |
| operational current                                                                                                        |                             |
| • at 40 °C                                                                                                                 | 250 A                       |
| • at 45 °C                                                                                                                 | 250 A                       |
| • at 50 °C                                                                                                                 | 250 A                       |
| • at 55 °C                                                                                                                 | 250 A                       |
| • at 60 °C                                                                                                                 | 250 A                       |
| • at 65 °C                                                                                                                 | 250 A                       |
| • at 70 °C                                                                                                                 | 250 A                       |

| Switching capacity according to IEC 60947                                                                         |                             |
|-------------------------------------------------------------------------------------------------------------------|-----------------------------|
| switching capacity class of the circuit breaker                                                                   | C                           |
| maximum short-circuit current breaking capacity (I <sub>cu</sub> )                                                |                             |
| • at 240 V                                                                                                        | 150 kA                      |
| • at 415 V                                                                                                        | 110 kA                      |
| • at 690 V                                                                                                        | 5 kA                        |
| operating short-circuit current breaking capacity (I <sub>cs</sub> )                                              |                             |
| • at 240 V                                                                                                        | 150 kA                      |
| • at 415 V                                                                                                        | 110 kA                      |
| • at 690 V                                                                                                        | 5 kA                        |
| short-circuit current making capacity (I <sub>cm</sub> )                                                          |                             |
| • at 240 V                                                                                                        | 330 kA                      |
| • at 415 V                                                                                                        | 242 kA                      |
| • at 690 V                                                                                                        | 7.5 kA                      |
| Switching capacity according to UL 489                                                                            |                             |
| current breaking capacity                                                                                         |                             |
| • at 240 V                                                                                                        | 200 kA                      |
| • at 480 V                                                                                                        | 100 kA                      |
| • at 600 V                                                                                                        | 35 kA                       |
| Adjustable parameters                                                                                             |                             |
| adjustable response value setting current (I <sub>r</sub> ) / of the L-trip / with I <sub>2t</sub> characteristic |                             |
| • minimum                                                                                                         | 100 A                       |
| • maximum                                                                                                         | 250 A                       |
| adjustable response value delay time (t <sub>r</sub> ) / for L-tripping / with I <sub>2t</sub> characteristic     |                             |
| • minimum                                                                                                         | 0.5 s                       |
| • maximum                                                                                                         | 25 s                        |
| adjustable response value setting current (I <sub>sd</sub> ) / of S-trip / with I <sub>0t</sub> characteristic    |                             |
| • minimum                                                                                                         | 150 A                       |
| • maximum                                                                                                         | 2 500 A                     |
| adjustable response value setting current (I <sub>sd</sub> ) / of S-trip / with I <sub>2t</sub> characteristic    |                             |
| • minimum                                                                                                         | 150 A                       |
| • maximum                                                                                                         | 2 500 A                     |
| adjustable response value delay time (t <sub>sd</sub> ) / for S-tripping / with I <sub>0t</sub> characteristic    |                             |
| • minimum                                                                                                         | 0.05 s                      |
| • maximum                                                                                                         | 0.5 s                       |
| adjustable response value delay time (t <sub>sd</sub> ) / for S-tripping / with I <sub>2t</sub> characteristic    |                             |
| • minimum                                                                                                         | 0.05 s                      |
| • maximum                                                                                                         | 0.5 s                       |
| adjustable response value setting current (I <sub>i</sub> ) / for I-tripping                                      |                             |
| • minimum                                                                                                         | 375 A                       |
| • maximum                                                                                                         | 3 000 A                     |
| adjustable setting current (I <sub>nN</sub> ) / for N-tripping                                                    |                             |
| • minimum                                                                                                         | 0 A                         |
| • maximum                                                                                                         | 0 A                         |
| design of the N-conductor protection                                                                              | adjustable OFF; 20% to 160% |
| product function / grounding protection                                                                           | No                          |
| Mechanical Design                                                                                                 |                             |
| product component                                                                                                 |                             |
| • undervoltage release                                                                                            | No                          |
| • voltage trigger                                                                                                 | No                          |
| • trip indicator                                                                                                  | No                          |
| height [in]                                                                                                       | 9.76 in                     |
| height                                                                                                            | 248 mm                      |
| width [in]                                                                                                        | 5.43 in                     |
| width                                                                                                             | 138 mm                      |
| depth [in]                                                                                                        | 4.33 in                     |

|                                                                 |                    |
|-----------------------------------------------------------------|--------------------|
| depth                                                           | 110 mm             |
| <b>Connections</b>                                              |                    |
| arrangement of electrical connectors / for main current circuit | Without connection |
| type of electrical connection / for main current circuit        | Without            |
| <b>Auxiliary circuit</b>                                        |                    |
| number of CO contacts / for auxiliary contacts                  | 0                  |
| <b>Accessories</b>                                              |                    |
| product extension / optional / motor drive                      | Yes                |
| <b>Environmental conditions</b>                                 |                    |
| protection class IP / on the front                              | IP40               |
| ambient temperature                                             |                    |
| • during operation / minimum                                    | -25 °C             |
| • during operation / maximum                                    | 70 °C              |
| • during storage / minimum                                      | -40 °C             |
| • during storage / maximum                                      | 80 °C              |
| <b>Environmental footprint</b>                                  |                    |
| Global Warming Potential [CO2 eq] / total                       | 495 kg             |
| Global Warming Potential [CO2 eq] / during manufacturing        | 28.7 kg            |
| Global Warming Potential [CO2 eq] / during operation            | 470 kg             |
| Global Warming Potential [CO2 eq] / after end of life           | -4.07 kg           |
| Siemens Eco Profile (SEP)                                       | Siemens EcoTech    |
| reference code / according to IEC 81346-2                       | Q                  |

#### Approvals / Certificates

##### General Product Approval



[Confirmation](#)



##### General Product Approval

##### EMV

##### Marine / Shipping



[Miscellaneous](#)



##### Marine / Shipping

##### other



[Miscellaneous](#)

[Confirmation](#)

[Miscellaneous](#)

##### Dangerous goods

##### Environment

[Transport Information](#)



Siemens  
EcoTech



[Environmental Confirmations](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)



<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA6325-7KP31-0AA0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA6325-7KP31-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA6325-7KP31-0AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA6325-7KP31-0AA0)

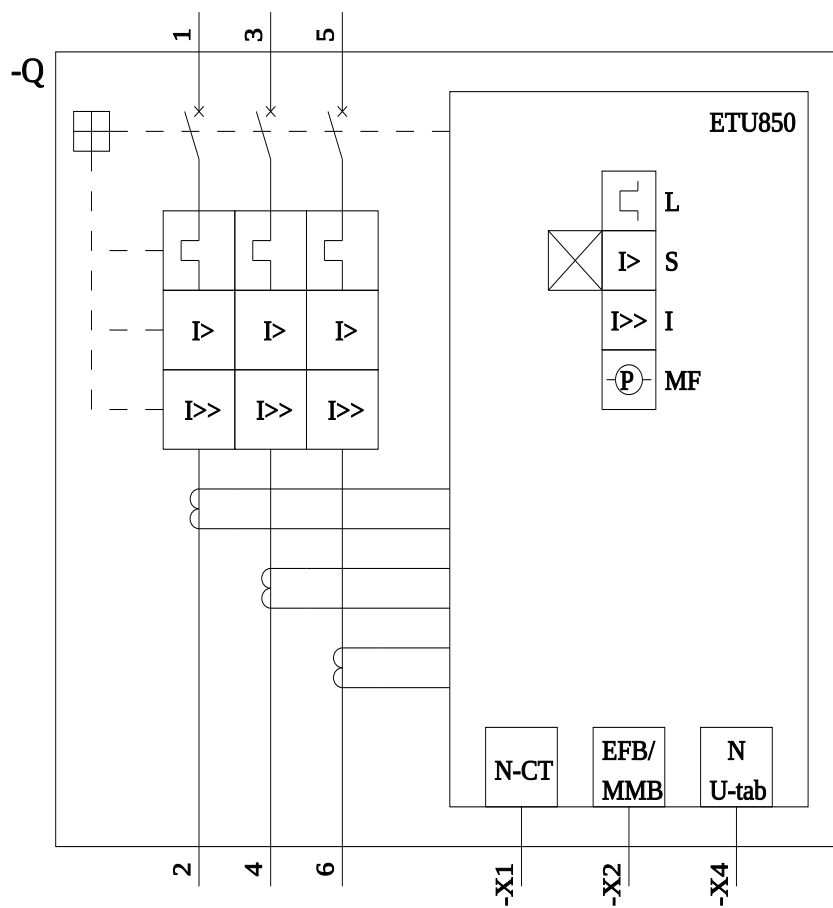

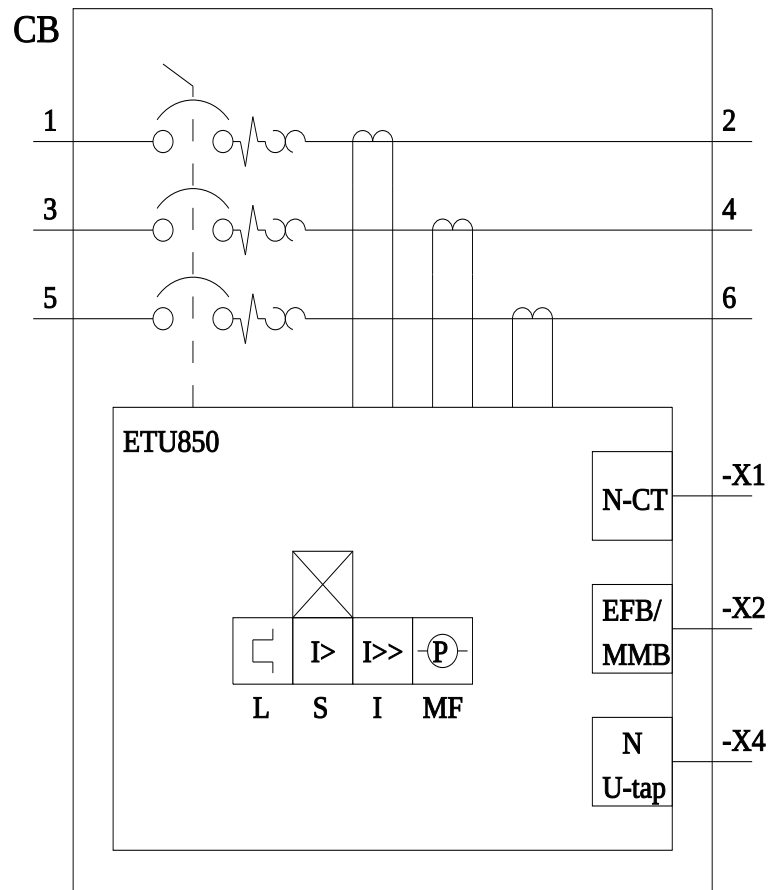

last modified:

10/24/2024

