

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P36F17M-XXYZ	SEE SHEET 2

SPECIFICATION:






- STANDARD:
 - UNIT TYPE: MONITORED OUTLET
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY & TYPE: (30) C13, (6) C19
 - INPUT VOLTAGE: 100-120/200-240VAC
 - INPUT CURRENT: 30A (24A DERATED)
 - BREAKER QTY & TYPE: (3) 20AMP, DOUBLE-POLE THREE-PHASE WYE
 - INPUT PHASE: 8.6kVA
 - RATED POWER: NEMA L21-30P
 - INPUT PLUG: SEE SHEET 2 FOR PART NUMBER TABLE
 - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
 - REGULATORY STANDARD: RoHS COMPLIANT
- ADDITIONAL: NONE
- ACCESSORIES: (1) QUICK-START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: **P36F17M-XX Y Z**

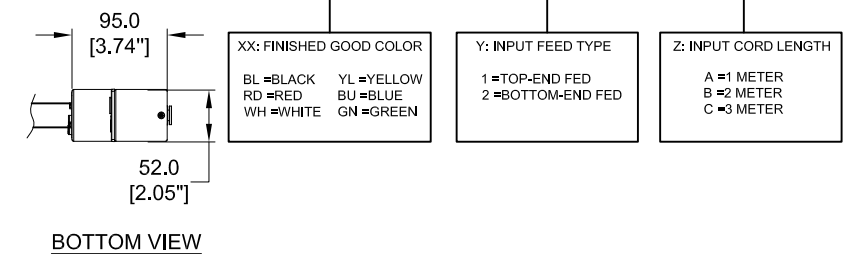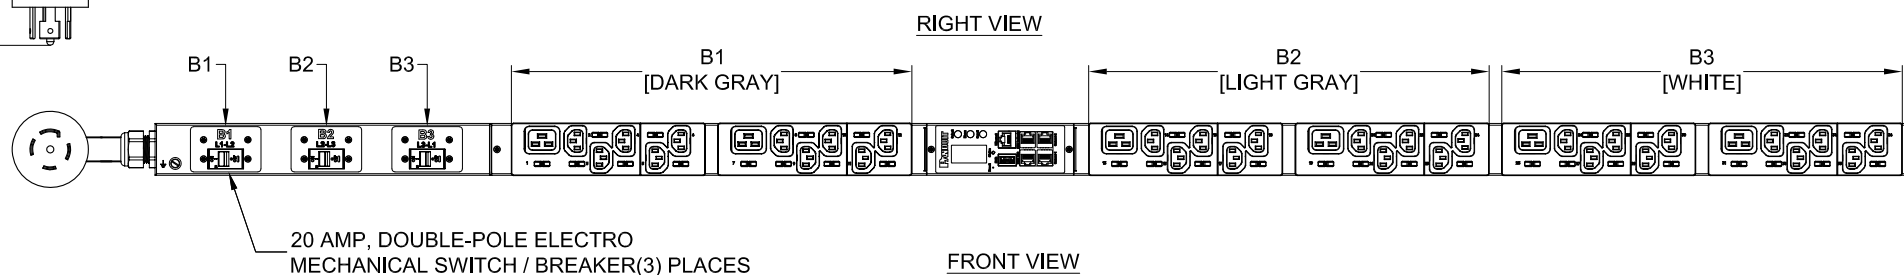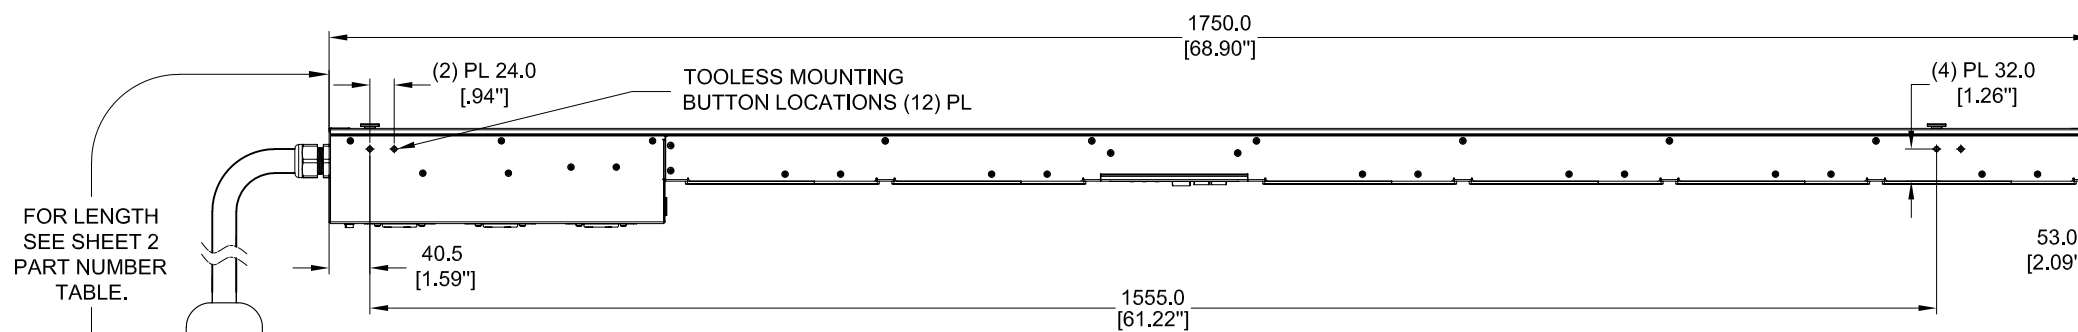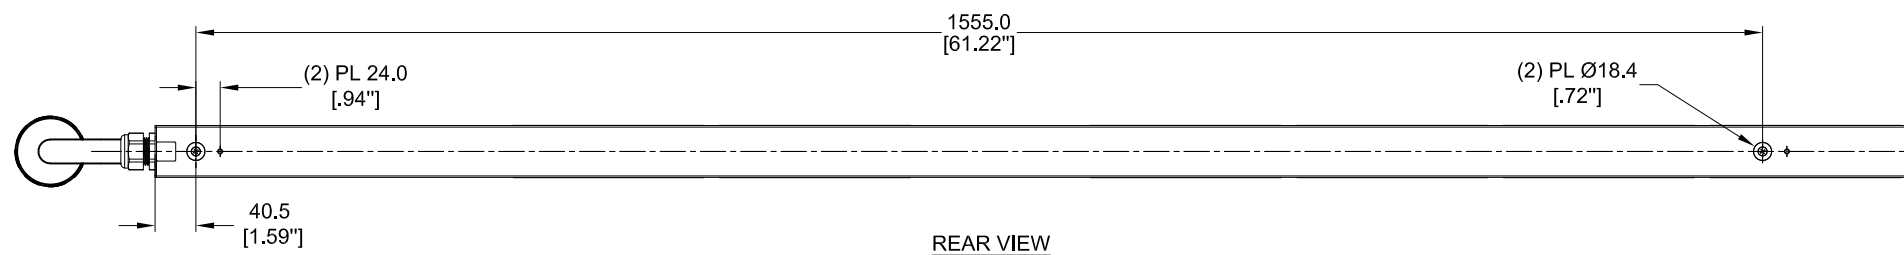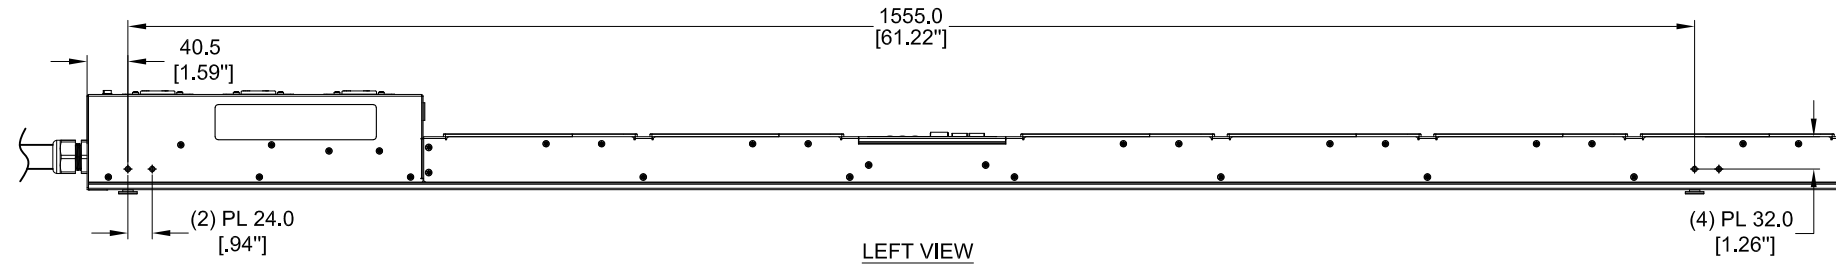

PLUG/RECEPTACLE BLOCK

PLUG
NEMA L21-30P, 4P 5W
30A, 120/208V MAX RATED INPUT
24A DERATED

RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT

RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36F17M
01A	10/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36F17M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN _____
DATE _____
PRINT _____

TITLE: INTELLIGENT SERIES PDU
P36F17M-XXYZ
CUSTOMER DRAWING

ITEM REVISION NAME: _____
DATASHEET FILE NAME: _____

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)	
0-4<50	±0.5
50-4<250	±1.0
250-4<500	±1.5
500-4<1000	±2.5
1000-4<2000	±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR: N/A

DRAWING NUMBER: P36F17M_DC

DRAWN BY: GEORGE DATE: 10/11/2017 CHK: SEAN SCALE: NONE

SHT 1 OF 2 SCALE: B

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36F17M	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[+10"/-5"]	9.4kg
P36F17M-BL1A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.2kg
P36F17M-BL1B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.8kg
P36F17M-RD1A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.2kg
P36F17M-RD1B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.8kg
P36F17M-RD1C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[+10"/-5"]	9.4kg
P36F17M-WH1A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.2kg
P36F17M-WH1B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.8kg
P36F17M-WH1C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[+10"/-5"]	9.4kg
P36F17M-YL1A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.2kg
P36F17M-YL1B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.8kg
P36F17M-YL1C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[+10"/-5"]	9.4kg
P36F17M-BU1A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.2kg
P36F17M-BU1B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.8kg
P36F17M-BU1C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[+10"/-5"]	9.4kg
P36F17M-GN1A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.2kg
P36F17M-GN1B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.8kg
P36F17M-GN1C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[+10"/-5"]	9.4kg
P36F17M-BL2A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.2kg
P36F17M-BL2B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.8kg
P36F17M-BL2C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[+10"/-5"]	9.4kg
P36F17M-RD2A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.2kg
P36F17M-RD2B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.8kg
P36F17M-RD2C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[+10"/-5"]	9.4kg
P36F17M-WH2A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.2kg
P36F17M-WH2B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.8kg
P36F17M-WH2C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[+10"/-5"]	9.4kg
P36F17M-YL2A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.2kg
P36F17M-YL2B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.8kg
P36F17M-YL2C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[+10"/-5"]	9.4kg
P36F17M-BU2A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.2kg
P36F17M-BU2B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.8kg
P36F17M-BU2C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[+10"/-5"]	9.4kg
P36F17M-GN2A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.2kg
P36F17M-GN2B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.8kg
P36F17M-GN2C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,100-120/200-240V/30A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[+10"/-5"]	9.4kg

B

B

A

A

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

SIGN _____
DATE _____
PRINT _____

TITLE
INTELLIGENT SERIES PDU
P36F17M-XYZ
CUSTOMER DRAWING

ITEM REVISION NAME:
DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)
0<L<50 ±0.5
50<L<250 ±1.0
250<L<500 ±1.5
500<L<1000 ±2.5
1000<L<2000 ±4.0

MATERIAL/COLOR:
N/A

DRAWING NUMBER:
P36F17M_DC

DRAWN BY: GEORGE DATE: 10/11/2017 CHK: SEAN SCALE: NONE

SHT 2 OF 2 SCALE: B

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36F17M
01A	10/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36F17M