


Through-type terminals with spring-loaded connection, Cross-section: 1.5 mm², Width: 4.2mm, Color: orange

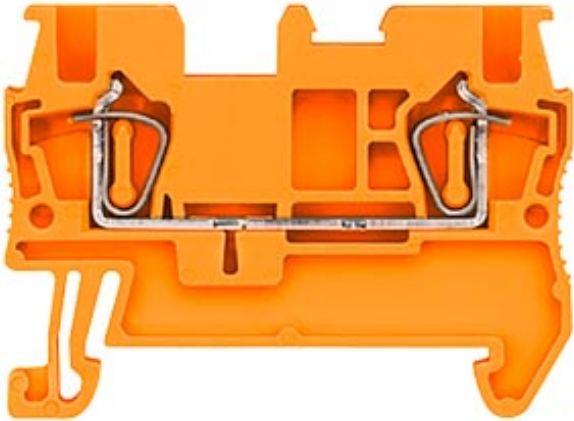

Model	
Product brand name	ALPHA
Product designation	ALPHA FIX terminal blocks
Design of terminal / Terminal levels internally linked	No
General technical data	
Terminal contact spacing	4.2 mm
Operating voltage / rated value	500 V
Protection class	
Combustibility class acc. to UL 94	V0
Main circuit	
Operating current / rated value	17.5 A
Appearance	
Color	orange
Product details	
Product component / required / connection plate	No
Number	

Number of terminal levels	1
Number of terminal points / per terminal level	2
Connections	
Wire stripping length	10 mm
Connectable conductor cross-section	1.5 ... 1.5 mm ²
<ul style="list-style-type: none"> • solid • stranded • finely stranded <ul style="list-style-type: none"> — with core end processing — without core end processing 	1.5 ... 1.5 mm ²
Type of electrical connection	
<ul style="list-style-type: none"> • 1 • 2 	spring-loaded terminal
	spring-loaded terminal
Position / of the terminal	top

Mechanical Design	
Mounting type	DIN rail 35 mm
Net weight	5 g
Material / of the insulating body	Other
<ul style="list-style-type: none"> • during operation 	-25 ... +55 °C

Certificates		
Design tested acc. to type of protection / EEx e	No	
General Product Approval	Declaration of Con- formity	other



CSA



UR



EG-Konf.

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WH2000-0AE04>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WH2000-0AE04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH2000-0AE04

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

