



Reduced voltage pump panel with MCP
 Auto transformer
 Controller half size 2 1/2
 Maximum voltage rating 600VAC
 Max Hp 60Hz: NA@200V; NA@230V; 30@460V; NA@575V
 Solid-state overload relay
 Control voltage 110VAC 50Hz / 120VAC 60Hz
 NEMA Type 3/3R enclosure



Image is representative and may not depict the actual product.


| | |
|---|--|
| General technical data: | |
| Weight | 186 lb |
| Height x Width x Depth | 43 x 24 x 11 in. |
| Finger-safe (main circuit / control circuit) | NA / NA |
| Maximum altitude | 6560 ft |
| Ambient storage temperature | (-30 to 65)°C / (-22 to 149)°F |
| Ambient operating temperature | (-20 to 40)°C / (-4 to 104)°F |
| Humidity (% non-condensing) | (no data) |
| Rated impulse voltage resistance | (no data) |
| Rated insulation voltage | (no data) |
| Country of origin | USA |
| Contactors: | |
| Number of NO main contacts | 3 |
| Amp rating | 60A |
| Mechanical operating cycles | 10,000,000 |
| Internal/standard auxiliary contact: | |
| Number of NC / NO auxiliary contacts | 0NC / 1NO |
| Rating | 10A@600VAC (A600), 5A@600VDC (P600) |
| Optional auxiliary contact: | |
| Max number of NC / NO auxiliary contacts | 7 total |
| Rating | 10A@600VAC (A600), 5A@600VDC (P600) |
| Coil: | |
| Voltage | 110VAC 50Hz / 120VAC 60Hz Coil |
| Sealed watts | 8.6W |
| Inrush / sealed power | 218 / 25 VA |
| Normal coil operating limits (% of rated voltage) | 85% - 110% |
| Typical drop-out volts (% of rated voltage) | 50% |
| Pick-up time / Drop-out time | 19-29 / 10-24 msec |
| Overload Relay: | |
| Current range | 25–100A |
| Trip Class | Class 5 / 10 (factory set) / 20 / 30 |
| Trip detection | Overload, phase failure, phase unbalance, ground fault |
| Phase failure sensitivity | Trip time after phase-loss: < 3 sec |
| Repeat accuracy | Within 1% |
| Reset options | Manual, automatic and remote |
| External reset | Yes |
| Test function | Electronics & manual actuation |
| Conformal coating on printed circuit board | Yes |
| Number of NC / NO auxiliary contacts per overload relay | 1NC / 1NO |
| Rating of auxiliary contacts | 5A@600VAC (B600), 1A@250VDC (R300) |
| Single contact isolation | 600V |
| Dual contact isolation | 300V differing polarity / 600V common polarity |

| | |
|--|---|
| Motor Circuit Protector (magnetic trip only): | |
| Rating | 50A |
| Instantaneous trip range | 180 - 600A |
| Enclosure: | |
| Type | NEMA Type 3/3R enclosure |
| Rating | Weather proof for outdoor use |
| Mounting/wiring: | |
| Mounting orientation | Vertical |
| Mounting type | Surface |
| Line side connection type / torque | Box lug / (refer to actual product for torque specs) |
| Line side solid & stranded conductors | 1x(10 AWG - 1/0 AWG) 75°C CU/AL |
| Load side connection type / torque | Box lug / 45 lb-in. |
| Load side solid & stranded conductors | 1x(14 - 2 AWG) 75°C AL or CU |
| Coil connection type / torque | Screw / 5 lb in. - 12 lb in. |
| Coil solid & stranded conductors | 2 x (16 - 12 AWG) CU 60/75°C |
| Main auxiliary contact connection type / torque | Screw / 10 - 15 lb-in |
| Main auxiliary contact solid & stranded conductors | 1 x (12 AWG), 2 x (16 - 14 AWG), 2 x (18 - 16 AWG) 75°C CU |
| OLR auxiliary contact connection type / torque | Screw / 7 lb in. - 10 lb in. |
| OLR auxiliary contact solid & stranded conductors | 2 x (20 - 14 AWG) CU 60/75°C |
| Short circuit current rating: | |
| Factory installed motor circuit protector | 100kA@480V; 25kA@600V |
| Certificates/approvals: | |
| | UL (file no. E185287) cUL (file no. E185287 for Canada) CSA (file no. 006535_C_000) ISO 9001 certification |
| Additional information: | |
| | Brochure OLR instruction sheet & trip curves |

SIEMENS

49EB36G0432511 Outline 43x25x11 NEMA 1,3R,4,4X,12

E87010-A0319-T005-A4-49EB

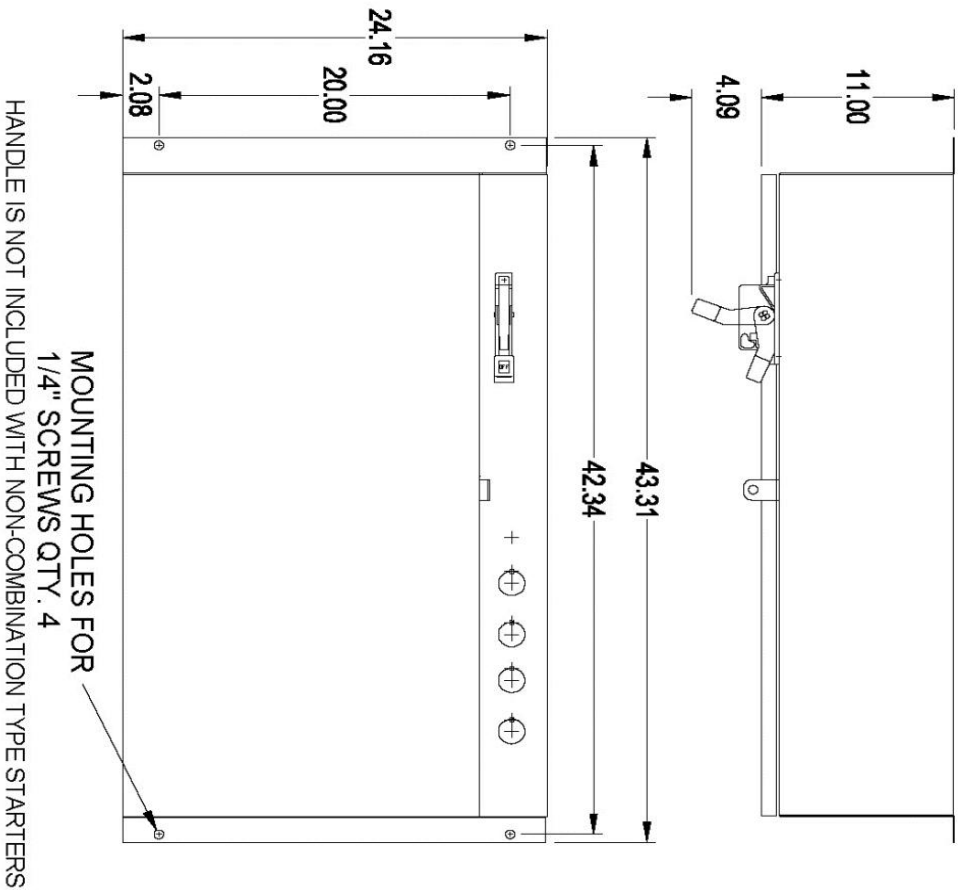

DIMENSIONS ARE IN INCHES.

REF. D68374001

SCHEMATIC DIAGRAM

Class 36, 37, 88 Auto-Transformer Size 1-7

