

TM-PF30 S47-D0 Terminal module for Contact multiplier
 PM-D F5 for actuator connection for max. 4 single-
 channel actuators for max. 2 2-channel actuators

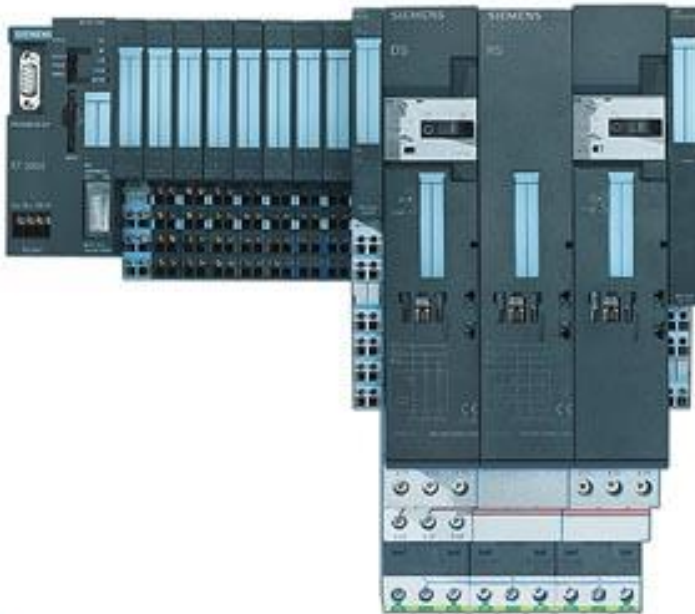


Figure similar

| General technical data: | | |
|--|----|---|
| Product designation | | Terminal module |
| Product type designation | | TM-PF30 S47-D0 for PM-D F5 |
| Design of the product | | for contact multiplier |
| Mounting height | mm | 196.5 |
| Installation width | mm | 30 |
| Installation depth | mm | 102 |
| Protection class IP | | IP20 |
| Insulation voltage rated value | V | 500 |
| Operating voltage | | |
| • at DC rated value | V | 24 |
| Operating current rated value | A | 10 |
| Type of connectable conductor cross-sections | | |
| • solid | | 1x (0.14 ... 2.5 mm ²) |
| • finely stranded with core end processing | | 1x (0.14 ... 1.5 mm ²), acc. to IEC 60947 |
| • at AWG conductors | | |
| — solid | | 1x (18 ... 22) |

— stranded

1x (18 ... 22)

Installation/ mounting/ dimensions:

| | | |
|---|-----|-----------------------------|
| Size of the screwdriver tip | | Standard screwdriver Size 1 |
| Tightening torque with screw-type terminals | N·m | 0.4 ... 0.7 |

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1903-1AD10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1903-1AD10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1903-1AD10&lang=en

last modified:

07/25/2019